Wireless World

JUNE 1951 · TWO SHILLINGS

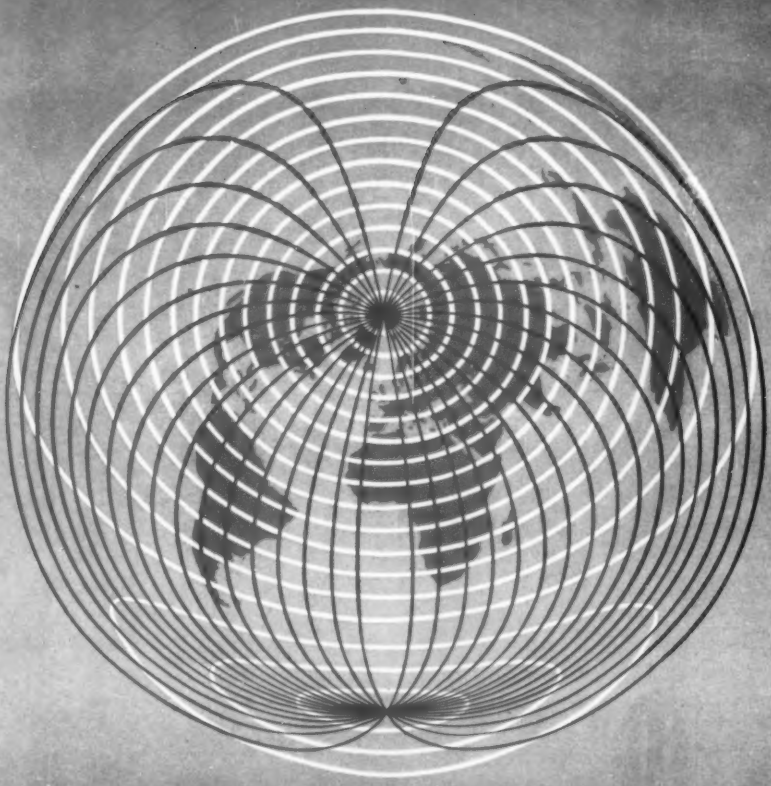

RADIO, TELEVISION AND ELECTRONICS

B.B.C. INSTALL BICC R.F. CABLES IN LIME GROVE T/V STUDIOS

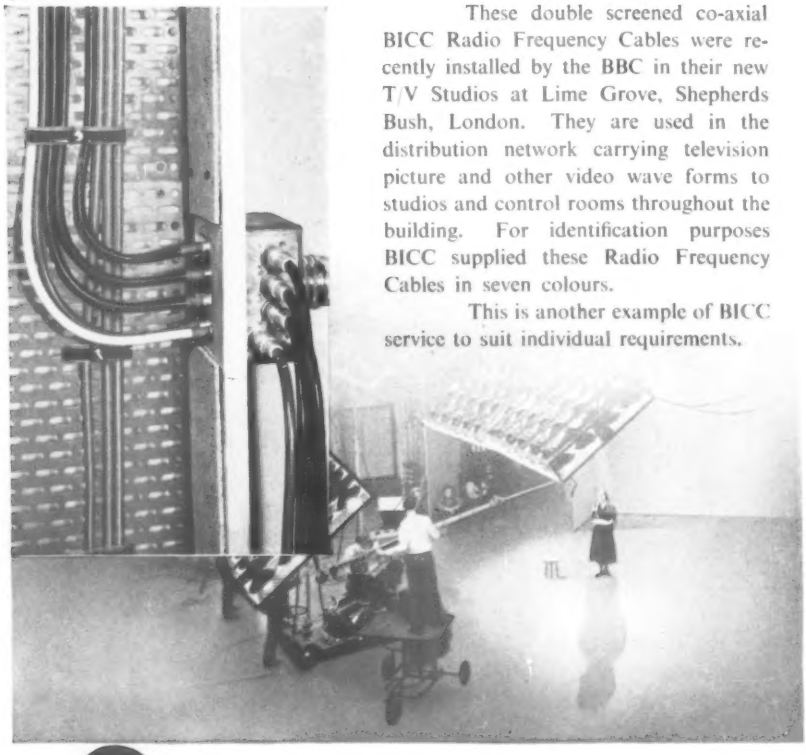

These double screened co-axial BICC Radio Frequency Cables were recently installed by the BBC in their new T/V Studios at Lime Grove, Shepherds Bush, London. They are used in the distribution network carrying television picture and other video wave forms to studios and control rooms throughout the building. For identification purposes BICC supplied these Radio Frequency Cables in seven colours.

This is another example of BICC service to suit individual requirements.

B.I. Callender's

RADIO FREQUENCY CABLES

BRITISH INSULATED CALLENDER'S CABLES LIMITED
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2

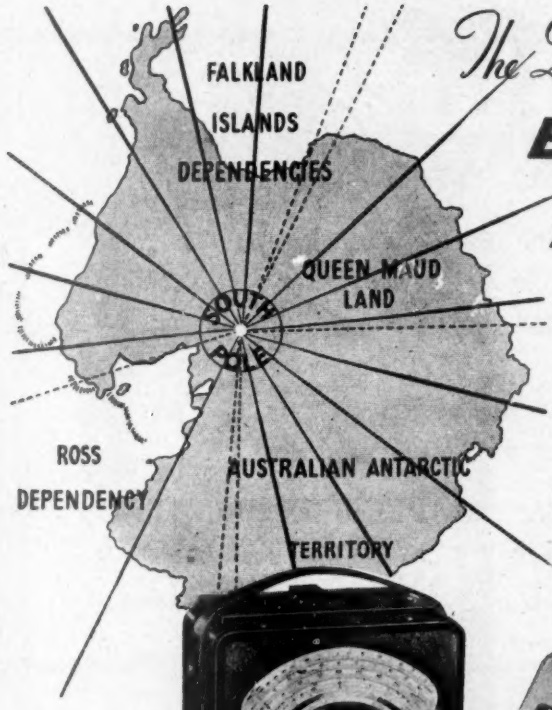

The Queen Maud Land EXPEDITION

Relies on 'AVO' INSTRUMENTS

First of its kind in Polar history, the Norwegian-British-Swedish Antarctic expedition is spending 2½ years far beyond the ice-girdled coasts of a region where man has not hitherto set foot. A primary aim of the explorers, who are fully equipped for scientific research, will be a complete meteorological survey which may show why the world is growing warmer.

Radar is included in the modern surveying apparatus, and at the request of Mr. G. de Q. Robin, the British party's Australian Radar expert, we have provided an "Avo" Electronic TestMeter and two Model 7 Universal AvoMeters. We are honoured that "Avo" instruments have been chosen for such important work under conditions so exceptionally exacting.

MODEL 7 UNIVERSAL AVOMETER

The world's most widely used combination electrical measuring instrument; it provides 50 ranges of readings (**current, voltage, resistance, capacity, power output** and **decibles**) on a 5-inch hand-calibrated scale. An automatic overload cutout safeguards it against misuse. It is compact, portable and self-contained and the small power consumption (the total resistance of the instrument is 500,000 ohms) makes this meter particularly suitable for all radio and electrical testing.

Size: 8in. × 7¼in × 4¼in
Weight: 6½ lbs.

£19 : 10s.

The AVO ELECTRONIC TESTMETER

Robust and portable, this is a 56-range instrument combining the sensitivity of a delicate galvanometer with the sturdiness of an ordinary multi-range meter. Basically a highly stable D.C. Valve Millivoltmeter, it can be quickly set up for any test requiring accuracy and negligible loading on the circuit. A well designed H.F. probe enables readings to be made at frequencies up to 200 Mc/s. Operates on 100–130 V. and 200–260 V., 50–60 c/s A.C.

Size: 12½in. × 9in. × 5¼in.
Weight: 12½ lbs.

£40

PRECISION ELECTRICAL TESTING INSTRUMENTS

Fully descriptive pamphlets on application to the Sole Proprietors and Manufacturers:

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
WINDER HOUSE • DOUGLAS STREET • LONDON • S.W.1 *Telephone: VICTORIA 3404/9*

Q.M.1

R&A

Letters of Credit

One of our youthful fancies was that in the years ahead the initials "R. & A." should become "Letters of Credit" — not in a legal sense perhaps, but in all that the phrase implies.

For once, fancy has become fact . . . and now that we are of age, we are proud to proclaim it.

REPRODUCERS & AMPLIFIERS LIMITED

WOLVERHAMPTON · ENGLAND

Telephone: W'hampton 22241 (5 lines) Telegrams: Audio, Wolverhampton

TELCON LINKS TWO GREAT EVENTS

Telcon's founder, The Gutta Percha Company, exhibited at the Crystal Palace in Hyde Park and was awarded one of the coveted Council Medals of the Exhibition. In 1850 it had made the first submarine telegraph cable to be laid between England and France, the centenary of which was celebrated last year. From such adventurous beginnings has grown the present Telcon organisation, the activities of which now cover a wide field in engineering and industry at home and overseas. Again, in 1951, the Festival of Britain Exhibition includes some examples of the outstanding Telcon developments of the present century.

TELCON CABLES
TELCON METALS
TELCON PLASTICS

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO. LTD.

Head Office: 22 Old Broad Street, London, E.C.2. Telephone: LONdon Wall 7104
Enquiries to: Telcon Works, Greenwich, S.E.10. Telephone: GREenwich 3291

Mullard

REVIEW OF NEW AND CURRENT VALVES

COLD CATHODE THYRATRON 1267

The Mullard 1267 is a Cold Cathode valve of large current-carrying capacity, high stability and long life. These features result from improved cathode activation and relative freedom from photoelectric and temperature effects.

Using the 1267 as a simple switch, only microwatt powers need be interrupted in the grid circuit (acting as a non-inductive load) to close a relay in the anode circuit. In such applications the switch contacts in the grid circuit are relieved of large and destructive inductive loads, whilst the contact resistance may vary over a wide range without affecting the operation of the tube. Applied in this and similar ways, the Mullard 1267 is ideal for use in remote-controlled power switching systems; welding and industrial engineering timers; sequential timers; and a variety of alarm and protection systems.

PRINCIPAL CHARACTERISTICS

*Max. Peak Operating Anode Voltage	225V
Positive Grid Voltage for Ignition	70-90V
Max. Grid Current for Ignition (Va=140V)	100μA
Valve Voltage Drop	70V
Max. Continuous Cathode Current	25mA
Max. Peak Cathode Current	100mA

*Above this voltage ignition may occur at Vg=0

LONG LIFE MERCURY VAPOUR RECTIFIERS

Reliability, stable emission and long life are among the important features of the Mullard range of Mercury Vapour Rectifiers.

The high degree of reliability is ensured through closely controlled manufacturing processes, whilst stable emission is obtained through the use of special double spiral filaments so designed that the emissive coating is firmly keyed to the wire.

An important feature contributing to the long life of these valves, is the use of zirconium-coated anodes. This results in the elimination of " foreign " gases, thus reducing the positive ion bombardment of the cathode.

In addition to these important design features, the dependability in service of the Mullard range of Mercury Vapour Rectifiers is further ensured through the application of rigorous back-arc tests at high voltages.

TYPE	Vf (V)	If (A)	P.I.V. max. (KV)	Ia(av) max. (A)	Full load D.C. Output* (KV)	(A)
RGI-240A	4.0	2.7	6.5	0.25	2.0	0.5
RG3-250	2.5	5.0	10	0.25	3.15	0.5
RG3-1250	4.0	7.0	13	1.25	4.14	2.5

* Two valves in single-phase full wave circuit.

A RANGE OF COMPACT FLASH TUBES

In presenting their range of compact flash tubes, Mullard make available, to both research workers and industrial designers, a comprehensive series of reliable light sources of a high intensity and extremely short duration.

Characterised by their high luminous efficiency and ease of triggering, these tubes are capable of producing many thousands of flashes without deterioration in either quality or output of light. For those who require line source flash tubes, a full range of straight tubes is available.

LSD2	35 joule microsecond flash tube.
LSD3 LSD3A	100 joule tube for portable equipment.
LSD5	1,000 joule tube for studio equipment.
LSD7	200 joule tube for portable equipment.
LSD8	Stroboscopic flash tube with a maximum dissipation of 30 watts.
LSD9	1,000 joule quartz tube for high power ultra-violet flash.

MULLARD LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2.

MVT97E

STRICTLY EXPORT ONLY

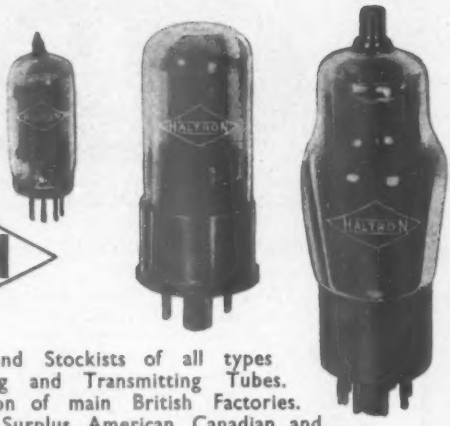

HALTRON

Leading Exporters and Stockists of all types of Radio Receiving and Transmitting Tubes.
Current Production of main British Factories.
Ex-Government Surplus, American, Canadian and British Special Purpose Tubes in Original Brands.
Suppliers to Foreign Governments, Airlines, etc.

HALL ELECTRIC LTD
89, CHARLOTTE ST., LONDON, W.1.
Phones: MUSEUM 9681 (5 lines)
Cables: HALLECTRIC, LONDON

LONG PLAYING ON STANDARD RADIOGRAMS

BY MEANS OF THE CHANCERY LONG PLAYING ATTACHMENT G33
(Patents pending)

This instrument is precision engineered to convert existing equipment (78 r.p.m.) to 33⅓ r.p.m. This is effected by an epicyclic transmission and reduction mechanism, ensuring a constant speed of 33⅓ r.p.m. necessary for true reproduction of long playing records. Elimination of "wow" and waver has been achieved to a remarkable extent. The G.33 has been designed for simplicity of conversion, having merely to be placed on the existing turntable, in the same manner as a gramophone record. When desired to revert to 78 r.p.m. records removal is just as simple. It is suitable for the conversion of almost all Automatic Changers.

PRICE:
£3.12.6
(Inclusive of Purchase Tax)

Chancery INSTRUMENT

Chancery High-Fidelity Pickups are available for Long Playing. Prices range from £2-13-0 (inc. tax).

AS SUPPLIED TO MESSRS. DECCA FOR INCORPORATION IN THEIR HIGH-FIDELITY INSTRUMENTS.

CHANCERY PRECISION INSTRUMENT SERVICE LTD.
Sales Department: 64, GEORGE STREET, BAKER STREET, LONDON, W.1
Telephone: WELbeck 4715 & 1485

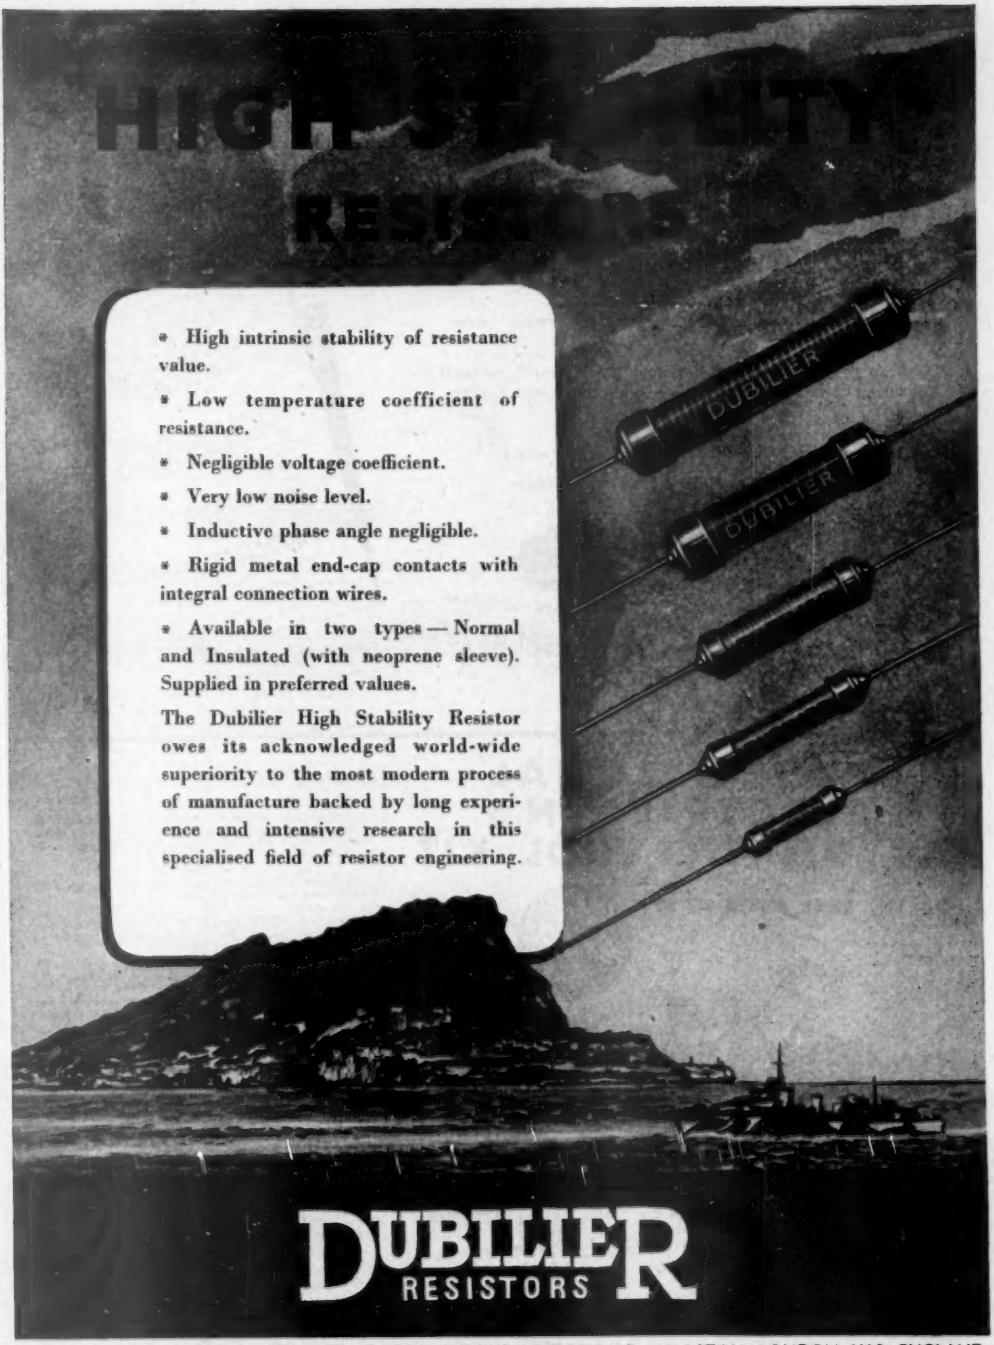

* High intrinsic stability of resistance value.
* Low temperature coefficient of resistance.
* Negligible voltage coefficient.
* Very low noise level.
* Inductive phase angle negligible.
* Rigid metal end-cap contacts with integral connection wires.
* Available in two types — Normal and Insulated (with neoprene sleeve). Supplied in preferred values.

The Dubilier High Stability Resistor owes its acknowledged world-wide superiority to the most modern process of manufacture backed by long experience and intensive research in this specialised field of resistor engineering.

DUBILIER CONDENSER CO. (1925) LTD., DUCON WORKS, VICTORIA RD., N. ACTON, LONDON, W.3, ENGLAND
Phone : Acorn 2241 (5 lines). Grams : Hivoltcon, Wesphone, London. Cables : Hivoltcon, London, Marconi International Code

D54a

ALL You Want for QUALITY RECORDING!

The LANE PRECISION BUILT TAPE TABLE

- Heavy balanced flywheel gives extreme freedom from "wow" and "flutter".
- High fidelity Record Play Back and Erase Heads in mumetal shields to ensure wide range response with correct amplifiers.
- Fast Re-wind.
- Very simple mechanical action—nothing to go wrong.
- Dimensions—11½" x 15½" x 7" 200-250v A.C. only.

PRICE £16·10·0 CARRIAGE AND PACKING 10/-

COMPONENTS

The following components can be supplied separately:

HIGH FIDELITY HEADS (complete with Mumetal Shield)
VC Record/Play Back £2 10 0
VE Record/Play Back £2 15 0
VP Super Record/Play-Back £2 15 0
VE Erase £2 2 0

OSCILLATOR UNIT
Constructed on small chassis. Provides r.f. for Erase and Bias. Each unit checked for wave-form. Complete with Valve £3 10 0

TAPE
New high coercive tape for high fidelity recording at low speeds.
DUREX 1200 ft. reel £1 5 0
EMTAPE 1200 ft. reel £1 15 0

COMPLETE RECORDERS AND AMPLIFIERS
Available at competitive prices
Send for comprehensive list.
Trade enquiries invited

SOLE DISTRIBUTORS THROUGHOUT THE WORLD
VERDIK SALES LTD. 17 SHAFTESBURY AVE. LONDON, W.1. Phone Gerrard 8266

PROFESSIONAL ELECTRICIAN'S AUTOMATIC TOOL KIT

FOR THE REAL ENTHUSIAST

Yours for 60/- Deposit

A first-class Kit of Tools specially chosen by a qualified Electrician and designed to cover the widest possible range of work that comes along for both amateur and professional.

The finest tools give the best finish and make a good Electrician even more efficient.

Cash price £13.15.0, plus 5/- for carriage, or send only 60/- deposit and 5/- for carriage, balance payable by 8 monthly instalments of 28/7d.

Extra strong 18-gauge automatic steel tool box, stove enamelled blue or red. The box opens under slight pressure on the handle and closes automatically when lifted. Large capacity, 5 trays to facilitate quick selection of tools.

SPECIFICATION

CONTAINS 55 TOOLS, including ⅜, ¼ and ½ Wall Drills, Floor Board Chisel, Plugging Chisel, Cold Chisels up to 16 inches, Wood Chisels, Electrician's Brace with Twist Bits, Insulated Combination Pliers, Insulated Radio Pliers, Side Cutters, Punches, Electrician's Screwdrivers, Heavy Screwdriver, Pipe Grips, Tenon Saw, Joiner's Hammer, Ball Pane Hammer, Pin Hammer, Bradawls, Set of Whitworth Double-end Spanners, Pincers, B.A. Socket Wrenches, Pad Saw, Tubular Hack Saw Frame, Files, Tinsnips, Rose Bit, Gimlets, Gimlet Bits and Insulated Screwdriver, etc.

Also write for illustrated list of Carpenters' and Engineers' Tool Kits, all on equally advantageous terms.

J. A. DAVIS & CO. (Dept. W.S.W.19), 94-104 DENMARK HILL, LONDON, S.E.5

A POINT OF DETAIL No. 3 ★

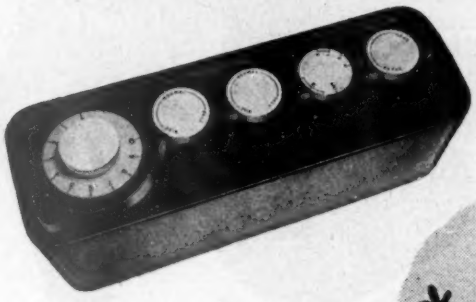

SLOPE . . .
and its rate of change

The present possibility of using wide range loudspeakers for the reproduction of commercial programmes inevitably involves some control over bandwidth if the highest quality is to be obtained at all times.

The three main desirable variables are
(a) control of final slope of attenuation,
(b) control of rate of change of slope,
(c) control of frequency of turnover.

In the Q.U.A.D. amplifier, the final slope and the rate of change of slope are combined in a single continuously variable control with a range as shown.* The whole characteristic may be switched into the harmonic range at two frequencies. In this way, the rate of change need be no more than is required by the programme.

The above is just one more reason why the Q.U.A.D. amplifier will give you the closest approach to the original sound from the programme to be reproduced.

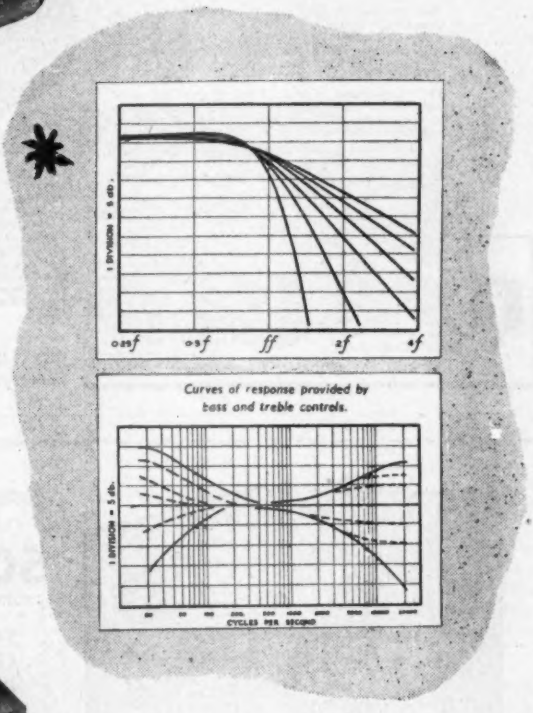

THE Q.U.A.D. AMPLIFIER

COMPLETE IN TWO UNITS AS ILLUSTRATED

£35

Write for the Q.U.A.D. booklet . .

ACOUSTICAL MANUFACTURING CO LTD

HUNTINGDON • HUNTS • TEL: 361

Presenting

GOODMANS

HIGH FIDELITY—12" P.M.

TWIN CONE AXIOM 150

This 12" high fidelity unit has a twin curvilinear diaphragm (Patent No. 451754). A carefully designed magnet assembly using anisotropic material provides a total flux of 158,000 maxwells on a 1¼" pole. The back centring device is a dustproof bakelised linen disc with concentric corrugations.

The combination of these features gives this precision-built instrument an outstandingly wide coverage from 40 to 15,000 c.p.s. free from base modulation effects.

An ideal high fidelity reproducer for the record enthusiast and the connoisseur of wide range musical reproduction, it gives exceptionally fine transient and frequency response.

Frequency Coverage	40/15,000 c.p.s.
Overall Diameter	12⅜"-31.3 cms.
Overall Depth	6 ¾"-17.6 cms.
Fundamental Resonance	55 c.p.s.
Voice Coil Diameter	1¾"-4.4 cms.
Voice Coil Impedance	15 ohms at 400 c.p.s.
Maximum Power Capacity	15 Watts Peak A.C.
Flux Density	14,000 gauss
Net Weight	12 lbs. 13 oz.-5.8 kg.
Finish	Grey Rivalling Enamel

£10.5.6 LIST

For use with this model we recommend Goodmans High Fidelity Heavy Duty Output Transformer Type H.4. Nett Weight 5 lbs.—2.3 kg.

A Bass Reflex Cabinet measuring approximately 30"x23"x16" and a corner cabinet have been specially designed for this loudspeaker and working drawings are available

GOODMANS INDUSTRIES LIMITED
Lancelot Road, Wembley, Middlesex. WEMbley 1200

TELEVISION & RADAR

SQUARE WAVES

THIS OSCILLOSCOPE HAS A STEPPED Y-AMPLIFIER GAIN CONTROL COMPENSATED, ON EACH STEP OF APPROXIMATELY 6 DB., TO ENSURE ACCURATE REPRODUCTION OF SQUARE WAVES

OTHER FEATURES

BUILT-IN WOBBULATOR
TIME-BASE 10-250,000 c/s
BRILLIANCE MODULATION
SHIFT CONTROLS, etc. etc.

PRICE £25 MODEL 11W

WRITE FOR DETAILS

HIRE PURCHASE TERMS AVAILABLE

ERSKINE LABORATORIES LTD., SCALBY, SCARBOROUGH, YORKS.

(THE DEVELOPERS and MANUFACTURERS OF THE NOW FAMOUS TYPE 13 FOR THE SERVICES)

THE MASTER SOUND SYSTEM

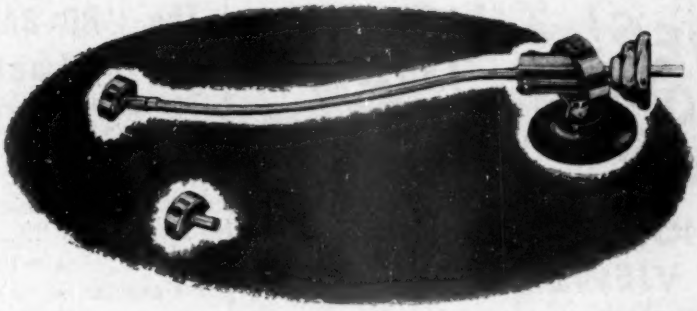

mss lightweight extended range reproducer P100

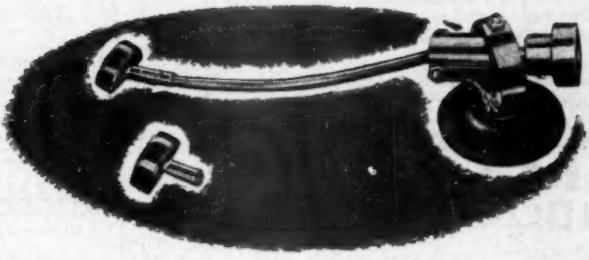

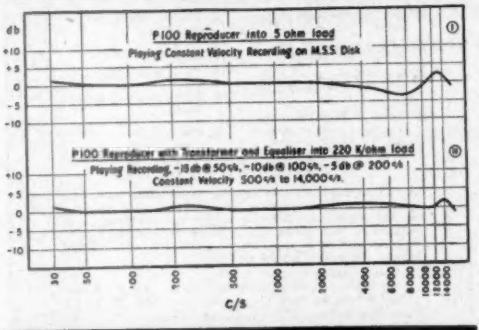

This new unit, although primarily developed for playing lacquer coated disks, is equally suitable for use with commercial pressings. It is essentially a lightweight unit, so light indeed, that when placed on a revolving blank lacquer disk, *it does not mark the disk in any way.* It has an unusually free movement, yet without any tendency to pull towards the centre of the disk. This, and the very low downward pressure of the point *reduces record wear to the barest minimum.*

Two types of plug-in, instantly interchangeable heads are available, i.e.: 'standard' and 'microgroove.' The armature assembly itself in both types is readily removed for replacement in the event of damage.

Inherent resonances have been placed well outside the normal working frequency range, and when correctly equalised, using the M.S.S. type BR/2 Unit the overall response is substantially flat from 30 to 10,000 c/s.

BRIEF SPECIFICATION

Output (unequalised)	1 Volt minus 58 db from a 1 cm/sec + 10 db direct recording.
Output (equalised)	1 Volt minus 34 db from a 1 cm/sec + 10 db direct recording.
Output impedance (unequalised) ...	5 ohms.
Output impedance (equalised) ...	100,000 ohms.
Downward pressure on needle point ...	5 to 10 grms.

P100, Complete with one head	£6-0-0 (plus P.T.)
Additional Head (either type)	£2-10-0 (plus P.T.)
BR/2 Equaliser & Transformer Unit	£1-17-6

M·S·S RECORDING CO LTD · POYLE CLOSE · COLNBROOK BUCKS

Telephone: Colnbrook 284

YES! THIS SOLVES THE AERIAL PROBLEM FOR THOUSANDS OF VIEWERS

Cheap enough to instal in THAT OTHER ROOM, avoiding a long lead-in and possible loss of efficiency. Fitted in 10 minutes in any odd corner, round a door, window or skirting, it solves the problem of expense and other difficulties of outdoor installation.

'TELEFLEX' INDOOR TV AERIAL

The COLLECTOR elements are spaced in semi-opaque plastic almost invisible in a room of average decoration. An unbreakable die-cast JUNCTION BOX finished in light cream, together with a standard length of FEEDER CAELE, complete this remarkable aerial.

15/- Complete with fixing screw and pins. Available for all Transmissions

TELECRAFT are manufacturers of a full range of TV Aerials & Accessories (Lashings, Masts, etc.) to meet every requirement.

SEND FOR ILLUSTRATED BROCHURES AND PRICE LISTS

TELECRAFT LIMITED

THORNTON HEATH, SURREY

Tel. : THOrnton Heath 1191-2-3

Depots :
BRISTOL, BIRMINGHAM, WORTHING, MANCHESTER, STOKE-ON-TRENT

SCOTTISH ENQUIRIES:
LOUIS GRACE,
28 Langside Place
Glasgow, S.1.
Langside 4633

The "RD BABY DE-LUXE" Amplifier

This is the ideal amplifier for those requiring modest power at the highest standard of sound reproduction.

Main Amplifier
- ★ Push-pull output stage.
- ★ ± 1 DB. 15-30,000 cps.
- ★ Distortion at 5 watts not exceeding .5% total harmonics at 1,000 cps.
- ★ 24 DB. overall N.F.B.

Pre-amplifier
- ★ ± 1 DB. 20-20,000 cps.
- ★ Mic., p.u., and radio inputs.
- ★ Bass and treble cut and boost.
- ★ Controls can be adjusted to compensate for all types of recordings.

Price complete with engraved control panel **£16.10.6**

Also obtainable from — Webb's Radio, Gramophone Exchange Ltd., Tele-Radio (1943) Ltd.

For the duration of the Festival of Britain demonstrations of our equipment may be heard daily from 10 a.m.—5.30 p.m., and visitors to London are cordially invited to our Greenwich showroom.

ROGERS DEVELOPMENTS CO.

"Rodevco House," 116, Blackheath Road,
GREENWICH, S.E.10.
Telephone : TIDeway 1723

The New BRADMASTER *Model 5 Tape Desk for 1951*

- Built to professional standards.
- Two speeds—3¾ and 7½ inches per second.
- Fast wind and rewind—full reel rewound in 1½ minutes.
- Heavy alloy flywheel. Freedom from "wow" and "flutter."
- Double servo brakes on each hub.
- Push Button control.
- Three heavy duty motors.
- Three shielded Bradmatic heads.
- Size: 13½in. x 15½in. x 6½in. deep.

Price £37.10.0

A PLUG BOX can also be fitted to the above equipment containing three compartments which provide shielding for the head leads and eliminating hum and cross talk. Also fitted with three coaxial plugs and sockets, facilitating connection of the desk to amplifiers, etc. **PRICE** (fitted underneath desk) **£1.5.0.**

Hi-fidelity magnetic sound heads : type 5 R.P. (record/play head)	£3	5	0	each
type 5 E (erase head)	£3	5	0	"
Super fidelity magnetic sound head, type 6 R.P. (record/play head)	£3	15	0	"
Screening Cans, best quality (all mumetal)		8	0	"
composite (constructed of steel and mumetal)		4	6	"
Oscillator coils		8	0	"
Tape on 7in. reels, 1,200ft. Emitape, type 65	£1	5	0	
G.E.C. Grade "A"	£1	10	0	
Durex type, MC 1—III	£1	15	0	

Trade Supplied. *Send for Lists to the Sole Manufacturers :*

BRADMATIC LIMITED

STATION RD. · ASTON · BIRMINGHAM 6

Phone: EAST 0574. Grams: Bradmatic, Birmingham

Introducing the lesser known pages of our catalogue

MARCONI INSTRUMENTS LIMITED

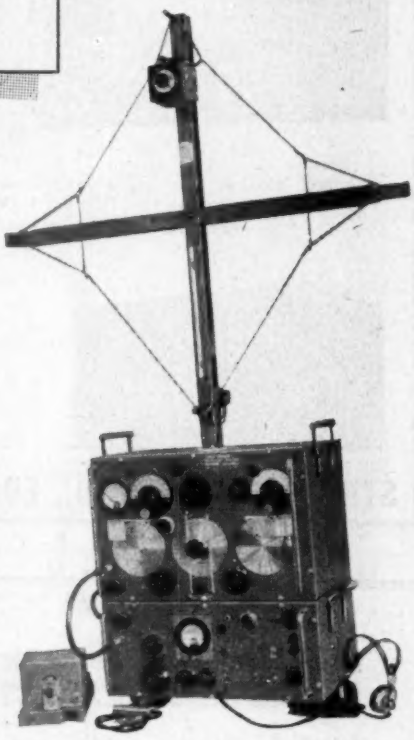

FIELD STRENGTH MEASURING EQUIPMENT

Type TME 18

It may not be generally known that, in our range of Communications Test Gear, we number certain unique instruments which, designed for highly individual functions, demonstrate the extraordinary virtuosity of Marconi engineers. The user of these specialised types turns naturally to Marconi Instruments for all his test gear—knowing that a mastery of the more intricate measuring problems makes light of those more commonly encountered.

FIELD STRENGTH MEASURING EQUIPMENT TME 18 operates in conjunction with a series of five interchangeable loop aerials to cover the frequency band 150 kc/s to 25 Mc/s. The measurement is carried out by the substitution of a locally generated e.m.f. of frequency and magnitude equal to that of the signal received. The method of calibration reduces to simple terms the computation of field strength in decibels relative to one microvolt per metre. Field strength range: minimum of 1μV to maximum of 5V per metre, depending on frequency. The output can be monitored by panel meter or writing recorder. The equipment can be arranged for operation from a car type accumulator or a.c. mains.

MARCONI INSTRUMENTS LTD., St. Albans, Herts. Telephone: St. Albans 6161/7

EDDYSTONE

COMMUNICATION RECEIVERS

MODEL 680. A high-grade instrument for Professional Communications requirements. Frequency coverage:—30 Mc/s to 1.12 Mc/s and 1120 Kc/s to 480 Kc/s.

£98 - 0 - 0 *(No Purchase Tax)*

MODEL 750. A fine, double superheterodyne receiver. Frequency coverage:—32 to 1.7 Mc/s and 1465 to 480 Kc/s.

£59 - 10 - 0 *(No Purchase Tax)*



MODEL 740. An outstanding receiver of first-class construction at a moderate price. Frequency coverage:—30.6 Mc/s to 1.4 Mc/s and 205 Metres to 620 Metres.

£35 - 15 - 0 *(No Purchase Tax)*

Please write for Technical Brochure

STRATTON & CO. LTD., EDDYSTONE WORKS, BIRMINGHAM, 31

S.G. BROWN

Precision

Sapphire Needle

For high Fidelity of Reproduction with minimum of wear on the record

FIVE TYPES TO CHOOSE FROM

The above are designed and manufactured to suit all types of pick-ups.

No. 1. "**Miniature**" jewel tipped needle for *light-weigh* pick-up.
No. 2. "**Straight**" jewel tipped needle for *crystal* pick-up.
No. 3. "**Trailer**" jewel tipped needle for *medium-weight* pick-up.
No. 4. "**Knee Bend Trailer**" jewel tipped needle for the older *heavy-weight* pick-up.
No. 5. "**Miniature Solid Sapphire**" needle for *light-weight* pick-up.

PRICES:—Nos. 1-4, **7/-** *plus Purchase Tax* **3/-**. *Postage* **6d.**
No. 5, **9/3** „ „ „ **4/1.** „ **6d.**

Your local dealer can supply.
In cases of difficulty, apply direct.

A "TIP" WORTH TAKING

An interesting and instructive Brochure giving advice on the choice of an S. G. Brown precision Sapphire Needle to suit your pick-up will be sent on request. Write Department "W"

Telephone:
Watford,
7241.

S.G.Brown, Ltd.

SHAKESPEARE STREET, WATFORD, HERTS.

CONSTANT VOLTAGE POWER SUPPLY UNITS

MODEL 101-C

Output: 250/400v. 0.250mA max.
Stability: Better than 0.1%.
Output Impedance: Less than 1 ohm.
Output Ripple: Less than 2mV. R.M.S.
Mains Supply: 200/250v. 45-60c/s.
Regulation down to zero load.



DETAILS ON REQUEST.

ALL-POWER TRANSFORMERS LTD.

CHERTSEY ROAD, BYFLEET, SURREY.

Tel: Byfleet 3224/5.

RADIO ENGINEERING
RADAR OPERATING
GROUND SIGNALLING
AIR SIGNALLING

Wherever your special interest lies.....

there's a place for YOU in the R.A.F.

Big things are happening in the Royal Air Force — notably on the radio side where the newest techniques of wireless and radar are now being adopted as standard practice. Men and women of skill and intelligence are urgently needed to take on the operation and maintenance of the newest and most varied equipment. It's a good life and it's packed with interest; pay is good from the start, with all basic living expenses found; and promotion — via the new Technician Ranks — can be extremely rapid. And don't forget: today you can make the R.A.F. a lifetime career with pension up to £5 a week when you retire. Find out more about it: send the coupon now.

Send for your copy of these booklets **NOW!**

(*Applicants from British Isles only*)

TO: ROYAL AIR FORCE, (W.D.248) VICTORY HOUSE, LONDON, W.C.2

Please send booklet describing life in the R.A.F. (*Tick which you require*)

A. On the ground		B. In the air	

Name .....

Address .....

..... Age .....

★ IF YOU ARE BETWEEN 14 AND 17 — AND KEEN — JOIN THE AIR TRAINING CORPS ★

MAINS TRANSFORMERS, FULLY INTERLEAVED, SCREENED AND IMPREGNATED. ALL GUARANTEED. ALL PRIMARIES ARE 200/250 v. Half Shrouded.

HSM63. (Midget). Output 250–0–250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. at 2 amps. 18/–
HS63. Output 250–0–250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. at 2 amps. 18/6
HS40. Windings as above. 4 v. at 4 amps., 4 v. at 2 amps. ... 18/6
Output
HS2. 250–0–250 v. 80 m/a. 21/–
HS30. 300–0–300 v. 80 m/a. 21/–
HS3. 350–0–350 v. 80 m/a. 21/–
HS2X. 250–0–250 v. 100 m/a. 23/–
HS7S. 275–0–275 v. 100 m/a. 23/–
HS30X. 300–0–300 v. 100 m/a. 23/–
HS3X. 350–0–350 v. 100 m/a. 23/–

Fully Shrouded

FSM63. (Midget). Output 250–0–250 v. 60 m/a., 6.3 v. at 3 amps., 5 v. at 2 amps. 18/6
Output
FS2. 250–0–250 v. 80 m/a. 23/–
FS30. 300–0–300 v. 80 m/a. 23/–
FS3. 350–0–350 v. 80 m/a. 23/–
FS2X. 250–0–250 v. 100 m/a. 25/9
FS7S. 275–0–275 v. 100 m/a. 25/9
FS30X. 300–0–300 v. 100 m/a. 25/9
FS3X. 350–0–350 v. 100 m/a. 25/9
All the above have 6.3–4–0 v. at 4 amps., 5–4–0 v. at 2 amps.
FS43. Output 425–0–425 v. 200 m/a., 6.3 v. 4 amps., C.T. 6.3 v. 4 amps., C.T. 5 v. 3 amps. Fully shrouded 51/–
FS43X. Input 200/250 v. Output 425–0–425 v. at 250 m/a., 6.3 v. at 6 amps., 6.3 v. at 6 amps., 5 v. at 3 amps. Fully shrouded 69/–
FS50. Output, 450–0–450 v. 250 m/a., 6.3 v. 2 amps., C.T. 6.3 v. 4 amps., C.T. 5 v. 3 amps. Fully shrouded 75/–
F30X. Output, 300–0–300 v. 80 m/a., 6.3 v. 7 amps., 5 v. 2 amps. Framed. Flying leads 31/9
F35X. Output, 350–0–350 v. 250 m/a., 6.3 v. 6 amps., 4 v. 8 amps., 4 v. 3 amps., 0–2–6.3 v. 2 amps. Fully shrouded 71/6
FS160X. Output, 350–0–350 v. 160 m/a., 6.3 v. 6 amps., 6.3 v. 3 amps., 5 v. 3 amps. Fully shrouded 45/–
FS43X. Output, 425–0–425 v. 250 m/a., 6.3 v. 6 amps., 6.3 v. 6 amps., 5 v. 3 amps. Fully shrouded 69/–
HS6. Output, 250–0–250 v. 100 m/a., 6.3 v. 6 amps., C.T. 5 v. 3 amps. For receiver R1355. Half shrouded 29/3
HS150. Output, 350–0–350 v. 150 m/a., 6.3 v. 3 amps., C.T. 5 v. 3 amps. Half shrouded 30/9
F36. Output, 250–0–250 v. 100 m/a., 6.3 v. 6 amps., C.T. 5 v. 3 amps. Half shrouded 30/9
FS120. Output, 350–0–350 v. 120 m/a., 6.3 v. 2 amps., C.T. 6.3 v. 2 amps., C.T. 5 v. 3 amps. Fully shrouded 33/–
FS256. Output, 250–0–250 v. 80 m/a., 6.3 v. at 6 amps., 5 v. at 3 amps. Fully shrouded 30/9
PR1. Output 230 v. at 30 m/a., 6.3 v. at 1.5 2 amps. 23/–
FS150. 350–0–350 v. 150 m/a., 6.3 v. 4 amps., 5 v. 3 amps. 34/9
The above have inputs of 200/250 v.

FILAMENT TRANSFORMERS

F4. Output, 4 v. 2 amps. 9/–
F6. Output, 6.3 v. 2 amps. 9/–
F6X. Output, 6.3 v. 0.3 amps. 6/–
FI2X. Output, 12 v. at 1 amp. 9/–
FI2. Output, 12.6 v. tapped 6.3 v. at 3 amps. 18/6
FI4. Output, 24 v. tapped 12 v. at 3 amps. 26/–
FI2 and F24 framed with Flying Leads.
FU6. Output, 0–2–4–5–6.3 v. at 2 amps. 11/–
F29. Output, 0–2–4–5–6.3 v. at 4 amps. 20/9
FU6 and F29 clamped with Flying Leads.
F5. Output, 6.3 v. at 10 amps. or 5 v. at 10 amps. or 12.6 v. at 5 amps. or 10 v. at 5 amps. 37/9
F6/4. Output, four at 6.3 v. tapped at 5 v. at 5 amps. per winding, giving by suitable series and parallel connections 24 v. at 5 amps., 20 v. at 5 amps., 18 v. at 5 amps., 15 v. at 5 amps., 12.6 v. at 10 amps., 10 v. at 10 amps., 6.3 v. at 20 amps., 5 v. at 20 amps. 57/–
F5 and F6/4 framed with flying Leads
FU12. Output 0–4–6.3 v. 3 amps. 19/6
FU24. Output 0–12–24 v. 1 amp. 19/6
The above have inputs of 200/250 v.

OUTPUT TRANSFORMERS

MOP1. Ratios 26, 46, 56, 66, 90, 120–1 50 m/a. max. current. C.T. for Q.P.P. Class B, etc. Secondary 2/4 ohms. Top panel and clamped, each 6/–
OP1. Midget Power Pentode, ratios 30, 60, 90–1, 40 m/a., Secondary 2/3 ohms, each 4/–
OP2. Midget Pentode, ratios 45–1, Secondary 2/3 ohms, 40 m/a. per doz. 39/6
OP10. 10/15 watts output. 20 ratios on Full and Half primary 19/9
OP30. 30 watts output, 20 ratios on Full and Half primary 28/6
Williamson's O.P. Transformer to Author's specification £4/3/6
Chokes for Williamson's Amplifier. 30H at 20 m/a. 15/6
10H at 150 m/a. 35/6
Choke C4. 60 m/a., approx. 8 H., 350 ohms. 5/–
Choke C5. 40 m/a., approx. 5 H., 360 ohms. 4/–
Choke C6. 50 m/a., 50 H., 1,500 ohms. 22/–
C7. 90 m/a., 180 ohms., clamped 6/3
C8. 360 Micro henries clamped 5/3
Belling Lee Co-Axial Plugs. Type 642/P., each 1/3
Belling Lee Co-Axial Sockets. Type 604/S, each 1/3
C.W.O. (add 1/- in £ for carriage), all orders over £2 carriage paid. Trade enquiries invited.

H. ASHWORTH (Dept. W.W.),
676, Gt. Horton Road, Bradford, Yorks.

URGENTLY REQUIRED

THE FOLLOWING EQUIPMENT IN ANY CONDITION:—

SIGNAL GENERATORS Type TF.144G, TF.390F or G, TF.517, 605B and 804B. Ex-Govt. types 30, 31, 51, 52, 52A, 53, 56, 57, 101, 103, 106 and others.

FREQUENCY METERS Type BC221, TS.174/U, TS.175, TS.69AP, and other types.

CRYSTALS FOR BC.221 FREQUENCY METERS.

ALSO:—IMPEDANCE OR UNIVERSAL BRIDGES, OSCILLOSCOPES, "Q" METERS, VARIACS, OUTPUT METERS, ETC.

Please write, call or phone:—

OAK ELECTRIC CO.,
175, UXBRIDGE RD., HANWELL, W.7
EALing 0779

Another book by G.A.Briggs

FOR SOUND ENTHUSIASTS AND MUSIC LOVERS

10/6 net POST FREE

Author of "LOUDSPEAKERS" & "SOUND REPRODUCTION," written, in his usual breezy and inimitable style.

190 pp., printed Fine Art paper, size 8½ x 5½, bound full rexine. 102 figures of which 27 contain 75 original oscillograms of sounds and piano tones.

Eighteen chapters including—Pianos in General; History and Construction of the Piano; Action & Pedals; Strings; Uprights and Grands; Tone, Toning and Tunings; Touch and Tone; Vibration and Harmonic Analysis; Choice and care of Instrument; Room Acoustics; Recording and Reproduction; The Teaching Angle; and a chapter on Pianists including INTERVIEWS WITH SEVEN WELL-KNOWN ARTISTS

AN INVALUABLE GUIDE TO ALL PIANISTS, STUDENTS AND TEACHERS AND ALL INTERESTED IN SOUND AND REPRODUCTION

Published by

WHARFEDALE WIRELESS WORKS
BRADFORD ROAD, IDLE, BRADFORD, YORKS
'Phone: Idle 461

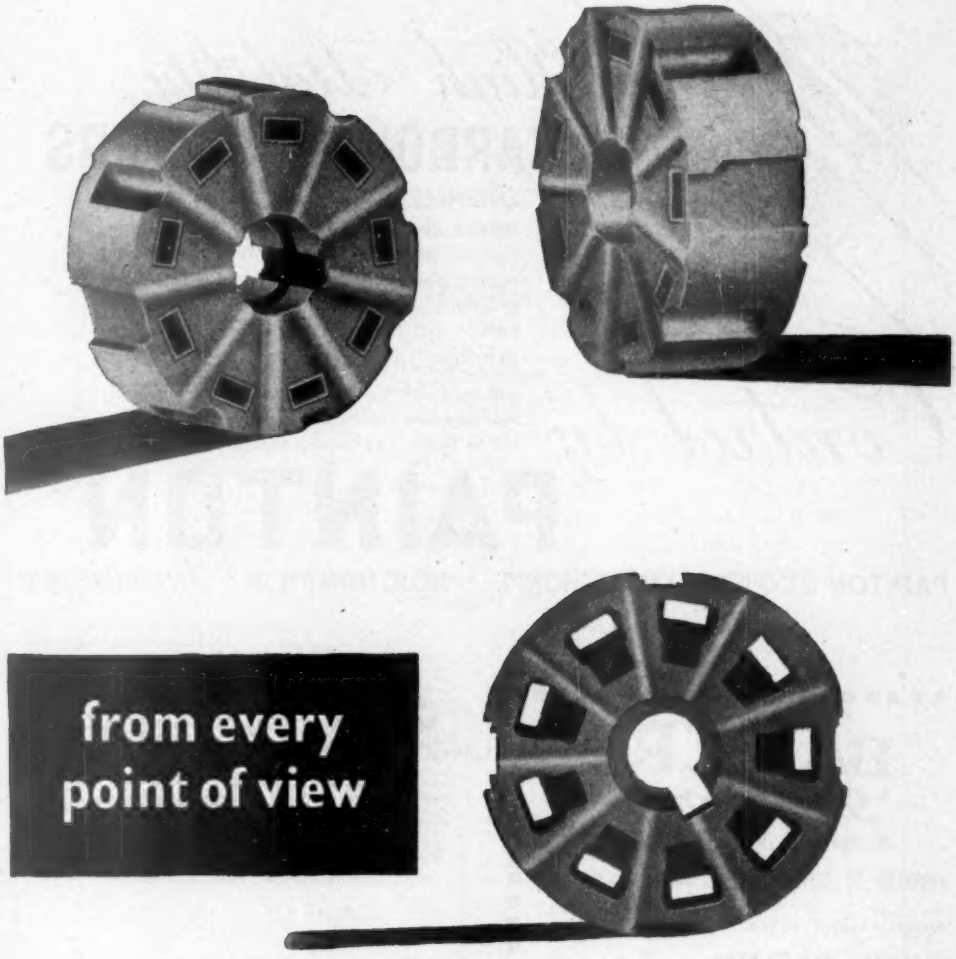

from every point of view

'Frequentite' is the most suitable insulating material for all high frequency applications. Seventeen years ago we introduced the first British-made low-loss ceramic, and consultation with us before finalising the design of new components is a wise precaution.

STEATITE & PORCELAIN PRODUCTS LTD.

Head Office: Stourport-on-Severn, Worcestershire. Telephone: Stourport 111. Telegrams: Steatain, Stourport

S.P.67

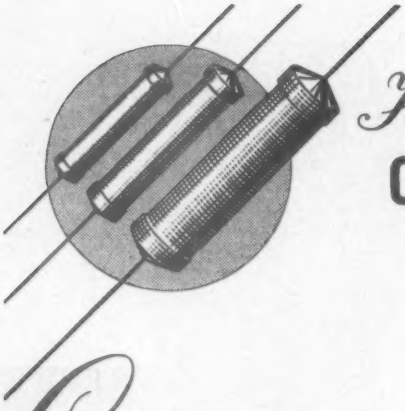

High Stability
CARBON RESISTORS

ENGINEERS will be interested in the improved stability offered by Painton Resistors, e.g., Type Approval of the ½ and ¼ watt Painton Types has recently been extended to ohmic values greatly exceeding those currently shown in the "Blue Book." Full details on request.

BUYERS will be interested in competitive prices and rapid and reliable delivery. Bulk supplies of most types are available at short notice. Quotations will be gladly supplied on request.

Control by
PAINTON

PAINTON & CO LTD · KINGSTHORPE · NORTHAMPTON · *TELEPHONE 2820*

BAKERS
'Selhurst'
RADIO

PIONEERS OF MOVING COIL SPEAKERS SINCE 1925

NEW "HIGH FLUX" 1951 MODELS

HIGH FIDELITY
SPEAKERS

The World Famous 12" triple cone.
12" Single Cone Model.
18" "Duplex".

Write for illustrated list and technical details of SPEAKERS, TUNERS and AMPLIFIERS.

BAKERS 'SELHURST' RADIO
Dingwall Road, Croydon
Telephone: CROydon 2271/2

3 WAY PICK-UP FOR STANDARD AND LONG PLAYING RECORDS

Goldring introduces Pickup 150, incorporating the first British **Magnetic** Cartridge. Cartridge 150X available separately. The movement of this Cartridge is of balanced armature construction, and combines high output with wide frequency range and exceptionally low tracing distortion. Needle armature is easily replaceable by user.

Data	78 r.p.m	45 and 33⅓ r.p.m.
Armature resonance	16 kc/s	9 kc/s
Output	70 mV	Equivalent to 150 mV on 78 r.p.m.
Tracking weight ...	15-20 grms.	7 grms.
Load	30 kΩ	30 kΩ
Stylus	.003 code blue	.001 code yellow

Comprehensive information service on circuitry available to users

Write for full technical information to :—

ERWIN SCHARF
49-51a, DE BEAUVOIR ROAD, N.1
Telephone : CLissold 3434

Osram VALVES

Pointers for Designers

AND CONSTRUCTORS

TELEVISION SOUND RECEPTION

One of the main requirements of a television sound receiver is a high attenuation of the adjacent vision carrier frequencies. This attenuation should not be less than 30—40 db and is normally effected by the use of several tuned circuits used in conjunction with RF pentodes having high mutual conductance which, however, usually have an input resistance of under 10 k Ω.

It is apparent that the required attenuation may be achieved with fewer tuned circuits if the associated valves have a higher input resistance - resulting in less damping of the circuits. The Osram W 77 meets this requirement, having approximately three to four times the input resistance of the normal RF Pentode. This is only one of many applications of the W 77 miniature valve.

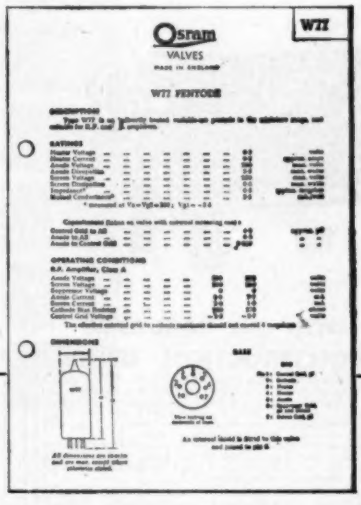

Write for a copy of the data sheet on the W77 to: Osram Valve and Electronics Dept., Magnet House, Kingsway, W.C.2.

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY. W.C.2.

Announcement!

We are pleased to announce the **SIMPHONIC IA,** an addition to our range of portable recorders. The new model has an impressive specification and offers long playing times coupled with ample output power and high quality. Features include :—

- 3¾ and 7½ ins/sec. with **CONSTANT SPEED CAPSTAN**
- **TWIN TRACKS** ● Finger-tip **MONO-MASTER** control
- **PUSH-PULL** output — 8 watts ● **RESPONSE** 50-8000 c/s
- Independent **BASS** and **TREBLE** controls

The well-known SIMPHONIC Model 2B, is still available for all applications where simplicity, reliability and moderate cost are important considerations.

MODEL 2B

Simon
SOUND SERVICE

Recorder House, 48-50 George Street, Portman Square, London, W.1, England

Telephone : **Welbeck 2371 (4 lines)** *Telegrams :* **Simsale, Wesdo, London,** *Cables :* **Simsale, London**

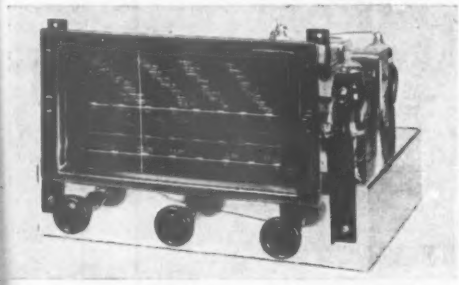

BUILD WITH OUR HANDSOME

HOME CONSTRUCTION UNITS !

YOU can build this magnificent SUPERHET!
Using the **new and improved** unique point-to-point Construction Sheets for our famous 5 v. A.C. Super (with the latest 30 Tuning Unit) **anyone** can, for an evening's entertaining construction, complete a receiver (without ANY test gear) whose selectivity, range and overall performance will at least equal that of commercially built receivers at double the cost! Build your own and save!
As our delighted friends already know the secret lies in using our pre-aligned **30 TUNING UNIT** comprising the famous 3 band 30 Coil pack. "**KM**" I.F.T.s, new 8in. × 6in. 3-colour *Dial* and J.B. 2-gang—READY ALIGNED MATCHED and SEALED on Long, Medium and Short bands!
NOTE for Connoisseurs: Our 40 Feeder (with R.F. Stage) using model 40 Tuning Unit with SU-PI switching for local stations (and Gram.) with our 10w. push-pull Quality Amplifier and variable negative feedback is the TOPS! (Ideal with Williamson.) We supply point-to-point construction sheets for these also. Remember—**no test gear required!**

" Letters of praise received daily from beginners and experts' — — — — — P.J.M., of S.E.14, states: " . . . it does all you claim . . . I had the surprise of my life when it went perfectly first time—it is the best set I've ever heard." **For constructional details,** illustrations, circuit diagrams with complete parts lists and prices, data, etc., send 2/- NOW FOR LATEST EDITION of our " Home Constructor's Handbook."

RODING LABORATORIES
(OF ILFORD)

MAIL ONLY to 694, Lea Bridge Road, Leyton, E.10.

made to measure . . .

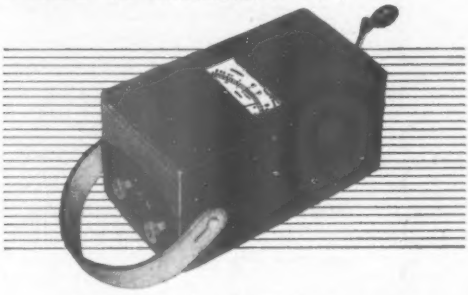

The man who knows exactly the state of his insulation at any time—is wise.

But one who uses a "Record" Insulation Test Set is wisest. It is made to measure—ACCURATELY, by those who were pioneers in this field and who have kept ahead.

RECORD MAKERS OF MANY OTHER FINE INSTRUMENTS.

THE RECORD ELECTRICAL CO LTD

BROADHEATH · ALTRINCHAM · CHESHIRE

Phone : Altrincham 3221/2/3 *Cables and Grams : " Circsale " Altrincham*
London Office : 28 Victoria Street, London, S.W.1 *Phone: Abbey 5148 & 2783*
Grams: " Circsale " Sowest, London. *Cables: " Circsale" London*

How are YOU fixed?

On their Console Television Set, Ultra Electric Ltd. save labour and material costs on fixings by using 44 Spire Speed Nuts. Spire is the name. Speed is the reason. Spire Speed Nuts make faster, easier assembly — and that means saving. But not saving at the expense of performance. These self-locking fasteners are functionally better than the old methods they replace. Each fastener saves 50-75% on weight of material used.

SFP Spire Speed Fixes. 6 secure moulded tube escutcheon to cabinet, 3 secure moulded side control to cabinet.

SCA Spire Speed Clips secure 5 control knobs to their spindles.

SNO Spire Speed Nuts secure chassis to cabinet.

SNU Spire Speed Nuts retain the picture shift adjustment.

SNB Spire Speed Clips. 6 used on underside of chassis and back panel to secure tubular condensers.

20 SNU Spire Speed Nuts used in general assembly of chassis, for coilplate support and for fixing line and output transformers.

Spire SPEED NUTS *fastest things in fastenings*

Enquiries to:
SIMMONDS AEROCESSORIES LTD., Byron House, 7-8-9 St. James's Street, London, S.W.1.
Head Office & Works: Treforest, Glamorgan. Also Birmingham, Stockholm & Melbourne.
CSD 326

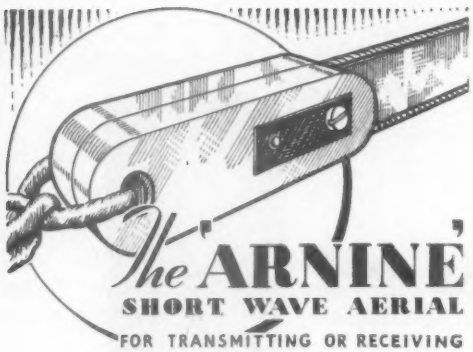

The 'ARNINE'

SHORT WAVE AERIAL

FOR TRANSMITTING OR RECEIVING

Designed to give maximum signal input on short wave reception combined with considerable interference reduction.

The "Arnine" (Regd.) is in the form of a folded dipole and permits wide band reception with a constant input impedance of 300 ohms. This value is correctly matched to the down lead which is of the same material as the aerial span. The connections between the span and down lead are permanently sealed in special moulded polythene insulator, the whole being rendered completely weatherproof.

SPAN CALIBRATED FOR EASY TUNING

For easy adjustment to any required length, the Polythene web of the aerial span is calibrated for the 10, 20 and 40 metre amateur bands, and for the 11, 13, 16, 19, 25 and 31 metre broadcast bands.



MODEL FDA 20

with two aerial spans of 16' 6" each, and 75ft. down lead (suitable for frequencies of 14 mc/s upwards).

LIST PRICE
£3 - 2 - 6

MODEL FDA 40

with two aerial spans of 32' 6" each, and 90 ft. down lead (suitable for frequencies of 7 mc/s upwards.

LIST PRICE
£3 - 12 - 6

CABLE DATA

CAPACITY - - 4.6 picafarads per foot

POWER CAPACITY - (at 7 mc/s) 1.9 kw.
- (at 14 mc/s) .9 kw.

ATTENUATION-(at 7mc/s) .35 db per 100 ft.
-(at 14 mc/s) .7 db per 100 ft.

ANTIFERENCE
LIMITED
67 BRYANSTON STREET · LONDON · W.1

COIL WINDING MACHINERY



We invite your enquiries for the Type A1/1 automatic machine, as illustrated. Also for the Type H/1 hand coil winder and Type AW/1 Armature Winding Head.

KOLECTRIC LTD
73 UXBRIDGE RD., EALING, LONDON, W.5.
Ealing 9096.

here's your

★ really comprehensive range of **Engraved Control Knobs!**

Beautifully engraved Control Knobs in either Walnut or Ivory. Each knob is engraved in GOLD which is given an adhesive base, thus rendering erasion impossible. The range of inscriptions is the most comprehensive on the market—the markings being decided upon only after extensive enquiries throughout the trade. The requirements of every RADIO, TELEVISION and AMPLIFIER enthusiast are catered for. Inscriptions obtainable are BRILLIANCE, CONTRAST, FOCUS, BRILLIANCE/ON-OFF, VOLUME, VOL/ON-OFF, TREBLE, BASS, TUNING, TONE, RADIO-GRAM, WAVECHANGE, ON-OFF. Packed individually in transparent envelopes.

Retail Price **1/6** each from your usual Dealer.

Distributors:
UNCLES, BLISS & CO., LTD.
139, Cherry Orchard Road, East Croydon, Surrey

THE *New* WINDSOR *Television* WOBBULATOR

MODEL 260A

MODEL 260A TELEVISION WOBBULATOR · MODEL 260 A. TELEVISION WOBBULATOR MODEL

The first self-contained electronic instrument providing visual alignment facilities for television receivers. Simple, compact and efficient—its use will save many hours of valuable time in the service department.

FEATURES

- ★ **CARRIER FREQUENCY 5-70 Mc/s. 10-140 Mc/s** *(on 2nd harmonic).*
- ★ **BANDWIDTH 0-5 Mc/s total. 0-10 Mc/s** *(on 2nd harmonic).*
- ★ **SWEEP FREQUENCY. 50 c.p.s. sinusoidal, return trace blacked out automatically.**
- ★ **OUTPUT. Adjustable from 0-10 mV approx. Fixed and variable attenuators are fitted. Output impedance 75 ohms.**

EARLY DELIVERY.

Please write for further details and information on other WINDSOR and TAYLOR products.

MODEL 260A TELEVISION WOBBULATOR · MODEL 260 A.

WINDSOR *and* **TAYLOR**
Best for TEST EQUIPMENT

TAYLOR ELECTRICAL INSTRUMENTS LTD.
419/424 MONTROSE AVENUE, SLOUGH, BUCKS., ENGLAND

Tel. SLOUGH 21381 (4 lines)
Grams. & Cables: TAYLINS, SLOUGH

Recognised as the Most Reliable Valveholders

McMURDO Moulded Valveholders

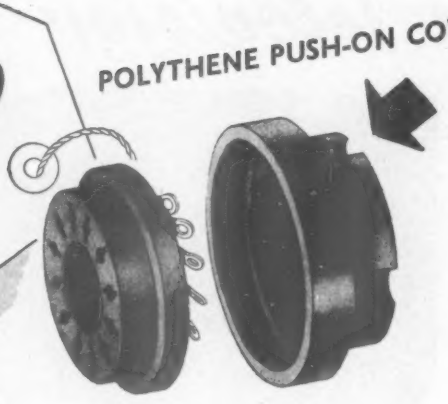

B12A—Duodecal
FOR CATHODE RAY TUBES

Ref. No. B.12/U.1—moulded in Phenol-Formaldehyde
" " B.12/U— " " " " " with Polythene Cover

THE McMURDO INSTRUMENT COMPANY LTD., VICTORIA WORKS, ASHTEAD, SURREY. ASHTEAD 3401

THE TRIMMER KIT

which no Amateur or Professional Radio or Television Engineer can afford to be without.

Contains
★ 1 End Trimmer
★ 1 Side Trimmer
★ 1 Yaxley Switch Contact Adjuster
★ 1 Low Capacity Trimmer
★ 1 Screwdriver
★ 1 Set of Feeler Gauges
★ 1 Set of six Box Spanners from 1 to 6 B.A.
★ 1 Set of our Spanners from 0 to 8 B.A.

In durable black crackle finish metal case

Order from:
J. & S. NEWMAN Ltd. 100 Hampstead Road, N.W.1. *Tel. Euston 5176.*

B.P.L. TEST SETS

NOW AVAILABLE

AT NET PRICES

B.P.L. UNIVERSAL TEST SET
£5 - 18 - 6

B.P.L. SUPER RANGER 1,000 Ω/v.
£13 - 10 - 0

B.P.L. SUPER RANGER 20,000 Ωv.
£15 - 10 - 0

Prices include postage and packing and are applicable to Home Market only.

Send your order direct to:
BRITISH PHYSICAL LABORATORIES
HOUSEBOAT WORKS, RADLETT, HERTS
Tel.: Radlett 5674-5-6

FERRANTI TRANSFORMERS

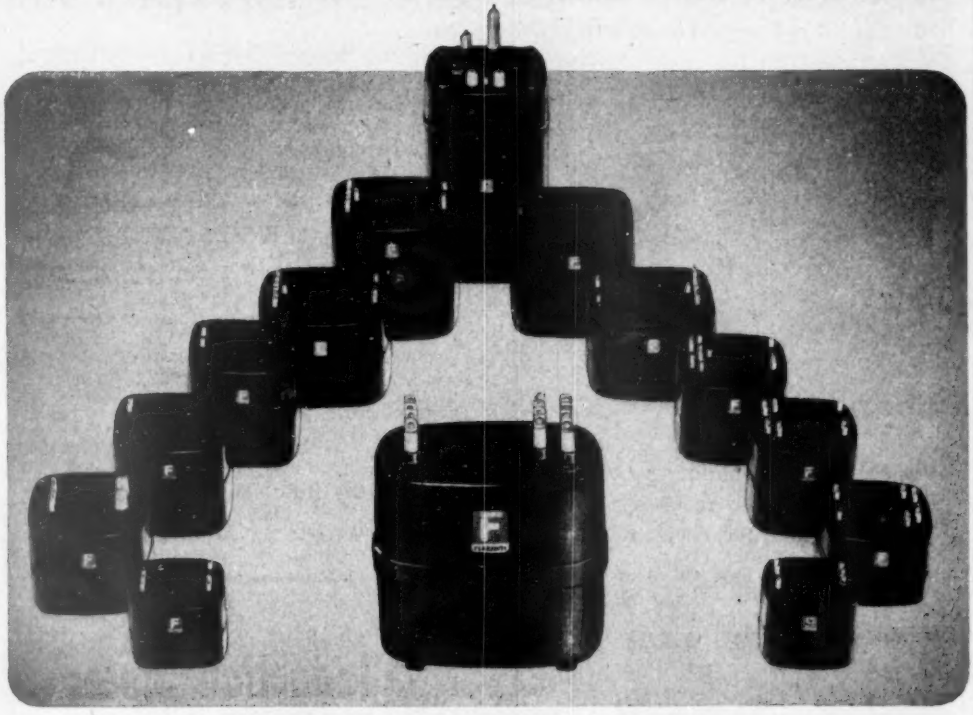

'H' series hermetically sealed
'C' core transformers and chokes

Designed to conform to Specification R.C.S. 214 and R.C.L. 215. Fully approved by the Admiralty, War Office and Air Ministry for use in Service Equipment.

Designed to meet Customer's particular requirements. For quotations and further information please write directly to:—

FERRANTI

FERRANTI LTD · TECHNICAL SALES DEPARTMENT · FERRY ROAD · EDINBURGH, 5

Two *major* Additions

to our range of receiver chassis suitable for radio-gram installations

ACE U531

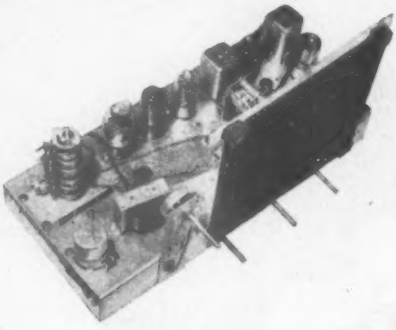

5-valve, 3 waveband, A.C./D.C. mains superhet receiver with matched 10″ speaker

Price **£14**, plus £6.4.6 tax

MAJOR A531



5-valve, 3 waveband, A.C. mains receiver with matched 10″ speaker

Price **£13**, plus £5.15.6 tax

MAJOR DISTRIBUTORS

7 CAVENDISH PLACE, LONDON, W.1

Telephone: WHLesden 6713

— towards perfection —

93·8 Mc/s *WROTHAM* A.M.

V.H.F. transmission offers S.E. England quality, interference-free reception hitherto unknown.

We support this project and offer our A.M. tuner unit as a compliment to this new transmitter, affording enjoyment of listening, unobtainable on either medium or long wave bands.

- Simple to connect.
- Can be switched as alternative to existing tuner,
- or into radio socket of amplifier for record reproduction.
- Power derived from main amplifier.
- NO whistles! NO overlapping! NO jamming!

Price complete **£6.10.0** Plus P. Tax **£1.17.8**

AERIALS :—Wall mounting di-pole - £2.2.0
H array with pole, chimney lashings, etc. - - - - £6.6.0

THE LOWTHER MANUFACTURING CO.
(The Laboratory Production unit)
LOWTHER HOUSE, ST. MARK'S ROAD, BROMLEY, KENT. Phone RAV. 5225

BSR Induction Motors..

FOUR POLE MOTOR FP. 10

A precision engineered well balanced motor, designed to give constant, trouble free performance indefinitely. This motor is used extensively in mag. wire and tape recorders, and gramophone units now manufactured.

Note these features :—Fully protected • Dual voltage range • Negligible external magnetic field • Oil impregnated self aligning bearings • Speed constancy and silent running.



Speed (light) 1400 r.p.m. Torque 3 inch ozs. Weight 1¼ lbs.

TWO POLE MOTORS SR1 & SR2.

A rugged and highly efficient motor that will stand heavy overloads, and for intermittent ratings is capable of giving up to twice the rated power. Used extensively in many motion displays, fans and gramophones now manufactured. SR1 MODEL; Speed (light) 2750 r.p.m. Torque 3.0 inch ozs.—Weight 2.31 lbs. SR2 MODEL; Speed (light) 2750 r.p.m. Torque 2.0 inch ozs.—Weight 1.7 lbs.

. . Leaders in their field

Birmingham Sound Reproducers Ltd., Old Hill, Staffs. Tel. Cradley Heath 6212/3

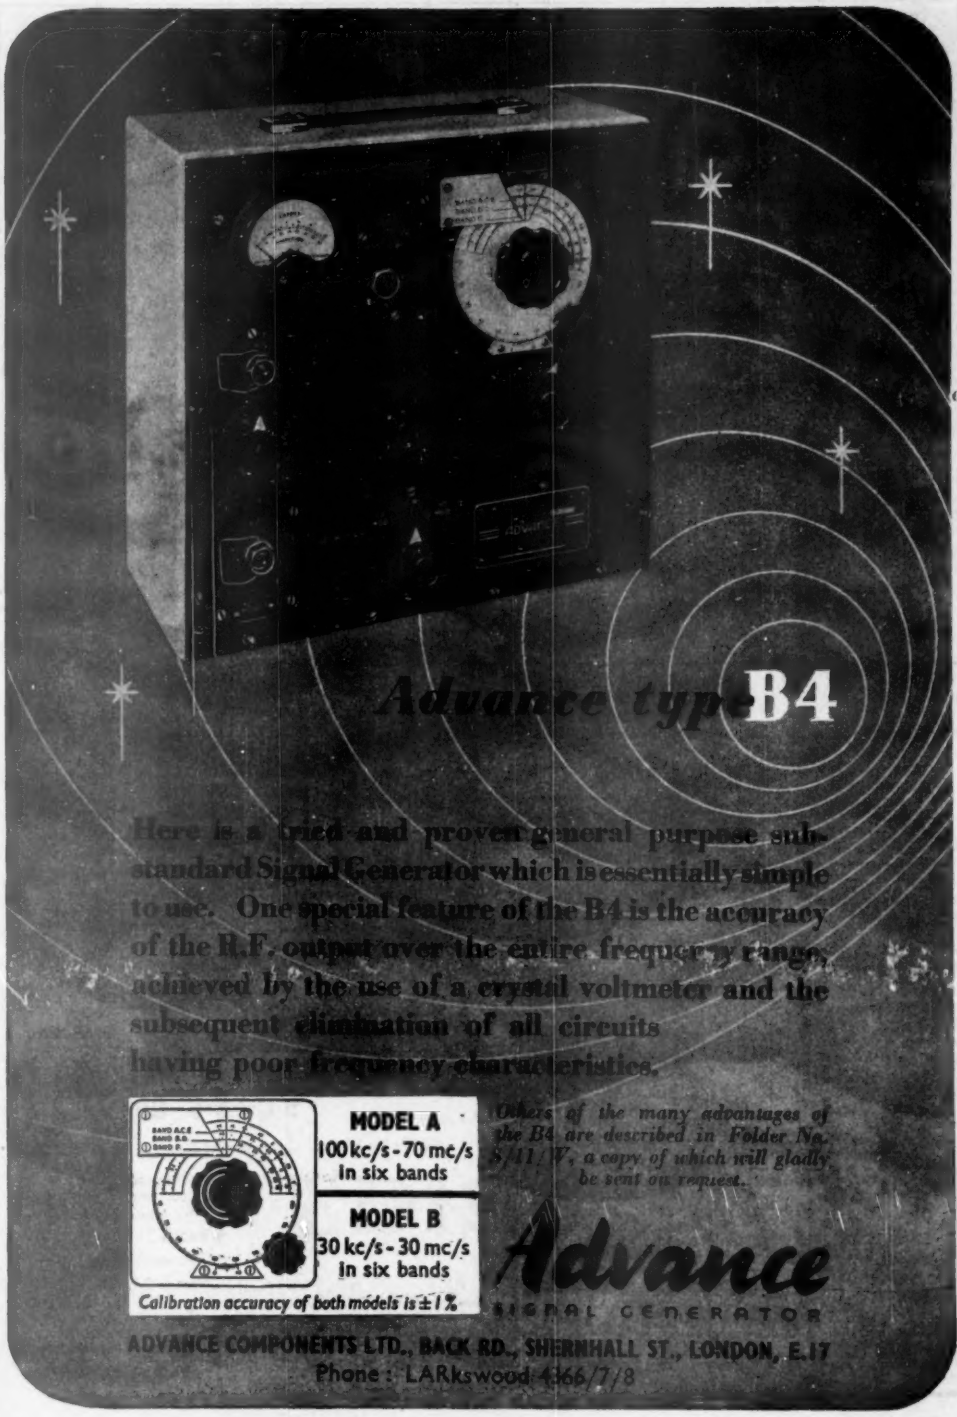
Advance type B4
Here is a tried and proven general purpose sub-standard Signal Generator which is essentially simple to use. One special feature of the B4 is the accuracy of the R.F. output over the entire frequency range, achieved by the use of a crystal voltmeter and the subsequent elimination of all circuits having poor frequency characteristics.
MODEL A
100 kc/s - 70 mc/s
in six bands
MODEL B
30 kc/s - 30 mc/s
in six bands
Calibration accuracy of both models is ± 1%
Others of the many advantages of the B4 are described in Folder No. S/11/V, a copy of which will gladly be sent on request.
Advance
SIGNAL GENERATOR
ADVANCE COMPONENTS LTD., BACK RD., SHERNHALL ST., LONDON, E.17
Phone: LARkswood 4366/7/8

YOU CAN MAGNETICALLY RECORD
using your Gramophone Motor as a Drive

Necessary parts, also usable later for a more ambitious job, plans available, 1 Spool Diamond Magnetic Recording Tape and 1 take-up spool, 2 Corner Brackets, 1 Roller, 1 Record-playback Head Kit, 1 Friction Clutch, 1 Dual-purpose Supersonic Oscillator and Two-stage Preamplifier and your Radio Chassis. Set of parts £7.15.0 or items supplied separately.

Also Constructional Data for Wire and Tape Recorders 5s.

PARK RADIO OF MANOR PARK, 676/8, 783 Romford Road, London, E.12

The BIJOU

This ever popular Wharfedale speaker combines attractive appearance, handy size and moderate price. Fitted with the Standard 8" Unit. Handles 3 watts.

Hand polished Walnut and fitted with volume control and 5' of P.V.C. flex. Weight 5¾ lbs. Size: 12½" x 10" x 5½".



AN EVER POPULAR SPEAKER FROM

Wharfedale 85/-

WIRELESS WORKS

BRADFORD RD., IDLE, BRADFORD, YORKS

Telephone: IDLE 461

ALL the A.C. power you require from your D.C supply

with a

Valradio

D·C·/A·C· CONVERTER

Models for Electric Gramophones from £8, plus 10%

Models for
- Radio-grams and Autochange Radio-grams (inc. 3-speed motors)
- Radios
- Televisions, etc., *from £10.15.0, plus 10%*

Input, 6, 12, 24, 32, 50, 110 or 200/250V. D.C.
Output 230V. 50 or 60 c/s

Valradio

Descriptive literature W.W. 4 from the manufacturers:
57 FORTESS ROAD, LONDON, N.W.5
Telephone: GULliver 5165

Overseas Enquiries to nearest E.M.I. Organisation Depot

Constant output—
DOWN TO 1·4 C.P.S.

The specially designed resistance capacity circuit of the Ediswan Low Frequency Oscillator type R666 ensures constant output and good waveform even with frequencies as low as 1·4 c.p.s. For testing, calibration, amplifier set-up and in all cases where a dependable low frequency standard is required this instrument is ideal. Supplied in unit form for standard rack mounting. Special stands for bench use (as illustrated) are available.

PRICE

Oscillator . . . £75.0.0 Stands (Per Set) . . . £1.10.0

EDISWAN

THE EDISON SWAN ELECTRIC CO., LTD., 155 Charing Cross Road, London, W.C.2

Member of the A.E.I. Group of Companies

SP68

The New MAGNAVISTA Filtachromatic Television Lens

DON'T TURN IT UP!

For daylight viewing with the Magnavista it is not necessary to turn up the brilliance. The filter *inside* the lens saves overworking the tube.

Larger, clearer pictures seen in daylight; this precision lens turns every television set into a "de-luxe model." Only with Magnavista can you really make the *most* of television.

There is a Magnavista model specially computed for every set.

PRICES

There are over 18 different Magnavista models at prices ranging from £4/14/6.

a product of

METROPEX LTD

42a DENMARK HILL, LONDON, S.E.5.

Delivery from STOCK!

Scophony BAIRD

Magnetic Tape

HOME RECORDER

- Complete with mike and one reel of tape.
- Inputs for mike, gram or radio.
- 10 watts push/pull output. Provision for ext. speaker. 30 mins. playing time.
- Rexine covered case with lid and carrying handle.



PRICE from MARCH 5th

£58·5·6 NO P.T.

Extra reels of tape £1-6-0

THREE SPEEDS

33⅓-45-78 r.p.m.

BSR M U-14 gram motors. Instant selection of speed required. No belts are used. A.C. only 100-250v 50c/s.

Price £7·3·4 Inc. P.T.

DECCA

HI-FI crystal pick-up with TURNOVER head for micro-groove or standard records. Twin sapphires.

Price £3·19·4 Inc. P.T.

Frith RADIOCRAFT Ltd

60-71 CHURCH GATE LEICESTER PHONE 58971

CELESTION

The Foremost Name in Sound Reproduction

MODEL P44.

- Overall Diameter 12 3/16"
- Voice Coil Impedance ohms 3.0
- Magnet Pole Diameter 1½"
- Flux Density (Gauss) 10,000
- Total Gap Flux (Maxwells) 60,000
- Peak Power Capacity 10W

The General Public should please order through their Local Dealers.

Manufacturers are invited to write for details of the full range of Celestion speakers.

CELESTION, SUMMER ROAD THAMES DITTON, SURREY

Telephone: EMBERBROOK 3402-5

CINTEL

The most comprehensive range of Cells in the world

TYPE VTA
FLAT
TRANSPARENT
CATHODE

'CINTEL' PHOTO-ELECTRIC CELLS

are manufactured with three different types of cathode surface as follows:—

TYPE 'A' — Antimony-Caesium (British Patent No. 522,752, 1938) sensitive to daylight and blue light.

TYPE 'B' — Bismuth etc.-Caesium, sensitivity similar to that of the human eye.

TYPE 'S' — Silver-Oxygen-Caesium, sensitive to red-infra-red light.

There are over seventy different types covering every known application, and included in this range are:—

★Push-Pull types for double sound tracks. ★Special cells for dye image sound tracks. ★Cells of high insulation, linearity, and stability for accurate photometric work. ★Cells for use in the ultra violet region of the spectrum. ★Multiplier cells. ★Transparent cathode cells &c.

For further information, please write to:—



TYPE VS51
B8G BASE

TYPE VS50
B7G BASE

CINEMA-TELEVISION LIMITED

A Company within the J. Arthur Rank Organisation

FOREMOST IN THE MANUFACTURE OF

• Counters & Chronometers • Metal Detectors • Oscilloscopes • Photo-Electric Cells • Cathode Ray Tubes • Geiger-Muller Tubes • Electronic Instruments

WORSLEY BRIDGE ROAD · LONDON · S·E·26

Telephone: HITher Green 4600

SALES AND SERVICING AGENTS:

F. C. ROBINSON & PARTNERS LTD
287 Deansgate, Manchester 3

ATKINS, ROBERTSON & WHITEFORD LTD
100 Torrisdale Street, Glasgow S.2

H. HAWNT & CO. LTD
59 Moor St., Birmingham, 4

CINTEL

REGISTERED TRADE MARK

THE NEW RECORDING STANDARD

Servograph

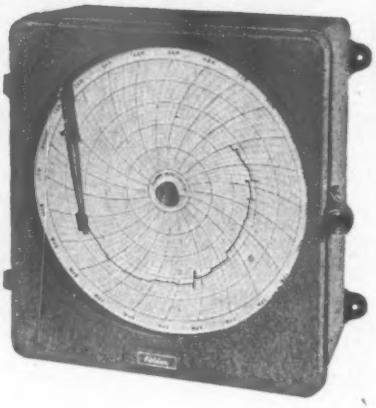

SERVOGRAPH is the *New* Recorder using the unique Fielden principle of instrument actuation which is making "impossible" measurements practicable and advancing others. Operable from very light current sources, SERVOGRAPH may be direct-connected to any existing apparatus for measuring CO_2, pH or any physical quantity expressible as electrical energy. Please write for full details to Fielden (Electronics) Ltd. Paston Road, Wythenshawe, Manchester or 21 Buckingham Street, Strand, London, W.C.2.

Associates: Fielden Electronics (Australia) Pty. Ltd., Melbourne, Australia; Fielden Instrument Corporation, Philadelphia, U.S.A.

Fielden INSTRUMENTATION

There is a FIELDEN INSTRUMENT for most physical measurements
Hopwood

All these high-quality features . . . yet it retails at only £5/12/6!

- Non-hygroscopic diaphragm
- Former-less speech-coil
- Good transient response
- Smooth response curve
- High amplifier gain without feed-back
- Stable operation
- Great sensitivity
- High output voltage

The high flux nickel aluminium magnet and diaphragm assembly is housed in a spring suspended die cast case. Microphone input transformers and three types of stands, folding, table top and heavy-base, to suit this microphone, are also available.

Type M.C.R. Moving Coil
GRAMPIAN MICROPHONE

Get full details without delay from:

GRAMPIAN REPRODUCERS LTD
9, HANWORTH TRADING ESTATE, FELTHAM, MIDDX.
Phone: Feltham 2657 'Grams: Reamp, Feltham

"Cyldon" Variable CAPACITORS

From MINIATURE TRIMMERS to HIGH VOLTAGE TRANSMITTER CAPACITORS

Here are shown just two examples from the comprehensive "Cyldon" range. For precision, stability, and long life, "Cyldon" superiority is recognised by all designers and users of electronic equipment.

No. 26. A new Mica Compression Trimmer

For use in Television circuits. High stability with constant, wide, capacity swings and long life at high voltage. Blade resilience not affected by continual setting. Low loss Rockite base and best Mica di-electric give very efficient Power Factor. Location method prevents flash-over from blade movement. Capacities up to 1,000 pF at 1,500 or 5,000 v. D.C. test and up to 2,000 pF for 350 v. D.C. test. 1.225 diam., 1⅛in. high.

No. 18/5. Air Di-electric Trimmer



Of high stability and excellent Power Factor. High but smooth operating torque. Metal parts silver plated. First grade ceramic base. Single-hole fixing. Split stator and locking versions also available. Max. capacities from 10-30 pF. Base size 1 × ⅝in.

● Enquiries invited from Equipment Manufacturers and Wholesale Trade only.

Full details of the complete "Cyldon" range and list of Agents for Home and Overseas available from the manufacturers:

SYDNEY S. BIRD & SONS, LTD.
CAMBRIDGE ARTERIAL ROAD, ENFIELD, MIDDX.
Phone: Enfield 2071/2 Grams: Cyldonity, Enfield

NO INCREASE

LONDON CENTRAL RADIO STORES

IN OUR PRICES

Government Surplus – Immediate Delivery from Stock

Unique Offer !

G.E.C. (Reconditioned) OVERSEAS RECEIVER

5-WAVEBANDS—10-2,000 METRES

Ex-B.B.C. For A.C. mains only, 100-250v. Twin 8" P.M. Speakers, push-pull output, separate Bass and Treble controls, full vision tuning scale etc. Valve line-up :—R.F., F.C., 2, IFs, 2, DDT, 2 Output Tetrodes and Rectifier. Housed in Walnut Cabinet 23½" x 19" high x 12" deep. Thoroughly overhauled and Guaranteed.

£27.10.0

Unique Offer !

For Callers only — *Limited Number*

WALKIE - TALKIE (Transmitter-Receiver) Type 48 (Mk. 1*). Brand New Ex-U.S. Army.



Frequency coverage 6-9 Mc/s. Comprises transmitter/receiver with 10 valves and one 1-Mc/s crystal, in metal case with waterproof cover, sectional rod aerial in satchel. Spare valve case, complete with 10 spare valves, key assembly, hand microphone, two headsets, one hand generator (10 watts) with tripod as illustrated in April issue, two battery boxes, all essential connecting cables. The complete equipment together with comprehensive instruction manual. Price **£24.10.0** (Inland only).

3 Only
HALLICRAFTER SKY CHAMPION RECEIVERS
Model S20R. 50 Mc/s-500 metres.
9 valves, built-in speaker, 'phone output. An excellent bargain. Thoroughly overhauled and guaranteed. **£29.10.0**
For callers only.

VIBRATORS, 2-VOLT, Type R70C. 7-pin self-rectifying. Output 200 v. at 60 mA. Made by Electronic Laboratories Inc., **7/6.**

6-VOLT, Type 560. 6-pin self-rectifying, **7/6.**

MALLORY, Type 650, 6-volt 4-pin American base, **7/6.**

MALLORY, Type GE25C. 12-volt, 4-pin, American base, **7/6.**

BUBBLE SEXTANTS MK. 9A. Equal to new. Complete with 6 extra bulbs, **37/6.** Ditto, Mk. 9, **27/6.**

NEW NIFE ACCUMULATORS. 2.5 v. 2½ amp./hours for 3 hours. Size 3 × 4¼ × 1¼in. (Flat) **6/6.** Post and packing 9d.

MAP READING TORCH. Powerful magnifying lens, 3in. diam. In bakelite case. Fitted with dimmer switch. Takes two U2 cells. With bulb, less batteries, **22/6.**

WESTINGHOUSE METAL RECTIFIERS. Type H.T.10, 33 fins. Size 6 × 2½ × 2¼in. Carr. and packing 1/6. **15/-**

An Exceptional Offer !
CHEVROLET CAR RADIO RECEIVERS.
9 valves, 5 wavebands, 6 volt. This product of General Motors is exceptional value. Size 14in. wide × 9½in. deep × 9in. high, graduating to 5½in. at back. Carr. and packing 7/6. **£18.10.0**

BRIDGE MEGGERS (Ex-Admiralty). Made by Evershed and Vignoles. 250 v. Range : Megger 0-50 ohms, Bridge .001-100,000 ohms, shown in four digit windows, 10/1 and 100/1 multiplier and divider. Size 9×8×6in. In leather carrying case. **£16/10/0,** carr. paid.

UNISELECTOR SWITCHES.
4-bank, full-wipers **37/6**
6-bank, half-wipers **27/6**
3-bank, full wipers **19/6**
Have various applications, including automatic tuning circuit selection, etc. Operates on 25-50 v.

RECTIFIERS 12 v. 3a. 14/6 Carr. 1/-.

PHOTO-ELECTRIC CELLS, Type G516. These cells are the gas-filled type with caesium Cathode. Made by Cintel. Minimum sensitivity 100μA/lumen working volts 100 D.C. or peak A.C. Projected cathode area 16 sq. cm. Suitable for 16 mm. Home Cinema Talkie equipment, Safety Devices, Colour and Photo. Matching, Burglar Alarms, Automatic Counting, Door Opening, etc. Brand new in original cartons **42/6**

TELESONIC 4-VALVE BATTERY PORTABLE (Fixed Range). Type YA4015. Includes



three XH and one XP Hivac midget valves. Can be adapted for Deaf Aid or Midget Receiver, but we do not supply information on this point. Batteries required 3 v. L.T., 97 v. H.T. In metal case, size 5½ × 7 × 2in. Weight 4lb., less batteries. Carr. and packing 2/6. **45/-**
(Illustration shows chassis partly removed from cabinet.)

A Fine Opportunity!
New INERT CELL ACCUMULATORS.
Everlasting. No acid or charging required. Suitable for battery sets, electric bells, etc. 1.5 v. **2/10** or **7/6** for three. Post free.

VCR140 CATHODE RAY TUBES
12in. blue screen, magnetic deflection, magnetic focus, maximum 6 Kv., heater 4 v., international octal connections. Carr. and packing 5/-. **£4.10.0**

H.M.V. RADIO AND TELEVISION CONSOLE.
4 waveband 6-valve Radio, 12in. Tube Television with indirect viewing (mirror in lid), handsome walnut cabinet of super quality, size 39in. high × 19in. deep × 36in. wide. In perfect working order. Owing to size and weight these are **for callers only.** Price **£55.**

WALKIE - TALKIE (Transmitter and Receiver) CHASSIS, type 38 Mk. II.



Range 7.4-9 Mc/s Requires 3 v. L.T., 120/150 v. H.T. In perfect working order. Complete with four ARP12, one ATP4 valves, one pair throat mikes pair headphones and aerial. In metal case. Free wiring diagram. Batteries not supplied.
Carr. & packing 2/6. **£3/6/6.**

See previous issues for other outstanding bargains.

PHILCO 5-VALVE SUPERHET RECEIVERS (Reconditioned)
A.C. or A.C./D.C., 200-250 v. Built-in 8in. mains-energised speaker. In walnut cabinets (soiled) size approx. 19 x 13 x 10in. Every set has been overhauled at works.
2-waveband (Med. and Long) £4.10.0
3-waveband (Short, M. & L.) £6.10.0
Plus Carriage and Packing, 7/6 each.
HAVING PURCHASED A LARGE CONSIGNMENT WE CAN STILL SUPPLY THESE

Please Note : All carriage charges relate to the British Isles only • We do not issue lists or catalogues

LONDON CENTRAL RADIO STORES, 23 LISLE ST. (GERrard 2969) LONDON, W.C.2
Closed Thursday 1 p.m. Open all day Saturday and weekdays 9 a.m.—6 p.m.

for faster production

Superspeed ACTIVATED

ROSIN CORED SOLDER WIRE

On 7 lb., 5 lb. and 1 lb. reels and in Service packs.

Complies with M.A.P. Specification D.T.D.599 and General Post Office Specification M.44/C.

FREE Enthoven Publications filled with valuable technical information on Solder and Fluxes.

H. J. ENTHOVEN & SONS LTD.

Solder Manufacturers

Head Office: 89 UPPER THAMES ST., LONDON, E.C.4 *Tel.: Mansion House 4533*
Grams: Enthoven, Phone, London.

Works:
CROYDON, ROTHERHITHE & DERBYSHIRE

J. H. BRIERLEY LTD.

Due to a combination of circumstances compelling us at the end of last year to move into our new factory at Kirkby before it had been possible to complete it, there has been a major disorganisation, not only of our routine work but also the total loss of 4 months' production.

To those who have waited much longer than was expected for their orders, repairs or even in the matter of correspondence, we would tender our apologies and explain that all matters have been most carefully filed and no requirement—however large, small or long-standing—will be overlooked.

At the time of writing this announcement, the situation is well in hand and by the time it appears we expect that the position will be substantially normal.

J. H. BRIERLEY (Gramophones & Recordings) LTD.
KIRKBY TRADING ESTATE,
LIVERPOOL.

Precision **ELECTRICAL MEASURING INSTRUMENTS** *by* **SIFAM**
ENGLAND



This Bench type portable instrument is used in many laboratories where consistent accuracy is demanded. Single or multi ranges for D.C. or A.C., calibrated to customers' requirements. Sizes 3½", 4" or 6" instruments. Accuracy B.S. First Grade.

The 4½" square type instrument is our new design embodying all the latest improvements. It has a large open scale so much desired for modern switchboard practice. The case is of black bakelite, and the instrument can be supplied in all ranges for D.C. It can be also fitted with a metal rectifier for A.C. working. Accuracy B.S. First Grade.



Prices on application.

PROMPT DELIVERY AND TWELVE MONTHS' GUARANTEE

SIFAM ELECTRICAL INSTRUMENT CO., LTD.,
LEIGH COURT - TORQUAY - *Telephone: TORQUAY 4547/8*

19263

Britain's Plastics BRITISH PLASTICS EXHIBITION *Industry on Show*

BRITISH PLASTICS EXHIBITION

AND CONVENTION

OLYMPIA, 6-16th JUNE

10 a.m. to 8 p.m. **ADMISSION 2s.6d.**

See what the latest plastics can mean in YOUR business . . .

The first Exhibition and Convention of Britain's entire plastics industry will be held during the Festival of Britain. Staged in collaboration with the producers of raw materials, manufacturers of plastics materials and equipment, moulders and fabricators, it will be the finest display of plastics products, processes and plant ever staged under one roof. At the Convention thirty-seven papers covering technical, applied and general aspects of the subject will be read by international experts.

Every day industry is finding a thousand new uses for plastics—some in your business. Every day plastics products are replacing conventional materials in short supply. Come to this vital exhibition and see what plastics can mean to *you*. If you wish, write for further particulars to BRITISH PLASTICS, Dorset House, Stamford Street, London, S.E.1.

This is an Exhibition you must not miss

Exhibits include:

MATERIALS
Synthetic resins, moulding materials, laminates, sheeting, plasticizers and other essential ingredients.

PLANT AND EQUIPMENT
Injection and compression moulding presses, extrusion machines, moulds, etc.

MANUFACTURED PRODUCTS
Technical and industrial components, consumer goods and finished products of many kinds.

Organised by: "BRITISH PLASTICS," BRITAIN'S PREMIER PLASTICS JOURNAL

VIDEO-FREQUENCY OSCILLATOR

TYPE 0322

7 kc/s to 8 mc/s

Outstanding features of the Wayne-Kerr 0222 Video-Frequency Oscillator are its low harmonic content and unusual stability—both of frequency and amplitude. It can, in fact, be switched to any of the six ranges between 7 kc/s and 8 mc/s with no change in output level. A further advantage is the special facility for indicating the modulus of its load impedance to which it is connected. This instrument is easily carried about in its transportable case, or it can be supplied for rack mounting if preferred. FULL details from:—

Wayne Kerr

WAYNE-KERR LABORATORIES LIMITED, NEW MALDEN, SURREY

OKERIN Waxes

FOR THE ELECTRICAL INDUSTRY

ASTOR BOISSELIER & LAWRENCE LTD.
Sales Dept.: Norfolk House, Norfolk Street, Strand, W.C.2.
Works and Laboratories: West Drayton, Middlesex.

VARIABLE HIGH VOLTAGE LABORATORY & GENERAL PURPOSE POWER SUPPLY

TYPE 103 PMA

Input	230 V.A.C. 50 c/s
Output	500-12,000 V 1 mA maximum
Meter	Calibrated 0-12 KV.
Case	Blue stove enamelled steel case, 20½" x 10½" x 10½"

Full details of our standard equipment from 2,000 to 50,000 volts are available.

HAZLEHURST DESIGNS LTD
34a, POTTERY LANE
LONDON, W.11
TELEPHONE: PARK 6955

'Let's have "THE GONDOLIERS" AGAIN!'

Whatever your favourite piece of music, the Soundmirror will record it and play it back for you again and again. There is no end to the thrills which this new magic entertainer can bring. It will record the humorous patter of your favourite comedian, the art of the orator, the fun of a party or important family occasions like weddings. It will play them back with perfect fidelity immediately it is recorded and as often as you wish. Unwanted recordings are automatically erased as new ones are made and the magnetic tape used time and time again.

MODELS FROM £69 . 10 . 0 exclusive of microphone.

Manufactured under agreement with the Brush Development Co., of the U.S.A Licensed under the Brush Development Co., the Brush Crystal Co., Magnetone Inc., and Thermionic Products Ltd, Patent No. 454595 and others ; and patents pending in all the principal countries of the world.

THE **Soundmirror**

MAGNETIC TAPE RECORDER

Now available in England—the book "Magnetic Recording" by Dr. S. J. Begun. A comprehensive treatise. Price 25/-, postage 9d. extra.

Call on your local radio dealer and hear your own voice recorded or write for literature or a demonstration by appointment to the manufacturers.

THERMIONIC PRODUCTS LTD.

(Division SM/WW), Hythe, Southampton. 'Phone : Hythe 3265

London Showrooms : **Morris House, Jermyn Street, S.W.1**

Telephone : Whitehall 6422 (5 lines). Sales and Service Centres : Manchester, Birmingham, Bristol, Leeds, Newcastle, Glasgow, etc.

Beam Tetrode (Subminiature Output Valve)

XFY23



The very high efficiency of the XFY23 Beam Tetrode makes it particularly suitable for the output stages of hearing aids where the requirement is for large output at low values of H.T.

The XFY23 has, however, many other applications where small size, efficiency and economy are needed.

TYPICAL OPERATION

Filament Voltage		*1.25V*
Filament Current		*17½mA*
Anode Voltage	*15V*	*22½V*
Mean Anode Current	*200μA*	*400μA*
Optimum Load	*75KΩ*	*50KΩ*
Power Output	*1.0mW*	*3.75mW*

HIVAC

THE SCIENTIFIC VALVE

BRITISH MADE

GREENHILL CRESCENT

HARROW-ON-THE-HILL, MIDDLESEX

Telephone : HARrow 2655

Three heads are better than one!

For Standard and Microgroove Recordings

Green Spot with .001" radius sapphire for microgroove recordings.

Red Spot with .0025" radius sapphire for modern standard recordings.

Yellow Spot with .003" radius sapphire for older standard recordings.

These pickup heads are fitted with an easily replaceable armature system complete with a semi-permanent sapphire. Armature mass 20 mg.

Extremely low mass at needle point (4/5 mg. only), allowing for reduction in downward pressure to 10/12 grams for standard recordings, and 5/7 grams for microgroove recordings.

Prices: With one head £4 0 0 plus £1 14 8 Purchase Tax. Extra heads each £2 10 0 plus £1 1 8 Purchase Tax. Spare armature system with sapphire 14/8 including tax.

a *Connoisseur* product

Telephone: HALIFAX 69169

Manufactured by A. R. SUGDEN & CO. (ENGINEERS) LTD., Well Green Lane, Brighouse, Yorks.

Any Voltage regulation problems?

Do power cuts upset your production?

A Variac infinitely variable voltage regulating transformer will probably solve your problem. Write for 32 page Catalogue V549 which gives full details of the Variac transformers and their manifold applications.

CLAUDE LYONS LTD

189 Tottenham Court Road, London, W.1. *Tel: MUSeum 3025/6*
and 76 Oldhall Street, Liverpool 3, Lancs.

ICS

HOME STUDY backs radio experience with sound technical knowledge

MANY men who wished to link their radio experience with a sound technological background have received successful instruction by means of an ICS Course. Its value has been proved not only to amateurs but to men who already have a professional interest in radio and television engineering, including those taking qualifying examinations. It is invaluable, also, to students who wish to prepare themselves for a job in this field. Courses of instruction covering radio and, if necessary, television, include the following:

Complete Radio Engineering . Radio Service Engineers
Radio Service and Sales . Advanced Short-Wave Radio
Elementary Electronics, Radar and Radio
Television Technology.

And the following Radio Examinations

British Institution of Radio Engineers
P.M.G. Certificates for Wireless Operators
City and Guilds Telecommunications
Wireless Operators and Wireless Mechanics, R.A.F.

Write today for our FREE "**RADIO**" booklet which fully describes the above ICS Courses and the facilities for the complete study of Radio and/or Television technology. The ICS Advisory Department will also give free and impartial advice on the need for and the means of instruction.

Generous discount granted to members of H.M. Forces

International CORRESPONDENCE SCHOOLS

Dept. W.L.23, International Buildings, Kingsway, London, W.C.2

MUREX introduce a new Sintered COMPOSITE Magnet

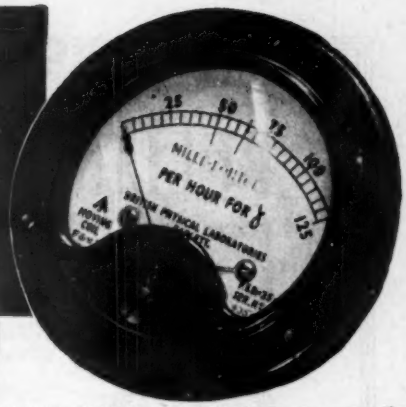

Photographs by courtesy of the British Physical Laboratories

MUREX COMPOSITE MAGNETS are generally supplied in the form of annular rings. One segment comprises a permanent magnet material of one of the standard aluminium-nickel-cobalt alloys the remainder of readily machineable soft iron. Simultaneous pressing and sintering of the two powders gives a single undivided unit without any break between the two materials. Composite magnets have a wide field of application, and are particularly suitable in moving coil instruments where a pole tunnel or fixing holes have to be drilled.

Principal advantages are :—*No necessity for separate pole-pieces ● No assembly arrangements between magnet and pole-piece ● Integral pole-piece and magnet means no loss of flux and no source of stray fields between magnet and pole-piece ● A constant field in the gap ● Greater flexibility of design and simplified assembly ● Considerable saving in cost.*

MUREX LIMITED (*Powder Metallurgy Division*) · **RAINHAM · ESSEX**

Telephone : Rainham, Essex, 240. *London Sales Office : Central House, Upper Woburn Place, W.C.1*

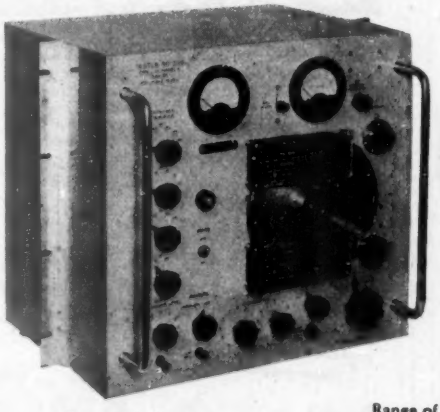

SELECTIVE

TRANSMISSION MEASURING SET

MODEL RP 3110

Designed and Manufactured for G.P.O.

This is a precision instrument for measurements on multi-circuit coaxial cable carrier systems by means of a comparison with locally generated signals of known frequency and level.

Frequency coverage : 60 Kc/s — 3 Mc/s in 7 ranges.

Calibration accuracy : below 0·2% or 2 Kc/s whichever is the greater.

Power supplies :
200 — 250 Volt, 50 c/s

Range of measurements :
through levels + 10 db to - 61·5 db
or terminated levels + 10 db to - 81·5 db
referred to 1mW in 75 ohms

BRITISH COMMUNICATIONS CORPORATION LTD.

GORDON AVENUE, STANMORE, MIDDX.

Telephone : GRIMSDYKE 2266. Cables : DISC, STANMORE.

CONSISTENTLY *Accurate*

PULLIN MINIATURE INSTRUMENTS

MOVING COIL - THERMO-COUPLE - RECTIFIER

Small round, square or rectangular pattern instruments for flush mounting or as round projecting types.

Available as Micro-ammeters, Milli-ammeters, Ammeters, Milli-voltmeters and Voltmeters.

Supplied in four sizes 2″, 2½″, 3½″ and 3½″.

Our catalogue giving scale ranges and prices will be sent on request.

MEASURING INSTRUMENTS (PULLIN) LTD

Electrin Works, Winchester St., Acton, London, W.3. 'Phone: ACOrn 4651

MIP

To avoid 'radio ailments'

EVERY GOOD RADIO DOCTOR PRESCRIBES OSMOR "Q" COILPACKS

...as specified for conversion of the Type 25 unit of the TR.1196, Type 18 and Wartime Utility receivers, and others.



These mighty midget coilpacks will cure your radio troubles and ensure better performance in every way. Easy to assemble, with only five simple connections, the pre-aligned "Q" Coilpack saves hours of frustrated grappling with complicated circuits. All types available for mains and battery sets, complete with full instructions and circuit diagrams.

Send 5d. (stamps) for free circuits and new Illustrated Lists of Coils, Coilpacks, and all Radio Components.

OSMOR RADIO PRODUCTS LTD. (Dept. W.19)

BRIDGE VIEW WORKS, BOROUGH HILL, CROYDON, SURREY

Telephone: Croydon 1220

SUCCESS?

START HERE

Never before has such a vast field of opportunity been open to the technically minded. Because we can call on the unique experience of the great E.M.I. Group ("H.M.V.", Marconiphone, etc.), our courses are based on the needs of modern industry. Let us help you to take advantage of the great demand for technicians in Radio, Television and all branches of Engineering. Take the first step NOW!

FILL IN FOR FREE BROCHURE

Mark the subject(s) which interest you, and post (without obligation): E.M.I. INSTITUTES, Dept. 16, 10 Pembridge Square, London, W.2.

☐ Mechanical Eng. ☐ Aeronautical Eng. ☐ Radio
☐ Production Eng. ☐ Draughtsmanship ☐ Matric
☐ Electrical Eng. ☐ Television ☐ Civil Service
☐ Other Subjects .....

NAME .....

ADDRESS ..... (BLOCK CAPITALS)

E.M.I.—the industry behind the College

I.200

Wolf

puts HIGH SPEED into SOLDERING

Built to increase output and cut costs over the whole field of soldering from fine instrument work to heavy industrial soldering. Only Wolf solderguns have all these outstanding advantages.

CHOICE OF 5 MODELS

OFF-STRAIGHT EASY-GRIP HANDLE
PERFECT CONTROL · QUICKER HEAT UP
LOCALISED HEAT · LOW CURRENT CONSUMPTION · MAINTAINS CORRECT HEAT · A MODEL FOR EVERY PURPOSE

Wolf Electric SOLDERGUNS

★ *Obtainable from all leading tool merchants and factors.*

HAVE YOU TRIED Automatic SOLDERING?

TYPE 51

Win new efficiency and economy with Wolf Automatic Soldergun. Its auto-feed, trigger-solder-feed action and perfect balance make it indispensable to all modern assembly.

WOLF ELECTRIC TOOLS LTD.
PIONEER WORKS, HANGER LANE, LONDON, W.5

Estd. **L·R·S** 1925

For PROMPT and EFFICIENT SERVICE

CASH or EASY TERMS

ARMSTRONG ALL-WAVE CHASSIS
(including speaker and output transformer)
MODEL EXP 83/3. Cash £22.5.6 or £8.0.0 deposit and 8 monthly instalments of 40/-
Passenger train 10/- extra.

CONNOISSEUR DUAL SPEED MOTORS
Cash £20.19.3 or £6.10.0 with order and 8 monthly instalments of £2.
—*Delivery from Stock*—

FREE TRIAL

REMINGTON
ELECTRIC DRY SHAVER

FREE TRIAL

***CLEAN · CLOSE · SMOOTH · FAST in fact* THE BEST SHAVE OF ALL !**

It really does give a better, more pleasant and quicker shave than the blade and soap method.

We are so convinced you will agree, that we shall be pleased to send either model on **TEN DAYS' FREE TRIAL** on receipt of deposit.

THE 'FOURSOME' (for average beards). Cash £7/16/5 or 30/- with order and 7 monthly instalments of 20/-.

THE 'FIVE' (for stubborn beards). Cash £8/17/7 or 50/- with order and 7 monthly instalments of 20/-.

Both above models AC/DC 210/240 volts.
DUAL VOLT MODELS
Also available—110/150, 190/250 volts AC/DC.

Both models supplied in beautiful silk-lined case. Prompt despatch per registered post. Write for the free Remington Brochure.

The L.R. SUPPLY COMPANY LTD.
(LONDON RADIO SUPPLY CO.),
BALCOMBE - - SUSSEX

H.F.
CHANNELISED TRANSMITTERS
(HC. 100 SERIES)

- **Output:** 400 watts for all transmissions.
- **Frequency Range:** 2 Mc/s to 27.5 Mc/s.
- **Transmission:**
  Telephony, (high level modulation).
  Telegraphy :—C.W. on/off. M.C.W. Frequency Shift.

The Series comprises nine standard editions offering :—

- **Simultaneous Operation** on 2, 3 or 4 pre-selected frequencies, depending on the types of transmission chosen.
- **Local or Remote Control** of each channel.

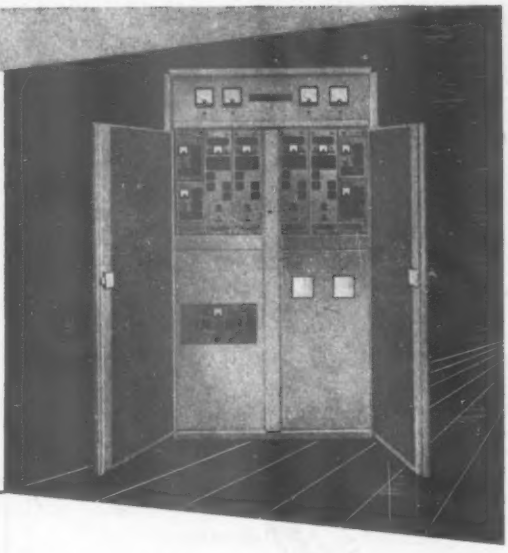

MARCONI COMMUNICATION SYSTEMS

SURVEYED · PLANNED · INSTALLED · MAINTAINED

MARCONI'S WIRELESS TELEGRAPH CO. LTD · MARCONI HOUSE · CHELMSFORD · ESSEX

COMPONENTS
IN A HURRY!!!

For some time past we have (we hope) been of assistance to manufacturers requiring COMPONENTS IN A HURRY.

We specialise in switches and high stability resistors—though of course we handle the multitude of other odds and ends that are today such a problem.

PERHAPS WE CAN HELP YOU?

TELE-RADIO (1943) LTD.
177, EDGWARE ROAD, LONDON, W.2

'Phone : PAD. 5606
PAD 6116

Shop Hours :
Mon.—Sat. 9 a.m.—6 p.m
Thursday 9 a.m.—1 p.m.

Carry IT IN YOUR POCKET

Makes Every TEST YOU NEED
THE
MULTIMETER 450
NEW ● ACCURATE ● ROBUST
INEXPENSIVE
18 RANGES
Internal Resistance 2,000 ohms per volt
● VOLTS: 15-150-300-750 A.C. & D.C.
● CURRENTS :
1.5-15-150mA - 1.5A A.C. & D.C.
● OHMS : 0-10,000-1M⌒. External shunts up to 750A.
● EXTERNAL MULTIPLIERS :
1,500 - 3,000 - 7,500V.

METRIX also make Signal Generators, Oscillators, Valve Testers, Impedance Bridges, etc. Ask for the Catalogue from :

A FEW AGENCIES AVAILABLE

CIE GENERALE DE METROLOGIE
ANNECY — FRANCE



CUT IT OUT!

FIT AN UP-TO-DATE . . .

McCarthy

5 VALVE SUPERHET CHASSIS

The large illuminated dial has a visible area of over 85 sq. ins. (over 550 sq. cm.), and presents a pleasing appearance. The pointer travel is 9" (23 cm.) giving an extended scale.

Visual wave-band and volume indicators.

Provision for gramophone pick-up and external low-impedance loudspeaker.

The loudspeaker plugs into the chassis.

S.W. 13-49.5 Metres
M.W. 187-556 Metres
L.W. 1000-2000 Metres

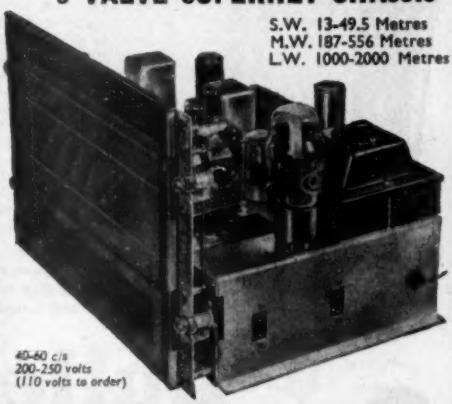

40-60 c/s
200-250 volts
(110 volts to order)

INSTALLATION ONLY REQUIRES RECTANGULAR APERTURE FOR PANEL ON WHICH KNOBS ARE ALREADY FIXED, THUS CHASSIS IS EASILY INSTALLED — AVOIDING THE NECESSITY FOR DRILLING SEPARATE HOLES.

£16·1·0 TAX PAID

McCARTHY RADIO (PROP. FELGATE RADIO LTD) STUDLAND ST., LONDON, W.6.

THE BEST FOR

TELEVISION

H.T. & E.H.T. SUPPLIES

Considerably reduced in size for any given output, "Westalite" rectifiers have proved themselves the most efficient for supplying H.T. and E.H.T. to radio and television receivers, and are extensively used in many well-known sets.
The miniature 36EHT tubular type rectifiers for E.H.T. supplies to the cathode ray tube are so light and small they can be soldered direct into the wiring of a receiver, anchored solely by their tag connectors.

If you require full information concerning

WESTINGHOUSE WESTALITE METAL RECTIFIERS

send 6d. in stamps for a copy of "THE ALL METAL WAY" to Dept. W.W.6.

WESTINGHOUSE BRAKE & SIGNAL CO. LTD., 82, YORK WAY, KING'S CROSS, LONDON, N.1

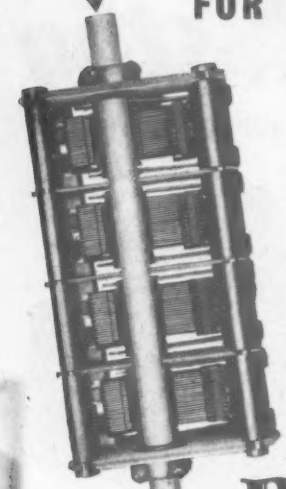

FOR HIGH-FREQUENCY INSULATION
—specify 'FREQUELEX'

The illustration shows a Four Gang Radio Variable Condenser using our "FREQUELEX" Ceramic Rod for the Centre Rotating Spindle. This Rod is 7½" long × .437" diameter, centreless ground to within plus or minus .0005". Maximum camber allowance of .002".
This is only one of many applications where Rods made to close limits are required.
We specialise in the manufacture of Ceramic Rods and Tubes of various sections in several classes of materials over wide dimensional ranges.

The Principal Materials Are:—
1. **Porcelain for General Insulation**
2. **Frequelex for High-Frequency Insulation**
3. **Permalex and Templex for Capacitors**

The degree of accuracy depends on the size of the Rod or Tube, but the standard degree of accuracy is outlined in the Inter Service Component Manufacturers' Council — Panel R Specification embodied in our Catalogue of Radio Frequency Ceramics, copy of which will be sent on request.
Large Rods up to 44" long and 1¼" square are used as supports for Tuning Coils, etc.
We shall be pleased to have your enquiries for all sizes of Tubes and Rods. Prompt deliveries can be given for most sizes.

Condenser manufactured by Messrs. Wingrove & Rogers Ltd.

Bullers LOW LOSS CERAMICS

BULLERS LIMITED, 6 Laurence Pountney Hill, E.C.4 Phone: MANsion House 9971 (3 lines) Grams: 'Bullers, Cannon, London'

BL1E

Widney-DORLEC
REGISTERED TRADE MARKS

CABINET SYSTEM

Technical Adviser :
C. H. DAVIS
59, BROMPTON RD.
LONDON, S.W.3.

Several of the scientific instruments displayed in the Festival of Britain exhibition are housed in Widney-Dorlec cabinets. If you do not already know about this unique cabinet system, write for details.

Widney PRODUCT
ESTABLISHED 1898

MANUFACTURERS
HALLAM, SLEIGH & CHESTON LTD
WIDNEY WORKS · BIRMINGHAM · 4
Phone: Aston Cross 0916 (4 lines) • Grams: Superfine, Birmingham

HOME and OVERSEAS
RADIO DEALERS & SERVICE ENGINEERS

Write for our 1951 Wholesale Price List, giving details of A. W. F. Loudspeaker cone assemblies, for fast, economical repairs in your own workshops. A. W. F. Range of Transformers for nearly all replacements. T. C. C. Capacitors, Tungsram Valves, Erie Resistors & Potentiometers. "View Master" & "Electronic Engineering" Televisor Components & Cabinets. Brass B. A. Screws, etc., and hundreds of other lines. **Postage 3d.** Inland. 2/- Overseas Air Mail.

A. W. F. RADIO PRODUCTS
TATLER CHAMBERS THORNTON ROAD
BRADFORD YORKS

MIRROR SPECIALISTS TO TELEVISION

J. PEARSON & SONS (LONDON) LTD.

announce a very much increased capacity for the supply of SURFACE MIRRORS of guaranteed quality.

Send your enquiries to :

RADIANT GLASS WORKS, BELFAST RD., LONDON, N.16. *Tel: STA.8885 or STA.3203/5*

FIGHTING THE CRIME WAVE...
with G.E.C.
QUARTZ CRYSTAL UNITS

The Police "999" emergency call system depends for its successful operation on instantaneous radio communication between Police headquarters and the fleet of patrol cars. Radio equipment in the patrol cars is used under the most arduous conditions but it must be available for instant use 24 hours in the day.

No wonder then that more and more Police authorities throughout the country are using G.E.C. quartz crystals in their radio equipment.

Pioneering research and experience in making over a million units, ensure a product of the highest quality. For all your quartz crystal requirements be sure to specify G.E.C.

Quick delivery service for urgent requirements for experimental or replacement purposes.

Write for our leaflet QC.4904.

SALFORD ELECTRICAL INSTRUMENTS LTD
PEEL WORKS, SILK STREET, SALFORD 3, LANCS.
A Subsidiary of
THE GENERAL ELECTRIC CO. LTD., OF ENGLAND

WILLIAMSON
Amplifiers



THE WILLIAMSON CIRCUIT AS PUBLISHED IN THE WIRELESS WORLD, AUGUST, 1949, IS THE ACCEPTED STANDARD FOR HI-FIDELITY REPRODUCTION.

Our version of the amplifier uses :—

★ **Impregnated grid coupling condensers.**
★ **Paper condensers on the H.T. supply line.**
★ **Matched or close tolerance resistors where balance is important.**
★ **Partridge Mains and Output Transformers.**
★ **Model D.P.S. with separate H.T. supply incorporated on the same chassis for use with multi-stage pre-amplifiers.**

Type KT66 amplifier to specification, illustrated, £28/2/6 incl. valves.
KT66 D.P.S. £32/10/0, inc. valves.
Type EL37 D.P.S. 9 watts output, £22 10 0.

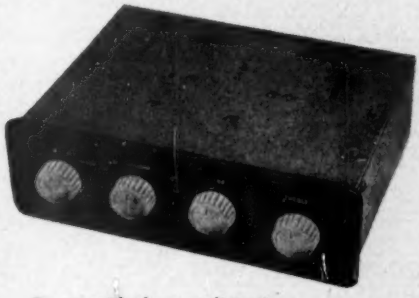

For use with above equipment :—
Wide range four-stage tone control and equaliser for L.P. and Standard records, with microphone and radio input. Complete with engraved perspex panel, **£8/5/0.**
With Hi-pass filter, **£11/11/0.**

GOODSELL LTD.
40, GARDNER STREET, BRIGHTON, 1
Telephone : BRIGHTON 26735

THE "PHIDELITY" MAGNETIC TAPE DRIVING MECHANISM

This most compact magnetic tape mechanism is based on the principle of the endless loop—no rewinding. Tape is contained in enclosed detachable cassette—30 minutes reproduction with full track recording at 3¾in. per second.
Space occupied only 10 in. x 6in.
Zero reset footage counter incorporated.
Relay operated automatic stop.
Supplied complete with erase and play/record heads..... £23 17 6
All recording equipment in stock including E.M.I. Tape, per 1,200ft. £1 5 0
G.E.C. High Coercivity, per 1,200ft. £1 10 0
Spare reels..... 4 0
Four Pole Motors, 1,400 r.p.m. £2 2 0
"PHIDELITY" Record/Playback head £3 6 6
"PHIDELITY" Erase head £3 4 6
"PHIDELITY" Cassette with 600ft. loops £1 8 6

"Q-MAX" MODEL G.D.O.I. GRID DIP OSCILLATOR

This Grid dip oscillator has a built-in mains power pack.
The frequency range is 1.5 to 300 Mc/s covered by means of a series of plug-in coils.
COIL RANGES (Extra coils 3/6 each).

(A) 1.5—3.0 Mc/s.	(E) 25—50 Mc/s.
(B) 3.0—6.0 Mc/s.	(F) 50—100 Mc/s.
(C) 6.0—12 Mc/s.	(G) 100—200 Mc/s.
(D) 12—25 Mc/s.	(H) 200—300 Mc/s.

9½ GNS. (WITH ONE COIL)

IN STOCK

WILLIAMSON AMPLIFIER COMPONENTS, including full range of precision resistors and condensers also output transformers by :
VORTEXION (Metal Core) £7 7 0
VORTEXION (Silcor I core) £4 4 0
PARTRIDGE (Unpotted) £5 13 0
PARTRIDGE (Potted)... £6 0 0
LEAK "Point One" Amp.£25 15 0
RC/PA/U Remote Control Pre-amplifier £8 10 0
Superhet Tuner Unit.....£31 9 9
DECCA Three Speed Motors £7 3 4
Twin Head Pick-up..... £3 19 4
CHANCERY 33⅓ r.p.m. attachment £3 12 6
Ditto with Decca Pick-up £6 3 6
CONNOISSEUR Twin Speed Motor £20 19 3
Pick-ups, dual heads..... £9 6 4
BARKER Natural Sound Speakers
Model 148a.....£15 15 0
Model 150a.....£18 18 0
W.B. CONCENTRIC DUPLEX:
10in. £7 7 0
12in. £15 15 0
WHARFEDALE :
Super 8CS/AL..... £4 12 6
Golden 10in..... £4 17 6
W10CS/B £8 10 0
Super 12/CS/AL £14 10 0
Choke Vol. Con..... £1 10 0
Microgroove Equal £2 15 0
Crossover network..... £3 9 6

SEND S.A.E. FOR SPECIAL LIST OF RECORDING EQUIPMENT

BERRY'S (SHORT WAVE) LTD.

25, HIGH HOLBORN, LONDON, W.C.1

M.R. SUPPLIES Ltd

For sixteen years we have been giving reliable service to Research and Development Departments and to the Universities. All goods are in brand new or otherwise perfect condition. All prices nett.
HIGH DUTY SELENIUM RECTIFIERS. Very useful ratings immediately from stock and below half price—all brand new. Funnel-cooled, full-wave, single units: 30 v. 20 amps., 72/6; 60 v. 10 amps. 72/6; 12 v. 50 amps, 94/- (despatch 3/6). Pair in Bridge: 30 v. 50 amps. £7; 60 v. 20 amps., £7; 120 v. 10 amps. £7 (despatch 4/6 the pair). Four in Bridge: 240 v. 10 amps £13/10/- the four (des. 5/6).
SIMPSON OHMMETERS, 0/2,000 ohms with 100/1 multiplier for 0/200,000 ohms (internal). Scale 2½in. calibrated 0/2,000 ohms with 20 ohms about half-way, giving very clear reading of low resistances. In black plastic case, approx. 6in. x 2in. x 1½in. with terminals C/2,000/200,000. Uses ordinary 1.5 v. U2 cell. Brand new, with instructions. 57/6 (des. 1/-).
EVERSHED OHMMETERS, Ex-Govt. Each instrument expertly overhauled and in perfect condition. Two scales on each, 0/1,000 ohms with clear readings 0.5 up to 100 ohms, and 0/200,000 ohms. With carrying case but less flash-lamp battery, £5/10/- (des. 1/6).
EVERSHED BRIDGE MEGGERS (250 v.). Ex-Govt. Each one expertly overhauled and in perfect order. Range: Megger 0/50 megohms. Bridge 0.01 ohms to 1 megohm, shown in four digit windows, with 10/1 and 100/1 multiplier and divider. With carrying case £17 (des. 4/6). This is a remarkable opportunity for these normally very expensive instruments.
ACCURATE TIMERS (Spring driven). Closes 1-amp. circuit each 60 seconds and gives audible signal each 10 seconds. Can be used to operate a buzzer for 1 second every minute—very useful in total darkroom. Precision made, in housing approx. 3in. dia. and 3in. deep. 15/- (des. 9d.).
SYNCHRONOUS TIME SWITCHES (Sangamo—brand new). 200/250 v. 50 c. One on-off sequence in 24 hours, minimum period between operations 15 minutes. Capacity 20-amps., with manual on-off switch and day-omitting device. In plastic housing with inspection window, £4/6/6 (des. 1/-).
REDUCTION GEAR BOXES (Ex-R.A.F.). Very well made with ball-bearing steel gears, in gun-metal housing approx. 3in. cube. Ratio 20/1 down. Fitted two shafts at right angles to each other. Weight 14 lb. £3/17/6 (des. 4/6).
TRIPODS FOR P.A. SPEAKERS. All steel, extending to 11ft. collapsing to 4ft. 6in., ample height selection, leg span about 6ft., rigid under all weather conditions, very sturdily made 55/- (despatch England 5/-).
KNIFE SWITCHES (G.E.C. new). Two-pole change-over, Q.M. & B. 30 amps. on paxolin base 9in. x 5in., with back terminals. 8/6 (des. 1/-).
LOW VOLTAGE HEATER PADS. 12/24 volts 70 watts, in copper sheathing 4in. x 2½in. with insulated terminals. Many domestic and industrial applications. 3/6 each (des. 6d.) or 10 for series use on 240 v. mains, for 30/- (des. 1/6). These can be used in immersion if seams are soldered.
PRECISION JEWEL TIPPED GRAMO-NEEDLES (over 1,000 playings). Standard or miniature shank, special limited offer 2/6. (Please state which shank).
STUART CENTRIFUGAL PUMPS from stock! Self-contained motor/pump units, brand new, guaranteed, for 220/250 v. A.C. operation. No. 10 (120 g.p.h.) 26/10/- (des. 1/6). No. 12 (600 g.p.h.) 29/10/- (des. 3/6).
HIGH DUTY VANE PUMPS (Positive displacement). Power required 1 h.p., up to 3,000 g.p.h. Lift 25ft. Head 175 feet. Ex-Admiralty, new, bronze throughout. Length overall 11in. height 7½in., inlet/outlet 1½in. (int.) £6/15/- (des. 4/6).
"FUZIT" ELECTRODE WIRE JOINTERS (S.T.C.). Magnificent offer of the 223 equipment, brand new, at exceptional "opportunity" price. For jointing wires, flex, tags, terminals, etc., 20/30 S.W.G. and up to .092 sq. in. area. Comprising robust portable transformer, 200/250 v. A.C., hand-steel, cable, etc., ready for use, £5/10/- (des. 4/6).
In Stock: Air Blowers and Extractor Fans, Lighting Dimmers, Fluxmeters, 0/25 and 0/50 Mirror Scale Micro-ammeters. Details on request.
M.R. SUPPLIES Ltd., 68, New Oxford Street, London, W.C.1
Telephone: MUSeum 2958

TUNERS



Our Type 84 is the ideal Quality Tuner for your high quality amplifier. This four valve Super-Het Unit has a lively performance with very low distortion. Fitted variable selectivity 7K.C. and 10K.C. Wave-band coverage 16-50m., 195-550m., 900-2,000m. Using latest Mullard valves ECH42, 2xEF41, EB91.

PRICE £12
+ £2 . 13 . 4 P.T.

Manufacturers of Ventex Cabinets.

C. T. CHAPMAN (Reproducers) Ltd. FLAxman 3217
RILEY WORKS, RILEY STREET, CHELSEA, S.W.10
Daily Demonstrations at Webb's Radio

"ADCOLA" SOLDERING INSTRUMENTS

Reg. Trade Mark



Reg. Design, 860302

Designed for Wireless Assembly and Maintenance.
SUPPLIED FOR ALL VOLT RANGES FROM 6/7v. TO 230/50v.
The three Adcola Models cover the requirements of the **Television, Telecommunication and Radar Engineers** and assure thorough jointing.
⅛in. dia. Bit. Standard Model— 22/6
¼in. dia. Bit. Standard Model— 25/-
⅛in. dia. Detachable Bit — — 30/-
Patented in England and Abroad.
Sole Manufacturers:
ADCOLA PRODUCTS LIMITED
General Offices & Works: CRANMER COURT, CLAPHAM HIGH STREET, LONDON, S.W.4. *Tele.: MACaulay 4272.*

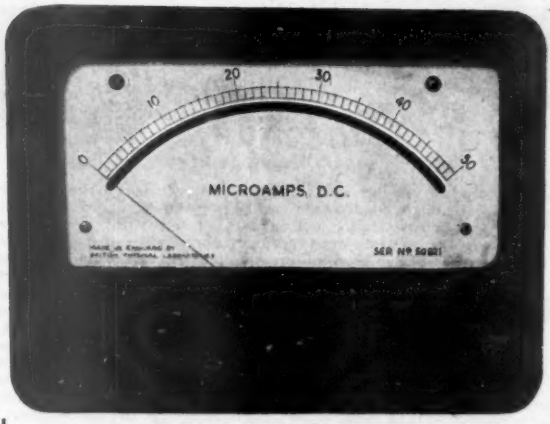

SIZE	2½"	3½"	5"
RANGE	25μA to 50A	10μA to 50A	10μA to 50A
PRICE			
50μA	62/-	76/-	105/-
200μA	50/-	61/-	95/-
1mA	42/-	54/-	87/-

(Export prices on application)

All sizes available with MIRROR SCALE

1st Grade Accuracy

SENSITIVE PANEL MOUNTING METERS

For particulars of these and our full range of measuring instruments write to :—

BRITISH PHYSICAL LABORATORIES

HOUSEBOAT WORKS · RADLETT · HERTS · Telephone: RADlett 5674-5-6

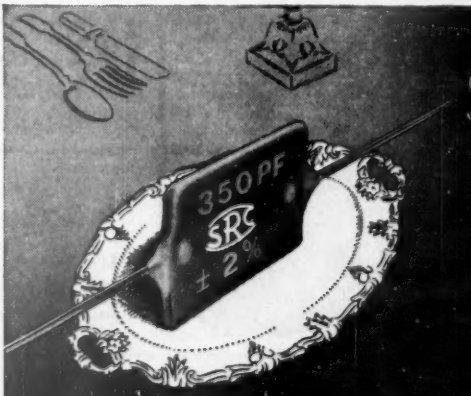

Precious Silver

In these days of steadily rising raw material prices precious Silver has become even more precious. For Silver, however, there is no substitute; Electrodes of our Capacitors are made from pure Silver; Contact Foils and Wire Ends are Silver plated.

The specialists for Silver Mica Capacitors

STABILITY RADIO COMPONENTS LTD.

COMMERCE ESTATE, WOODFORD AVENUE, LONDON, E.18.

BUCKHURST 6501/2

Design for Sound

There are, roughly speaking, three ways in which the problem of designing a loudspeaker can be approached. One can either accept current theory and employ knowledge and technique in producing an improved product, conduct extensive original research in the hope of proving present theory incorrect or act on a hunch in an effort to produce something different out of the blue. Although the " Klipschorn " Reproducer falls into the first category, this is hardly the place in which to discuss the relative merits of other " high fidelity " loudspeaker systems. It is generally agreed that for the best possible quality of reproduction, two loudspeakers are better than one and that a horn loaded loudspeaker is better than a direct radiator. The Klipschorn Reproducer incorporates both of these features, an outstanding point of the design being that the low frequency horn is of a re-entrant nature intended for fitting in the corner of a room, using the walls of the room as the final expansion of the horn, thus providing a loudspeaker capable of reproducing frequencies as low as 40 c.p.s. but at the same time being of comparatively small size. The H.F. section incorporates a high grade pressure unit and the horn is designed to give an optimum distribution for average rooms. The external design of the Reproducer is such that quality reproduction can be enjoyed without having to consider the alternatives of being relegated to the garage or divorce. It will be seen that there is little compromise in the design and consequently the price is not low. Whether it is worth it or not depends upon the value that one places on musical reproduction. It is quite easy to spend more to less effect. If you are interested we shall be pleased to send further details on request.

VITAVOX *Klipschorn*

Vitavox Limited, Westmoreland Road,
London, N.W.9, England.
Telephone : Colindale 8671
Cables : Vitavox, London, England.

AVAILABLE NOW!

A New **E.M.I.** Absorption Wavemeter



(1.6-30 Mc/s)

Direct Meter Readings

No Plug-in Coil

With this versatile precision instrument, the following checks and measurements can be made without coil changing.

It will give you :—

Measurement of transmitter frequency.
Harmonic indication.
Standing wave measurements.
Field Strength comparisons.
A check on oscillator frequency in Communication Receivers.
A check on over-modulation.

It has :—

Frequency engraved on scale.
Average maximum calibration error + or — 2%.
3-turn loop connected by a co-axial lead as a probe.
Sensitive germanium crystal.
A high grade microammeter.
Model AD/U408.
Price £8.15.0d. (Tax free)

E.M.I. SALES & SERVICE LTD.

AMATEUR DIVISION, HAYES, MIDDLESEX.

E.212

THE FIDELIA

Features include variable selectivity, infinite impedance detector, electronic bass and treble controls, push-pull triode output stage ; 3 wavebands 16-50, 190-550 and 1,000-2,000 metres. Audio amplifier response 30-15,000 cycles ; bass, treble and volume controls operate on gramo, suitable for lightweight p.u. Price £36 5s. Also 8 valve, £34 5s., 7 valve, £31 16s., 5 valve £15 15s. Data sheets on request.

9 VALVE DE LUXE R/GRAM CHASSIS



ELECTRO Acoustic DEVELOPMENTS
18 Broad Rd., Willingdon, Eastbourne, Sussex

TELEVISION INTERFERENCE Suppressors

For the alleviation and cure of the interference with Television, from motor cars, lorries, vans, etc.

Fit in a second!

A. F. BULGIN & CO. LTD
BYE PASS ROAD, BARKING, ESSEX

2/3

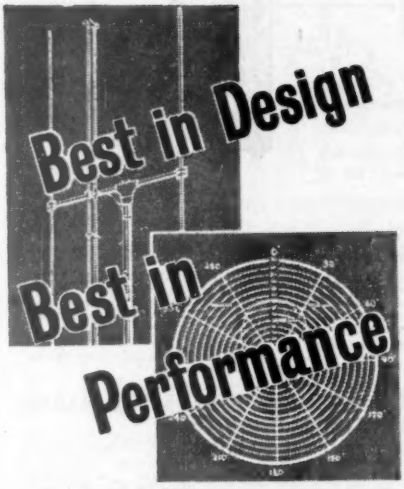

CLEAR PICTURES
in "poor reception" areas

The models 63 and 63A have been designed for maximum performance in fringe and difficult reception areas. Since the reception of your TV receiver is wholly dependent on the efficiency of the aerial system, the Aerialite features of greater gain, broader bandwidth and sharper directivity are very worthwhile. There is every reason why you should specify Aerialite for your TV aerial if you wish to ensure strong, clear and interference-free pictures. The models 63 and 63A are priced at **£11.15.0** and **£12.5.0** respectively, complete with 10ft. masts, lashings, etc. Models with 14ft. masts are available at **17/-** extra. Aerialite are manufacturers of a comprehensive range of TV and radio aerials as well as coaxial and R.F. cables.

Aerialite LTD.
CASTLE WORKS STALYBRIDGE CHESHIRE

WEBB'S Radio

A *reasonable approach* to *TWIN SPEAKER operation*

The advantage of using a "separator" for dividing bass and treble between two speakers is now fully recognised, and is a system used in various highly priced reproducers. Webb's offer combinations of speakers and cross-over units at a reasonable cost.

Bass and middle reproducer B.T.H. "R.K. Senior"	£6 . 15 . 0
Treble reproducer Stentorian "S812" 15 ohms ...	£1 . 10 . 0
Webb's type "C" Cross-Over Unit	£3 . 7 . 6
	£11 . 12 . 6

Full details of Webb's Cross-Over Units with circuits for home connection if desired, given with Webb's Catalogue 10d. post free.

All 12in. and 15in. Loudspeaker Units are becoming very delayed in supply, but while stocks last Webb's can supply

B.T.H. "R.K. Senior" £6 . 15 . 0
VITAVOX K12/20 ... £11 . 0 . 0

✲ ✲ ✲

Gramophone Motors, etc.

DECCA PLAYING UNIT "33A", single-speed 33⅓ r.p.m. with "L.P." type crystal pick-up	£ 9 . 9 . 0
DECCA "33B" as above but built-in leather-cloth covered carrying case	£12 . 1 . 6
DECCA "33C" portable playing unit 33⅓ r.p.m., fitted with Decca high-fidelity pick-up	£12 . 1 . 6
DECCA "MU10" Single-speed 33⅓ r.p.m. motor	£ 3 . 14 . 4
DECCA "MU14" Three-speed 33-45-78 motor ...	£ 7 . 3 . 4

GARRARD "AC6"
A first-class "78" motor
£6 . 15 . 10

✲ ✲ ✲

To your pleasure we demonstrate very fine reproducing equipment

WEBB'S Radio
14, SOHO STREET, OXFORD STREET, LONDON, W.1
Phone: GERrard 2089. Shop Hours: 9 a.m.—5.30 p.m. Sats. 9 a.m.—1 p.m.

ASSOCIATED ILIFFE TECHNICAL BOOKS

The books listed below are obtainable from leading booksellers everywhere or direct by post from: The Publishers, Dorset House, Stamford St., London, S.E.1. Send for the complete list of Iliffe Technical Books now available.

TELEVISION RECEIVING EQUIPMENT (3rd Ed.)

By W. T. Cocking, M.I.E.E. Explains the fundamentals of the subject and deals with practical details of receiver design. There is a lucid description of each stage of the normal television receiver, together with notes on special circuits. Additional chapters are devoted to faults and their remedies, servicing of modern sets and the problems of obtaining selectivity.

18s. net. By post 18s. 8d.

RADIO LABORATORY HANDBOOK (5th Ed.)

By M. G. Scroggie, B.Sc., M.I.E.E. This handbook shows the methods available for carrying out tests and measurements, either with commercial instruments or with improvised equipment. The fifth edition has been revised and new material added—in particular the more recent developments in valve oscillator design.

15s. net. By post 15s. 5d.

RADIO CIRCUITS: Step-by-Step Survey of Superhet Receivers (3rd Ed.)

By W. E. Miller, M.A. (Cantab.), M.Brit.I.R.E. This is the third edition of a book which has helped thousands of beginners to gain a full understanding of the workings of modern radio receivers. No other book sets out the principles, stage by stage from aerial to loudspeaker, so simply and clearly, yet in such practical form.

The author explains the operation of each section of a superhet receiver, so that the reader builds up his knowledge in easy stages, while at the same time missing none of the details. Mathematics and obscure theoretical considerations have been omitted, and very little previous knowledge on the reader's part is assumed.

5s. net. By post 5s. 4d.

TECHNICAL INSTRUCTIONS FOR MARINE RADIO OFFICERS (9th Ed.)

By H. M. Dowsett, M.I.E.E., F.Inst.P. and L. E. O. Walker, A.R.C.S. Provides simple instruction in general radio principles and practice for those who operate marine wireless equipment. The groundwork covered provides a complete theoretical course for the P.M.G.'s certificates—the syllabus for which, together with a specimen question paper, is included as an appendix. Former editions of this work were published under the title of "Handbook of Technical Instruction for Wireless Telegraphists." The ninth edition has been thoroughly revised and there are additional chapters on the cathode-ray oscilloscope, ultra high-frequency generators and radar recognition systems.

60s. net. By post 61s.

R.C.A. TRANSMITTER ET4336

NEW AIR TESTED



Available in quantity for export. Complete with Crystal Multiplier or V.F.O. British made Speech Amplifier and all valves.

T.1154 TRANSMITTER
COMPLETE WITH ALL TUBES IN TRANSIT CASES. £10.

IDEAL 25 WATT TRANSMITTER
Army type No. 12. Frequency coverage 1.2 to 17.5 mc/s. in four switched bands C.W. and Phone. Built-in Modulator, A.C. mains, 100 volt or 250 volt. Complete with all tubes and delivered. £25.

B.C. 375E TUNING UNITS
With cases T.U5, 22/6 each, plus 2/- carriage. T.U7/8/9/10 and 26B with cases, 12/6 each, plus 2/- carriage.

METERS
Desk type in case 0-1 m/A., 21/- each.
Round type 3in. diameter, 0-500 microamps, 20/- each.
Thermo-couple Ammeter 0-8A, 2in., 7/6.
MANY TYPES OF METERS in stock

Please state requirements.

HALLICRAFTER U.K. AGENTS

McELROY-ADAMS MFG. GROUP LTD.

46 GREYHOUND ROAD, LONDON, W.6.

Cables: Hallicraft, London. Phone: FULham 1802.

COILS • COILS • COILS

T.R.F. • SUPERHET • FILTERS • PACKS
TELEVISION COILS • I.F. TRANSFORMERS

FOR DEPENDABLE COMPONENTS CONTACT

OLYMPIC RADIO COMPONENTS

COIL WINDING SPECIALISTS & MANUFACTURERS

224, HORNSEY RD., N.7. NORTH 2914

RADIOMENDERS LIMITED

FOR SPECIAL TRANSFORMERS AND REWINDS

We specialise in

AMATEURS' WINDINGS, TRANSFORMERS ALL TYPES, CHOKES, PICK-UP COILS, INSTRUMENT COILS, Etc.

Highest workmanship **Good Delivery**

★

RADIOMENDERS, LTD.

Television & Radio Apparatus, Transformer & Coilwinders.

123-5-7 Parchmore Road,
THORNTON HEATH, SURREY

LIV 2261. Trade enquiries invited. Established 16 years.

FESTIVAL CHOICE

To represent the finest British work in precision electronic instrumentation the Festival of Britain authorities have chosen for exhibition the Marconi Universal Bridge, Output Power Meter and two Moisture Meters.
The Marconi organization's 50 years of leadership in electronics is apparent throughout the range of measuring instruments for industry, telecommunications and medicine.

- **TF 868 Universal Bridge** (*Dome of Discovery—Physics Section*)
- **TF 893 Output Power Meter** (*Transport Building—Communications Section*)
- **TF 933 Moisture Meter** (*Festival Ship "Campania"—Export Section*)
- **TF 874 Moisture Meter** (*Power & Production Building—Routine Testing*)

TF 868 UNIVERSAL BRIDGE

TF 893 OUTPUT POWER METER

TF 933 MOISTURE METER

MARCONI INSTRUMENTS

Marconi Instruments Ltd., St. Albans, Herts.

London Office: Marconi House, Strand, London, W.C.2. Midland Office: 19 The Parade, Leamington Spa
Northern Office: 30 Albion Street, Hull.

THE SIX-FIFTY-ONE

AUTO-RADIOGRAM

Cash Price

£89 . 15 . 0

A six-valve three waveband superhet, with 'push-pull' output, designed for high quality reproduction of radio and records.

Garrard Automatic Record Changer for all types of records, 10" speaker, storage space for over 200 records.

Superb Walnut Cabinet.

Obtainable from Ambassador agents only.

Illustrated literature gratis on application to:—

AMBASSADOR OF GREAT BRITAIN

PRINCESS WORKS
BRIGHOUSE · YORKS

Hear these amplifiers first . . .

PORTABLE BATTERY MAINS BM40

An attractive appearance and unique construction combined with first-rate performance give this instrument a hallmark of distinction. Peak power 40 watts, 30 watts undistorted. Designed for both A.C. Mains and 12-volt battery operation. Provision for independent electronic mixing of two microphones and one gramophone channel. Built-in vibrator. Special tone control circuit, with independent bass boost and cut, and treble boost and cut.
These and many other features make the BM40 the most up-to-date amplifier available.
List price **£50.**

MOBILE CAMPAIGN OUTFIT MA15

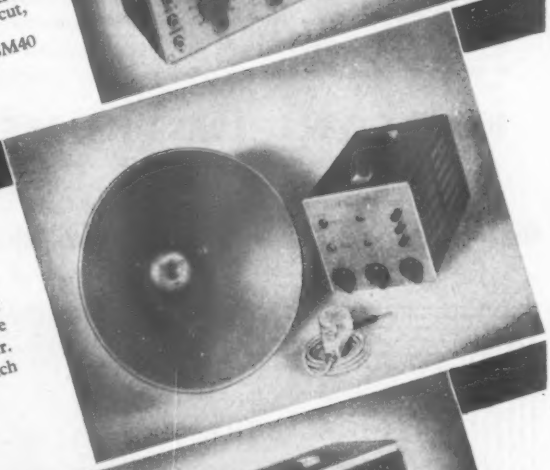

An ideal equipment for mobile applications, giving crisp, clear messages. The outfit comprises: 15 watt amplifier for either 6 volts or 12 volts operation; hand microphone type M.C.B., and co-axial weatherproof loudspeaker. A gramophone input and battery-saver switch are incorporated.
List price **£48 10s.**

30 WATT PORTABLE PA30/B

A 30 watt amplifier for public address men. Inputs for moving coil or ribbon microphones and gramophone. Tone control. Illuminated panel and output signal level indicator. Outputs: 7.5, 15 ohms and 100 volt line. Operates from 200/250 volts A.C. mains, or 12-volt battery when used with battery adaptor unit type LT30. An ideal equipment for P.A. vans, general installations and outdoor requirements. Supplied in a handsome portable case.
List price: PA30/B Amplifier, **£40.**
LT30 Battery Adaptor, **£12 10s.**

BIRMINGHAM SOUND REPRODUCERS LIMITED
CLAREMONT WORKS, OLD HILL, STAFFS. TEL.: CRADLEY HEATH 62123

BSR BRITISH SOUND REPRODUCERS

Wireless World

RADIO, TELEVISION AND ELECTRONICS

41st YEAR OF PUBLICATION

Managing Editor: HUGH S. POCOCK, M.I.E.E.
Editor: H. F. SMITH

JUNE 1951

In This Issue

EDITORIAL COMMENT 209

WROTHAM AERIAL SYSTEM. By *C. Gillam* 210

AUDIO-FREQUENCY VALVE VOLTMETER. By *S. Kelly* .. 215

LETTERS TO THE EDITOR 219

HOW TO CHOOSE A VALVE. By *T. Roddam* 221

WORLD OF WIRELESS 224

TELEVISION RELAY SYSTEMS 226

GRAMOPHONE TURNTABLE SPEEDS. By *G. F. Dutton* .. 227

INTERMODULATION TESTING. By *E. W. Berth-Jones* .. 233

NEW DAVENTRY STATION. By *R. W. Hallows* 236

FREQUENCY MODULATION—2. By "*Cathode Ray*" .. 239

TELEVISION AT SOUTH BANK 244

ALUMINIZING CATHODE-RAY TUBES. By *S. R. Neuberger* and *J. H. Jupe* 245

SHORT-WAVE CONDITIONS. By *T. W. Bennington* 247

RANDOM RADIATIONS. By "*Diallist*" 248

UNBIASED. By "*Free Grid.*" 250

PUBLISHED MONTHLY: Price 2/- (last Tuesday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. *Telephone:* Waterloo 3333 (60 lines). *Telegrams:* "Ethaworld Sedist, London." *Annual Subscription:* Home and Overseas, £1 7s. 0d. U.S.A. $4.50, Canada $4.00. BRANCH OFFICES: *Birmingham:* King Edward House, New Street, 2. *Coventry:* 8-10, Corporation Street. *Glasgow:* 26B, Renfield Street, C.2. *Manchester:* 260, Deansgate, 3.

VALVES...and their Applications

MINIATURE BATTERY RANGE

FILAMENT RATINGS

The valves in the Mullard miniature battery range have filaments with a nominal rating of 0.05A at 1.4V, with the exception of the output pentode which has a centre-tapped filament rated at 0.05A at 2.8V when the two sections are connected in series, or 0.01A at 1.4V when the two sections are connected in parallel.

It is necessary to take precautions to ensure that these ratings are not exceeded, and three normal ways in which the filament supply is obtained must be considered.

Dry battery operation with filaments in parallel

The rated terminal voltage of a single dry cell is 1.5V, and the valves are designed for use with such batteries. No special precautions against over-running the filament, therefore, are necessary.

Dry battery operation with filaments in series

This arrangement is frequently employed in portable and "personal" battery-operated receivers, and is also the normal practice in A.B.C. receivers, i.e. sets which can be operated either from batteries or from A.C. or D.C. mains through a rectifier. When the filaments are operated in series from a dry battery the voltage across any one nominal 1.4-volt section of filament must not exceed 1.6V, and this may be ensured by the use of shunting resistors across individual 1.4-volt filaments.

Operation with filaments in series from accumulators or mains supply units

In these conditions the circuit should be so designed that the voltage across each nominal 1.4-volt section of filament has a nominal value of 1.3V, and is maintained between 1.2V and 1.4V when the line voltage is 2.0V per cell in the case of accumulators, or is equal to the nominal line voltage of the mains supply.

These requirements cover tolerances on components, and the tolerances on mains tappings, a sufficient number of which must be provided to ensure that the requirements are satisfied.

In order to maintain the prescribed limits of filament voltage drop it is necessary to employ shunt resistors across individual filament sections.

Operated at 1.3V, the current in a single filament section is 47.4mA when no cathode current is flowing. In practical operation, however, the cathode current flows in the filament but is not uniformly distributed along it. Moreover, starting at the filament at the positive end of the series chain, each filament would have to carry the cathode current of all the preceding valves. The value of the shunts for each individual filament must therefore be calculated on the basis of the cumulative value of the cathode current at that point in the chain.

VARIABLE-MU H.F. PENTODE DF91

The DF91 is a battery-operated H.F. pentode in miniature construction on the B7G 7-pin all-glass base. It has variable-mu characteristics, and is primarily intended for use as a controlled R.F. or I.F. amplifier.

RATINGS AND CHARACTERISTICS

Filament

Suitable for D.C. operation only.

V_f	1.4 V
I_f	0.05 A

Capacitances

C_{a-g1}	<0.01 μμF
C_{in}	3.6 μμF
C_{out}	7.5 μμF

Operating Conditions as R.F. or I.F. Amplifier

V_a	45	67.5 V
V_{g2}	45	67.5 V
V_{g1}	0	0 V
I_a	1.7	3.4 mA
I_{g2}	0.7	1.5 mA
g_m	700	875 μA/V
V_{g1} ($g_m = 10\ \mu A/V$)	−10	−16 V
r_a	0.35	0.25 MΩ
V_a	90	90 V
V_{g2}	45	67.5 V
V_{g1}	0	0 V
I_a	1.8	3.5 mA
I_{g2}	0.65	1.4 mA
g_m	750	900 μA/V
V_{g1} ($g_m = 10\ \mu A/V$)	−10	−16 V
r_a	0.8	0.5 MΩ

Limiting Values

V_a max.	90 V
$V_{g2(b)}$ max.	90 V
V_{g2} max.	67.5 V
V_{g1} max.	0 V
I_k max.	5.5 mA

Other valves in this range include

DK91 Heptode Frequency Changer
DAF91 Short-grid-base pentode with diode
DL94 Output pentode

Reprints of this article together with additional data may be obtained free of charge from the address below.

Mullard

MULLARD LTD., Technical Publications Department, Century House, Shaftesbury Avenue, W.C.2.

MVM165

Wireless World

JUNE 1951 VOL. LVII. No. 6.

Metre-wave Broadcasting *Sub Judice*

THERE is nowadays a growing—and we think deplorable—tendency to postpone the discussion of an important matter with the excuse that it is "*sub judice*." That expression emphasizes an excellent principle of English law when, say, a man's life may depend on a fair trial by an unbiased and unprejudiced judge and jury, but is quite inapplicable to many of the questions of the day on which decisions may quite properly be influenced by public opinion.

Last month *Wireless World* posed a number of questions relating to metre-wave broadcasting, which we believe should be widely discussed before final plans are made for a nation-wide service. Little has been forthcoming in the way of answers; it seems to be generally believed in official circles that it is mildly improper to discuss such matters while they are *sub judice;* in other words, until the Beveridge report is debated in Parliament. That to us seems to be an indefensible attitude, involving unnecessary delay. When the debate comes, our legislators and their advisers should have the fullest possible collection of facts available to them, as well as information on technical opinion concerning debatable points.

One fact has emerged, though in a roundabout way. The Postmaster General, replying to a question in Parliament, has stated categorically that "B.B.C. proposals for a *frequency-modulated* very high-frequency broadcasting system are being examined." That confirms the view, expressed in *Wireless World* last month, that the B.B.C., as a result of the Wrotham comparative tests, would recommend frequency as opposed to amplitude modulation. Further confirmation to this has also been given by Sir Noel Ashbridge, Director of Technical Services of the B.B.C., in evidence before the Parliamentary and Scientific Committee. Speaking on the need for reinforcing our present broadcasting system, he said the Copenhagen Plan was not really satisfactory. The B.B.C. is in favour of f.m. because it gives wider coverage, and about 20 v.h.f. stations would be needed for the three-programme scheme already worked out—presumably for full national coverage.

So far so good. It might at least be thought we know where we stand on the question of modulation systems. But the P.M.G.'s replies to subsequent questions were made with great reserve: though he promised that the B.B.C. report would be considered as speedily as possible, he disclaimed full responsibility for acceptance or otherwise by stating that the Television Advisory Committee had to be consulted. From his reply it would rather seem that body is to be charged with the final responsibility of deciding on the system of modulation; the reply even accepted the possibility that the Television Advisory Committee might recommend a mixture of a.m. and f.m.! Though we believe the opinions of every interest concerned should be taken before decisions are reached, we are not convinced that the Television Advisory Committee is best qualified to be the final arbiter (as the P.M.G.'s reply suggested) on this important matter. Though some of the members have high scientific qualifications, the Committee as a body seems ill qualified to deal with the complex technical considerations involved.

Up to the time of writing the organized radio industry has not expressed its collective views on metre-wave broadcasting, though clearly nobody is more deeply concerned. Indeed, the problems involved are so complicated that unanimity must be difficult to reach, but no final decision can be reached without data on receiver design, production and maintenance. The industry at least need have no inhibitions in dealing with questions considered in official circles to be *sub judice*.

Finally, there is the question of control of e.h.f. broadcasting. There seems already a tendency to forget that the Beveridge Report left the door open for operation of such stations by independent bodies. While *Wireless World* certainly does not believe the future of British broadcasting to lie in sponsored or advertising programmes, we should greatly like to see the experiment of allowing a few stations to be run independently of the B.B.C. monopoly. Here at last is an opportunity to make an experiment that would surely please nearly everybody and offend hardly anybody.

Wrotham Aerial System

1—New Design of Slot-Radiator for V.H.F. Broadcasting

By C. GILLAM*

The Wrotham aerial is a high gain omni-directional v.h.f. radiator for horizontal polarisation. With its transmission line it is designed to handle simultaneously either three 25-kW f.m. transmissions or one 25-kW f.m. and one 18-kW a.m. transmission in the frequency band from 87.5 Mc/s to 95 Mc/s. The radiator consists of multiple co-phased slots fed by a branched transmission line. A "notch" type combining filter is installed for either two separate f.m. transmissions or one f.m. and one a.m. transmission.

THE v.h.f. broadcasting aerial system at Wrotham comprises a high gain omni-directional radiator, a rigid tube co-axial transmission line and a combining filter for two simultaneous transmissions. The radiator consists of an assembly of co-phased slots on the surface of a vertical cylinder which forms the upper part of a stayed mast. This mast has a total height of about 469½ ft above the ground level. The lower part, up to a height of about 357 ft is of lattice steel construction with a triangular cross section; near the top of this part there is a railed gallery. The upper part of the column is cylindrical with a diameter of 6 ft 6 in and right at the top there is a second railed gallery. The part of the cylinder forming the radiator proper is built up from eight cylindrical sections each 10 ft 6 in long, each section being made of four quarter-cylinder curved plates with angles welded on to all sides and ends. The plates and sections are bolted together through these angles and there are diametral cross struts at the section junctions. Each quarter-cylinder plate is pierced with a slot 8 ft long and 12 in wide; there are thus thirty-two slots in all, arranged in eight tiers of four slots equi-spaced around the cylinder, and with slots in successive tiers vertically above the lower ones. The television aerial support masts for the new high power stations, of which Sutton Coldfield was the first, are all provided with similar slotted columns for eventual use as radiators.

Inside the cylinder angle bars are fitted horizontally, forming a square cage about 4 ft 6 in on the side, the corners of which meet the cylinder mid-way between

* Marconi's Wireless Telegraph Company.

Fig. 1



Fig. 2



Fig. 3



Fig. 1. Current distribution around a radiating slot in an infinite conducting plane. Fig. 2. Skeleton enclosure of horizontal loops behind a vertical slot produces uni-directional radiation and behaves as a reflector. Fig. 3. In a folded slot currents on the central bar cancel out.

the slots. The bars are spaced about 1 ft apart vertically, and they form enclosures of segmental cross-section behind each slot. The distribution feeder system is accommodated inside the square cage, and sufficient space remains for climbing up through the radiator column.

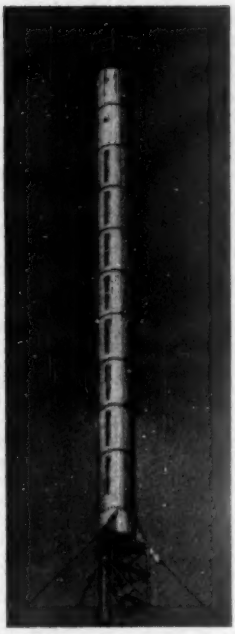

A comparatively high gain in all directions is obtained with the Wrotham v.h.f. aerial by arranging the 32 slot radiators in eight tiers with four in each tier spaced equally round the circumference of the cylindrical top section.

How a Slot Radiates

Slot aerials are perhaps a little unfamiliar, and at first glance it is difficult to see what they have in common with other types of aerial. The simplest view-point is to regard the slot as a means of persuading currents to flow in a desired manner in the conducting sheet in which the slot is cut, and then to consider radiation in terms of these currents. The usual slot is about half-a-wavelength long and rather narrow. It is fed by connecting a generator—or more usually the inner and outer conductors of a co-axial transmission line from a generator—across the slot lips at the centre of their length. Viewed from the feed points, the slot edges form short-circuited transmission lines a quarter-wavelength long. Such lines have a high input impedance, but a comparatively large current flows in the short-circuited ends. As will be seen from Fig. 1, rather large currents flow in the conducting sheet at the ends of the slot. There are, of course, also currents flowing in the sheet lengthwise of the slot, but as the figure shows, they flow in opposite directions on the two sides of the slot and in the upper and lower parts, so that they practically cancel each other out. The radio-frequency difference of potential across the slot lips sets up an electromagnetic field in the slot which radiates outward on both sides of the conducting sheet. This field is polarised in the plane at right angles to the slot length, that is, its electric force is in this plane. As mentioned earlier, the radiation can equally well be accounted for in terms of the currents flowing in the sheet at the ends of the slots, and it is then clear that the magnetic force is in planes lying parallel to the slot length. A slot radiator behaves in fact very much like a dipole aerial but with the planes of magnetic and electric force interchanged with respect to the length of the radiator.

Just as arrays of dipoles can be used to increase the directivity and gain of an aerial, so also can slots be stacked in horizontal and vertical rows for the same purpose. Another useful feature is that the slot can be turned into a uni-directional radiator by enclosing it on one side with a cavity. That this can be done is readily appreciated by considering a horizontal loop with a total length of half-a-wavelength connected from one side of the slot to the other, as shown in Fig. 2. Such a loop will have a high input impedance, i.e., it will accept very little current and so disturb only to a very small extent the conditions existing at the slot lips. Additional similar loops can be added above and below the first one, and if desired they may be put in contact with each other so that a continuous screen is formed. All radiation into the cavity so formed will then be reflected back and will reinforce the outward radiation. In fact, for this purpose the screen need not be continuous, and it is sufficient for the loops to be not more than about one-tenth of a wavelength apart. The exact cross-sectional shape of the enclosure—or skeleton enclosure—at the back of the slot is not critical; the length of path from one side of the slot mouth to the other is, however, an important factor which affects the feed-point impedance, and it needs to be near to a half-wavelength.

As would be inferred from the behaviour of a quarter-wavelength short-circuited transmission line, the feed-point resistance of a slot fed at its centre is rather high, 600 ohms being the order of value for normal proportions. However, just as the input impedance of a dipole aerial can be raised by "folding" it, so the impedance of a slot aerial can be lowered by similar means. In other words, the input *admittance* of a slot is affected by folding in the same way as is the input *impedance* of an ordinary dipole. Fig. 3 shows a folded slot, and it will be seen that the generator e.m.f. is in effect applied across only one-half of the slot width.

Returning now to the enclosed slot, the cavity behind the slot becomes filled with an electromagnetic field. This consideration leads to the converse of the previous procedure, in which a field is excited inside the cavity by any suitable means, and it then propagates out through the slot as radiation. In doing so it sets up a similar distribution of currents on the conducting sheet as would have occurred if the slot lips had been directly excited. Naturally, the field set up in the cavity must have the same character; that is, the same frequency and plane of polarisation whichever way it is produced.

Wide-Band "Folded" Slots

The Wrotham slots are fed in such a way that they behave as "folded" slots, with the result that the feed-point impedance is approximately 140 ohms, but in order to reduce the variation of feed-point impedance with frequency, a system of reactance compensation* is introduced. Each slot is fed by a co-axial feed line which terminates near the horizontal centre line of the slot in one corner of the square cage. At this point the outer conductor is earthed to the bars, while the inner conductor passes into the slot enclosure, and continues as a horizontal open conductor running just behind the cylindrical surface to a point near the horizontal and vertical centre of the slot opening. There it is joined to a vertical

* "Wide-band Folded-slot Aerials" by G. D. Monteath. *Journal I.E.E. 97, Part III, p.* 414.

conductor which passes upward or downward on the centre line of the slot to one end of the opening where it connects with the cylinder wall. As seen from the end of the horizontal conductor, the vertical conductor forms with the cylinder wall a half-wavelength transmission line short-circuited at its termination. At its resonant frequency, the input impedance of this line is zero, so that the end of the horizontal conductor is joined to the wall of the cylinder by a connection of zero impedance. At frequencies off resonance, this line adds a positive or negative reactance in series with the slot feed impedance. Current flows from the inner conductor of the feed line along the horizontal conductor, and returns by way of the vertical conductor to the cylinder wall and the outer conductor of the feed line. The current on the horizontal conductor sets up a radio-frequency field in the slot enclosure, which is able to emerge from the slot opening as radiation, in so far as it is horizontally polarized and the slot is resonant at the appropriate frequency.

The energy lost by radiation is supplied from the transmitter by the feed line, and there is a corresponding real term in the feed line termination impedance. Over the rather wide frequency band in which radiation is required, the feed-point impedance would vary considerably, were it not for the behaviour of the vertical conductor as a reactance compensator. Both the length and the diameter of this conductor are chosen and adjusted critically for optimum results in this respect. The horizontally polarized field is unable to pass through the horizontal bars of the slot enclosure into the square cage; but there is some vertically polarized field due to the vertical conductor, and a continuous steel strip 6 in wide is fitted to the horizontal bars behind each line of slots to prevent this entering the cage. This vertically polarized field cannot emerge from the slot opening as radiation. Because of the enclosure of the slots they have comparatively little mutual influence on each other.

Co-Phase Feeding

All the slots of the radiator are fed in identical phase. This statement, unambiguous as concerning co-planar slots, requires further elucidation when applied to slots in a cylindrical surface. It means that if observers were situated at equal distances from the cylinder axis in directions radially from each of the four slots, and if they fixed their attentions on the electric vector of the radiation emerging from the slot opening facing them, then at a given instant all observers would see the vector pointing in the same direction relative to themselves. This situation is made clear by Fig. 4. The electric vectors thus all point round the cylinder alternately in one direction and then in the other. At sufficient distance from the axis of the cylinder, the field strength is practically constant in any radial direction; that is, the horizontal radiation pattern is almost circular. If it were required to radiate a higher frequency band with a similar horizontal radiation pattern it would be necessary either to increase the number of slots around the circumference of the cylinder, or to decrease the cylinder diameter. Similarly for lower frequency bands and for the same cylinder diameter, three or two slots around the circumference would suffice, and in the limit at a sufficiently low frequency, the pattern would be nearly circular with only a single slot on one side and the radiator becomes the American-designed "Pylon."



Fig. 4. In the Wrotham aerial system all slots are fed in identical phase and the arrows shown here indicate the instantaneous direction of the electric vetor for all radiators.

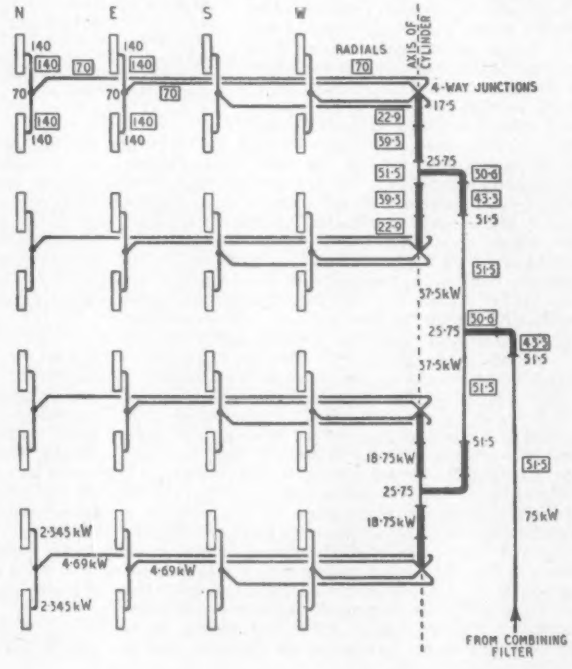

Fig. 5. Wrotham distribution feeder system with cylinder opened out into a flat plane. Radial feeders are all of equal length with point impedances shown as plain figures and characteristic impedances in "boxes."

As compared to the radiation in the maximum direction from a single half-wave dipole, the assembly of four slots forming one tier of the Wrotham aerial has a gain of about unity. The stack of eight tiers then has an effective power gain of eight, or about 9 db.

The distribution feeder system is required to divide the transmitter power equally among the thirty-two slots, and to deliver it to the feed-points in equi-phase. This is accomplished by successive bifurcation of the feeder, with impedance matching at each junction, and with all paths from the first bifurcation to the slot feed-points of exactly equal lengths. There are more ways than one in which the slot feeds might have been progressively combined. At one extreme there could have been a single junction point with thirty-two feeders of equal length; apart from mechanical difficulties, an impedance transformer working from the very low resistance value of about 4.4 ohms would have been formidable. In the opposite direction, the slot feeds could have been combined first in pairs, then in fours, then in eights, and finally in sixteens, and there would still have been plenty of choice as to whether to start with vertical pairs, side-by-side pairs, or opposite pairs, and so on. The method finally adopted had little beyond a certain convenience to recommend it. It is shown diagrammatically in Fig. 5, which represents the cylinder as if it were slit down one side and opened out into a flat sheet. The individual feed-point impedances are about 140 ohms each. The slots are first combined in vertical pairs by 2-in diameter lines of 140 ohms impedance, running vertically near the corners of the square cage. At their centres these lines tee into 2-in diameter 70-ohm lines running radially from a central four-way junction box. The impedance at the input to this junction is then $70/4 = 17.5$ ohms, and it feeds a group of eight slots. There are four similar junction boxes at levels corresponding to $\frac{1}{8}$, $\frac{3}{8}$, $\frac{5}{8}$ and $\frac{7}{8}$ of the radiator height.

Impedance Matching Transformers

Double quarter-wave transformer sections are joined directly to the junction boxes, and run alternately upward and downward along the axis of the cylinder; these transform the impedance to 51.5 ohms, and the lines are continued at an impedance of 51.5 ohms until they meet at tees at the $\frac{1}{4}$ and $\frac{3}{4}$ levels. These lines and transformers have an outer diameter of 3¼in. At the tees, the impedance drops to 25.75 ohms, and it is restored to 51.5 ohms again by further double quarter-wave transformers. Here again, the lower transformer points upward and the upper one downward, and they are continued by 51.5-ohm lines until they meet at the final tee at the vertical centre of the radiator. This intermediate feeder and its transformers have an outer diameter of 5in. At the final tee the main transmission line is connected through a further double quarter-wave transformer. On Fig. 5 point impedances are indicated by plain figures, and the characteristic impedances of the various parts of the feeder system, including the transformer sections, are indicated by a figure in a rectangle. All parts of the distribution feeder system are in rigid copper co-axial lines, with ceramic insulators throughout. It should be noted that the references above to the "outer" diameters of the feeders, transformers, etc., refer to the *inside* diameter of the outer conductors.

Since at every branch point the branch impedances are identical, the power divides uniformly between the

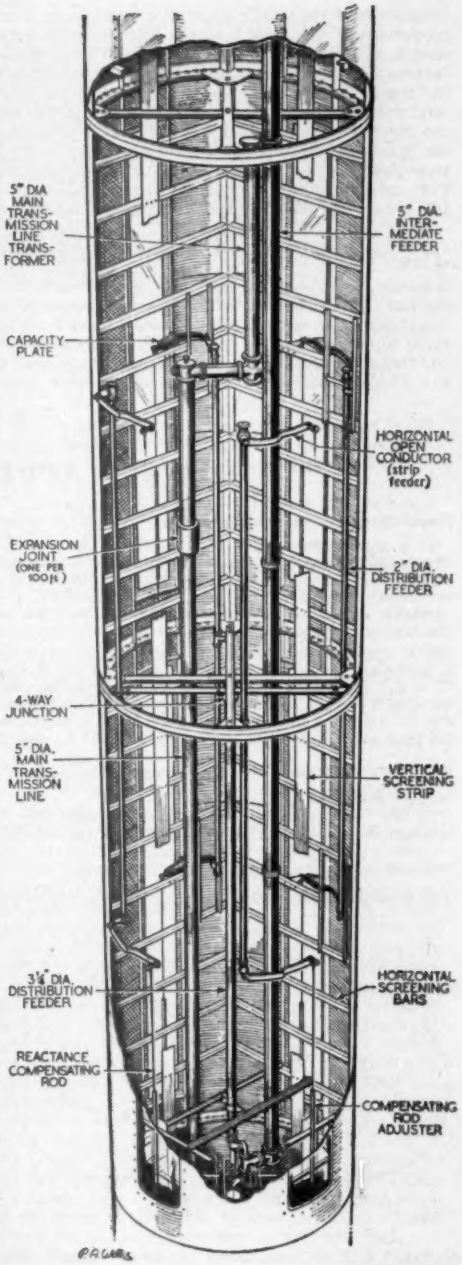

The main transmission line and part of the distribution system to the 32 slots in the aerial cylinder are shown in this cut-away view.

branches and eventually every slot receives an equal proportion of the total power. The complete aerial system was required to deal with up to three simultaneous f.m. transmissions on different frequencies in the band, each with a power of 25 kW. Thus the total power input to the radiator could be 75 kW and the power per slot 75/32 kW = 2.34 kW. These are the figures which control the conductor sizes from the view-point of r.m.s. current to be carried and heating. For example, the slot-feed-point impedance is 140 ohms, and so the r.m.s. current at that point is $\sqrt{\frac{2340}{140}} = 4.09$ A. In providing adequate flash-over distances, however, it is necessary to take account of the fact that the voltages of the separate transmissions can at particular instants add in phase to give a voltage three times as much as for one 25-kW transmission, and hence equivalent to an instantaneous power of 9×25 kW = 225 kW. All parts of the main transmission line and distribution feeder system were designed to carry voltages equivalent to this instantaneous power with an adequate safety factor. Fortunately there were no very serious problems in this respect; the corresponding r.f. voltage peak on the main 5-in 51.5-ohm transmission line is 4812, and at the slot feed point 1400.

In order to meet the very low standing wave ratio specified for the complete aerial system, it was necessary to divide the frequency range from 87.5 Mc/s to 95 Mc/s into two over-lapping parts, and to provide for separate adjustments at the slots. Thus, with one set of adjustments the range from 87.5 Mc/s to 93 Mc/s can be covered, and with the alternative adjustments from 89 Mc/s to 95 Mc/s. Over both parts of the range the standing-wave ratio measured at the input of the main transmission line transformer is less than 1.1. An explanation of the wide-band impedance compensating action of the double quarter-wave transformer is given in Appendix 1.

(To be concluded)

APPENDIX 1

Double Quarter-wave Transformer

If a quarter-wavelength of transmission line with a characteristic impedance of Z_o is terminated by a resistance of value nZ_o, then the input impedance of the line is a resistance value of $Z_o^2/nZ_o = Z_o/n$. Alternatively, if a resistance of nZ_o ohms has to be matched to a line of characteristic impedance Z_o ohms, a quarter-wavelength of line of characteristic impedance $Z_1 = \sqrt{Z_o \cdot nZ_o} = Z_o\sqrt{n}$ is interposed. The input impedance of this line is then $Z_1 = Z_1^2/nZ_o = Z_o^2 \cdot n/nZ_o = Z_o$, i.e., the required value for match. This is demonstrated on the Smith Chart Fig. 1. Here n is taken as 0.5 and the point P_1 represents the value nZ_o; Z_1 must be made equal to 0.707 Z_o, and P_1 has to be "normalised" to this value, giving $\frac{nZ_o}{Z_o\sqrt{n}} = \sqrt{n} = 0.707$ shown at P_2.

At the other end of the quarter-wavelength line P_2 becomes $P_3 = 1.414$. This value has to be renormalised to Z_o, i.e., $\frac{1.414 \times 0.707 \times Z_o}{Z_o} = 1$

This is satisfactory enough at the single frequency for which the length of Z_1 line is exactly a quarter wavelength. At a higher frequency, the line has a greater length, so that the P_2 point finishes beyond the resistance axis at, say P'_2, on Fig. 2, and this when renormalised becomes P'_4, which certainly does not match Z_o.

Using a double quarter-wave transformer effects a considerable improvement. For this, the first line has a characteristic impedance $Z_1 = \sqrt[4]{(nZ_o^3)}Z_o = Z_o\sqrt[4]{n^3}$ and the second line has a characteristic impedance $Z_2 = \sqrt[4]{nZ_o \cdot Z_o^3} = Z_o\sqrt[4]{n}$.

At the end of the first length, the impedance is then $\frac{Z_o^2\sqrt{n^3}}{nZ_o} = Z_o\sqrt{n}$, and at the end of the second length, $\frac{Z_o^2\sqrt{n}}{Z_o\sqrt{n}} = Z_o$, giving the required match.

This is shown again on the Smith Chart Fig. 3, for the values in the earlier example. P_1 is as before.

$Z_1 = Z_o\sqrt[4]{0.5^3} = 0.595\ Z_o$, so that P_2 is at 0.5/0.595 = 0.84. P_3, at the junction between the lines is, 1/0.84 = 1.19 in terms of Z_1.

$Z_2 = \sqrt[4]{0.5} = 0.84$. Renormalising P_3 to Z_2 gives $P_4 = 1.19 \times 0.595/0.84 = 0.84$. P_4 thus superimposes on P_2, and at the end of the second line, $P_5 = 1/0.84 = 1.19$ in terms of Z_2. Finally renormalising to Z_o gives $1.19 \times 0.84 = 1$.

Again consider a higher frequency, f_1, for which both transformer lines are above a quarter-wavelength long. P_2 on Fig. 4 is now beyond the R axis at P'_2, and when renormalised, it goes to P'_4, still to the left of the R axis. But the second line length now brings this to P'_5, almost exactly on the R axis again, and final renormalising to Z shows an almost perfect match.



Fig. 1



Fig. 2



Fig. 3



Fig. 4

Audio-Frequency Valve Voltmeter

Direct Readings of Inputs from Millivolts to Volts

By S. KELLY*

VALVE voltmeters have long been considered essential pieces of laboratory test equipment their chief merit being a high input impedance which has enabled them to be used on circuits where the loading of moving-coil, moving-iron instruments etc. draws too much current to give accurate readings. Generally, the emphasis has been towards high frequencies at moderately high voltages; and the audio engineer, with some justification may feel neglected.

The requirements of the audio laboratory are somewhat different from those predominating in the radio frequency sections. In addition to a high input impedance, high sensitivity and a very good low frequency response are necessary. For example, present day high-fidelity moving-coil pickups give outputs of only a few millivolts. the conventional valve voltmeter cannot be used unless a pre-amplifier is fitted to it, and even then there may be some doubt about the calibration at very low frequencies. There are numerous other measurements, such as measuring the insertion loss of filters, attenuators, transformers, which all demand a sensitive valve voltmeter. Investigation of loudspeaker problems can often be considerably simplified if a response curve of the acoustic output can be made in addition to the more usual voice-coil impedance tests, and even an uncalibrated microphone connected to a sensitive voltmeter will provide much useful information.

General view of finished instrument.

The instrument described in this article is designed to meet the above requirements, the specification being:

Voltage Range: 1 millivolt to 10 volts in four decades of 0-10 millivolts, 0-0.1 volt, 0-1 volt, and 0-10 volts.

Input impedance: To be greater than 10 MΩ across 10 pF.

Output impedance: To be less than 500 ohms.

The unit to be self-calibrating, easily portable and capable of being built with standard components.

Design

The instrument consists, essentially, of a two-stage RC-coupled feedback amplifier, with a fixed gain of approximately 60 db, the gain being primarily determined by the feedback network; and an input and output stage, each consisting of a cathode follower; the input cathode follower being necessary to enable a high and a constant input impedance irrespective of range switching, and the output to provide a low output impedance in order to enable a wide choice of indicating instruments to be used. The complete circuit diagram is given in Fig. 1. Range switching is achieved by fitting a potential divider in the cathode circuit of the first cathode follower; it may be mentioned here that the only precision resistors required are used for range switching in this cathode circuit. An alternative system, is also described which will permit the use of standard radio tolerance resistors.

Calibration is effected by arranging for the output voltmeter to read the filament voltage (Cal. 1), and for the filament voltage then to be switched to the input of the amplifier (Cal. 2), the feedback potentiometer being adjusted until the two readings are identical. It will be seen that the accuracy of calibration will be determined solely by the output voltmeter and not the long-term stability of the amplifier.

The power supply is conventional, a 250-V half-wave rectifier system being used. The components are the same as those specified for the *Wireless World* "Midget A.C. Mains Receiver" and are obtainable from Stern Radio, 109 and 115 Fleet Street, London,

* Cosmocord Ltd.

Layout of parts is not critical, but screening should be provided between V1, V2 and V3, V4, and the switch wafer (S1C) associated with the calibrating circuit should be outside the V1, V2 screen.

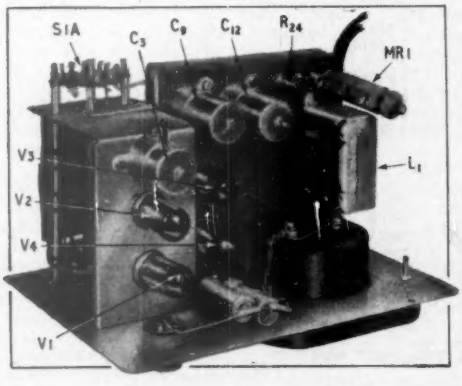

E.C.4. No trouble has been experienced when using this transformer, and although the filament circuit is somewhat overrun, the temperature rise is not excessive. The power supply is not critical, and any well-smoothed unit giving 200 to 300 V at 20 to 30 mA is satisfactory. Fig. 2 shows an alternative power supply using 250-0-250-V, 30-mA transformer with a valve rectifier, the smoothing consisting of two 10-henry chokes and three 16-μF condensers in place of the 40-henry choke and the 32 + 16 μF. condenser used with a half-wave rectifier. The constructor should not experience any difficulty in obtaining the very reasonable amount of smoothing required from standard components. With either of the power supply circuits shown, the smoothing is adequate when the valve voltmeter is used with either moving coil or crystal microphones. The "humdinger" potential divider R_{24} has been found essential when operating the filament of the first two valves from a.c.; it is a pre-set unit fixed to the chassis, and should be adjusted (with the amplifier in its cabinet and a shield connected over the input socket) for minimum voltmeter reading, which should never be more than the first division of the scale.

Electrostatic Screening

The layout of the amplifier is not critical, provided that the following points are observed: The input impedance of the amplifier is extremely high and is therefore very sensitive to any stray electrostatic fields. It is essential that the whole amplifier be contained in a completely shielded metal container and that preferably V1 and V2 should be in their own shielded compartment. If the self-calibrating circuit is used, the wafer (S1C) carrying the filament supply

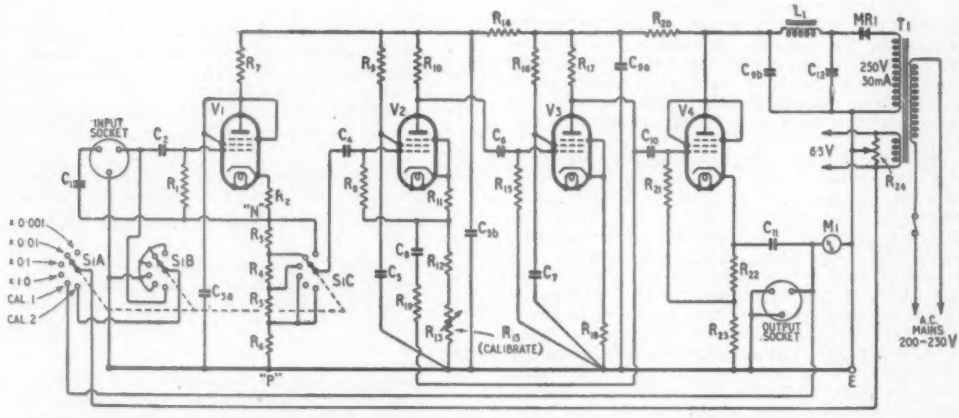

Fig. 1. Complete circuit diagram of valve voltmeter in its original form. Alternative range switching and power supply circuits are given in Figs. 2 and 3.

List of Components

Resistances:

R_1	—	½ W*
R_2	3.3 kΩ	½ W
R_3	50 kΩ	1 W* 1 %
R_4	5 kΩ	1 W* 1 %
R_5	500 Ω	1 W* 1 %
R_6	55.5 Ω	1 W* 1 %
R_7	50 kΩ	1 W(w.w.)
R_8	0.47 MΩ	½ W
R_9	0.47 MΩ	½ W
R_{10}	100 kΩ	½ W
R_{11}	100 Ω	½ W
R_{12}	50 Ω	½ W
R_{13}	50 Ω	Variable
R_{14}	20 kΩ	½ W
R_{15}	0.47 MΩ	½ W
R_{16}	0.47 MΩ	½ W
R_{17}	100 kΩ	½ W
R_{18}	100 Ω	½ W
R_{19}	100 kΩ	½ W
R_{20}	10 kΩ	2 W (w.w.)
R_{21}	0.47 MΩ	½ W
R_{22}	330 Ω	½ W
R_{23}	10 kΩ	2 W(w.w.)
R_{24}	50 Ω	Variable
R_{25}	39 kΩ	½ W
R_{26}	10 kΩ	Variable
R_{27}	2 kΩ	Variable
R_{28}	3.3 kΩ	½ W
R_{29}	200 Ω	Variable
R_{30}	330 Ω	½ W
R_{31}	20 Ω	Variable
R_{32}	39 Ω	½ W

Capacitors:

C_1	0.1 μF	250 V
C_2	0.01 μF	250 V
C_3	16 + 16 μF	350 V
C_4	0.25 μF	250 V
C_5	0.25 μF	250 V
C_6	0.25 μF	250 V
C_7	2 μF	250 V
C_8	2 μF	250 V
C_9	16 + 16 μF	350 V
C_{10}	0.25 μF	250 V
C_{11}	4 μF	250 V
C_{12}	16 + 16 μF	350 V

Miscellaneous:

L1	40 H, 30 mA choke
MR1	250 V, 30 mA rectifier
T1	Stern Radio 653 M.
M1	0-10 volt, a.c. meter*
V1	EF42
V2	EF42
V3	EF42
V4	EF42
V5	EZ41
L2	10 H, 30 mA choke
L3	10 H, 30 mA choke
T2	250-0-250 V, 30 mA, 6.3 V 1.2 A, 6.3 V 1.0 A
Plugs	Belling Lee L715P
Sockets	Belling Lee L715S

Tolerances, unless otherwise stated: Resistors, ± 10 per cent., paper capacitors, ± 20 per cent., electrolytic capacitors, + 50 per cent, — 0 per cent.

* See text; w.w. = wire wound.

to the calibrating circuit must be outside the shield containing V1 and V2. The photograph of the chassis illustrates this point. It will be seen that the chassis is made in two parts. This precise construction need not necessarily be followed, but it is an easy method of ensuring adequate shielding between V1, V2, and V3, V4. The cathode resistances of V1 are carried on a small panel fixed to the range switch, with a shield behind.

The heater leads should be twisted and preferably shielded, and the "humdinger" should be the only earthed point in the heater circuit. Earth leads should be short and preferably close to the socket of the valve in question and, in the interests of low noise and stability of calibration, the resistances in the cathode circuits of V1 and V4 should be wire-wound. As stated before, the accuracy of the instrument is determined principally by the potential divider in the cathode of V1 and the accuracy of the output voltmeter, and the values specified should be obtained to limits of 1 or 2 per cent. Ordinary carbon resistances should not be used, although cracked carbon high-stability or wire-wound resistances are satisfactory. R_8 can be made from a 56-Ω ± 1 per cent and a 6800-Ω ± 5 per cent in parallel.

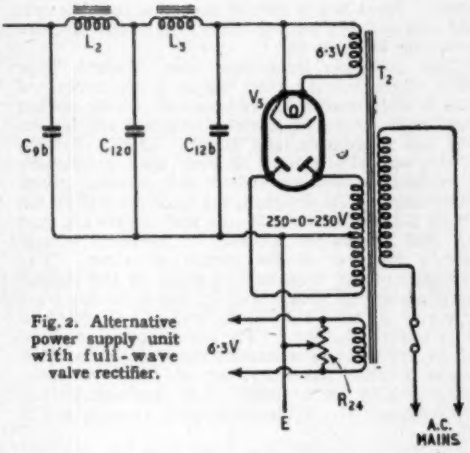

Fig. 2. Alternative power supply unit with full-wave valve rectifier.

Alternative Potential Divider

An alternative to these precision resistances is to use the circuit in Fig. 3. Here ordinary 10-per cent. carbon resistances are used, with wire-wound potential dividers of the values specified. The setting up of this resistance chain should not present any difficulty. The 10,000-Ω variable R_{26} is adjusted so that the total resistance between "N" and "P" is exactly 50,000 Ω. The 2,000-Ω resistance R_{27} is then adjusted to give 4,500 Ω between "P" and "3" on "S1C," the 200 Ω resistance to give 450 Ω between "P" and "4" and the 20-Ω to give 50 Ω between "P" and "5." If these values are set accurately, further readjustments should not be needed for setting up the range scales, but, where possible, the range calibration should be checked by means of an accurate attenuator.



Fig. 3. Ordinary 10-per cent tolerance carbon resistors with series pre-set potential dividers can be used instead of the precision resistors used in the cathode circuit of V1 in Fig. 1.

The input impedance of the amplifier can be considerably reduced if material of high power factor is used for the insulation of the input socket, and this dielectric should consist of, preferably, polythene or high-grade low-loss bakelite. Input terminals should not be used unless the shielding is maintained over the high-potential terminal, otherwise erroneous readings will be obtained because of hum pick-up. It will be seen that the third terminal of the socket is connected through a condenser to the cathode at V1. This will enable double-shielded cable, say Telcon Type K16MYM, to be used, and thus maintain the high input impedance of the voltmeter on the end of, say, 2 or 3 ft. of cable.

The measured input impedance of the amplifier $\omega = (2\pi f) = 10^4$ was 20 MΩ in parallel with 5 pF when connected directly to the 0.01-μF input condenser and $R_1 = 0.56$ MΩ. Increasing R_1 to 1 MΩ increased the input impedance to 33 MΩ with the same input capacitance. A three-pin socket using bakelite insulation reduced the input impedance to 12 MΩ and the input capacitance to 10 pF. Connecting the wafer "S1B" of the range switch to the input further increased the capacitance to 15 pF and reduced the input impedance to 6 MΩ. Substituting a polythene input socket for the bakelite one, and a ceramic wafer in "S1B" gave final values of 75 MΩ and 10.5 pF when $R_1 = 5.6$ MΩ, and 0.15 MΩ and 10 pF when $R_1 = 0.56$ MΩ.

Valve Holders

The above results were obtained when using a mica-loaded polystrene valve socket and with the input coupling condenser freely suspended. It is essential that a low-loss plastic or a ceramic type socket be used for V1, V2 and V3. It has been found that ordinary wood-flour loaded bakelite type sockets give rise to excessive hum. Substituting an SP61 valve for V1 and taking care that the glass envelope is clean round the grid, and making the grid resistance 5.6 MΩ, resulted in an input impedance in excess of 100 MΩ and an input capacitance of 3 pF. From the foregoing it will be seen that if an input impedance in excess of 10 MΩ is required, great care will have to be exercised in the type of materials used in the input circuit of V1. Using a bakelite input socket and 0.56 MΩ grid resistance and connecting a capacitance of 1,000 pF between the grid and cathode of V1, and 1,000 pF between V1 cathode and ground, thus simulating about 25ft of double-shielded cable, resulted in an input impedance of 5.6 MΩ and 60 pF against 5.6 MΩ and 15 pF directly at the valve volt-

meter. From this it will be seen that to all intents and purposes the loading effect of a double-shielded cable may be neglected.

This particular instrument uses Mullard Type EF42 valves, but the valve line up is not critical; a total of 20 instruments have been built during the last three years for use on factory production and laboratory test equipment, and EF50's, EF91's, EF80's, SP41's and SP61's have all been used successfully in various instruments without any material circuit modifications. As designed, the amplifier will be flat within 0.2 db between 20 c/s and 20,000 c/s, and the final calibration accuracy is governed almost entirely by that of the output voltmeter. The measured overall frequency response of this instrument when fed from a 600-Ω source is flat from 20 c/s to 20,000 c/s ± 0.2 db, and is 1 db down at 15 c/s and at 100,000 c/s. The low-frequency response can be improved by increasing the value of the 4 μF output coupling condenser, but an electrolytic condenser should not be used. The measured output impedance at $\omega = 10^4$ is substantially resistive and is 120 Ω.

Although a rectifier type 1,000 ohm/volt, 0–10-V. a.c. meter is specified, any similar type of instrument within reason may be used—say 0–5 V. or 0–20 V., depending on the constructor's requirements, and the instruments he has available—or the unit may be built up solely as a decade amplifier, the output being connected to a universal test set. It should be noted at this point that the meter should not consume more than 2 mA full scale, otherwise the accuracy will be affected at low frequencies due to the reactance of the coupling condenser in the output circuit. A word of warning may be uttered here: that the coupling condensers must be beyond reproach.

TELEVISION AERIALS

Two-Station Reception

WOULD-BE viewers living on the fringe of that segment of the Sutton Coldfield television area which will come within the range of the Holme Moss transmitter are naturally interested in the possibility of using a Channel 2 (Holme Moss) aerial to receive temporarily Channel 4 transmissions from Sutton Coldfield or *vice versa*.

A series of measurements have been carried out by Antiference, Ltd., to establish the difference in vision signal when aerials designed for one channel are used on another, and the figures are given in the accompanying tables.

It will be noted that with certain types of aerial the directivity is reversed and the maximum response is obtained when the reflector element is nearest to the transmitter. This is because the change in wavelength is so large that in the case of Channel 4 aerials the reflector acts more efficiently as a director. In the case of Channel 2 aerials, any director elements work more efficiently as reflectors.

It should be emphasized that the figures given relate only to the vision frequency in each case (Channel 2, 51.75 Mc/s; Channel 4, 61.75 Mc/s). The response of the various arrays over the band for which they are designed is arranged to give full picture definition. The polar diagram is also designed to provide maximum interference reduction. It is also emphasized by Antiference that when aerials are used on an incorrect channel, both bandwidth and polar diagram become greatly inferior, and some loss of both definition and directivity must be expected.

Table 1

Relative response of Channel 4 aerials when used on Channel 2—

Single dipole	− 6.6 db
Reflector and dipole	− 21.7 „
Reflector and dipole reversed	− 11.3 „
"Antex"	− 6.4 „
Reflector, dipole and director	− 16.6 „
Reflector, dipole and director reversed	− 10.9 „

Table 2

Relative response of Channel 2 aerials when used on Channel 4—

Single dipole	− 5.0 db
Reflector and dipole	− 6.5 „
"Antex"	− 15.2 „
"Antex" reversed	− 11.6 „
Reflector, dipole and director	− 17.3 „
Reflector, dipole and director reversed	− 12.6 „

Circular Indoor Aerial

THE unusual shape of the Q5R9 loop television aerial made by The Richard Maurice Equipment Company, of Portsmouth Road, Cobham, Surrey, is not an artistic feature designed to please the eye, but has a definite technical purpose in making the aerial very suitable for indoor reception. It is actually a folded dipole formed into a circle (diameter, 24in London or 19in Midlands) with a 2 to 1 conductor ratio and capacitance loading between the two ends. Apart from the reduction in size and feed impedance achieved by this arrangement, an important feature of the aerial is its marked directivity at right angles to the plane of the loop (unlike a d.f. loop), which, of course, enables interference to be balanced out. It has a figure-of-eight polar diagram and is claimed to have twice the gain of a normal indoor television aerial, permitting reception up to 25-30 miles.

Constructed from aluminium tubing and mounted on a swivel base, the aerial is supplied with 10ft of twin feeder and costs £2 18s.



London model of the Q5R9 aerial.

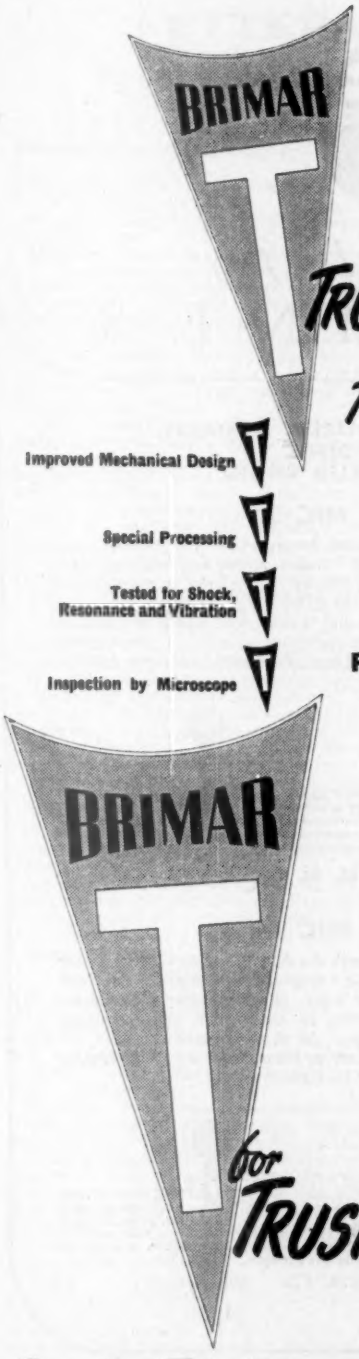

TRUSTWORTHY EQUIVALENTS!

THE FORTHCOMING RANGE of *Brimar* high reliability valves will be subject to rigid control during the whole of their manufacture, and will have a high expectancy of life under arduous conditions. Their nominal characteristics and base connections are identical with those of the existing *Brimar* types which they will replace, and therefore development of new equipment can proceed, using the existing types pending the forthcoming issue of *Brimar* **Trustworthy** types.

RANGE OF TYPES

	Existing type	TRUSTWORTHY equivalent
Octal Base	13D1	6042
B7G Base	6BE6	5750
	6BA6	5749
	8D3	6064
	9D6	6065
	6AT6	6066
	6AL5	6058
	6X4	6063
B9A Base	12AX7	6057
	12AT7	6060
	12AU7	6067
	6BW6	6061
	5763	6062
	6BR7 (8D5)	6059

These type codes have been allocated by the R.T.M.A. Data Bureau, U.S.A.

for TRUSTWORTHY BRIMAR VALVES

Standard Telephones and Cables Limited · FOOTSCRAY · KENT

high fidelity

MICROPHONES

FOR PUBLIC ADDRESS, RECORDING, AMATEUR RADIO

TYPE MIC 22

This model incorporates the famous Acos "Filtercel" insert giving extreme sensitivity and high fidelity. Response is substantially flat from 40-6,000 c.p.s. The microphone is vibration and shock proof and is not affected by low frequency wind noises. Two alternative mountings are available for the MIC 22 head :—

MIC 22-2 is supplied as a complete unit incorporating an attractive desk stand with cable side entry.

MIC 22-1 is for fitting to any British or American type standard floor stand and can also be used as a hand microphone.

PRICE £6. 6s. *(Either Model)*

TYPE MIC 16

Incorporates the Acos Floating Crystal Sound Cell giving a response substantially flat from 30-10,000 c.p.s. Performance is unaffected by vibration or shock and low frequency wind noise. As in the case of the MIC 22, two alternative mountings are available for the MIC 16 head :—

MIC 16-2 is a complete desk stand unit with cable side entry.

MIC 16-1 is ready for fixing to either British or American type floor stands by means of a knurled ring.

PRICE £12. 12s. *(Either Model)*

COSMOCORD LIMITED, ENFIELD, MIDDX.

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents

Broadcasting of Records

IN recent months "Diallist" has been mildly indicting the B.B.C. on two counts:

(a) that an excessive number of gramophone recordings is broadcast, and

(b) many of these recordings are of indifferent quality.

I believe there is a considerable body of opinion against the present excessive employment of recordings; some of the objections have been articulated in the lay press, usually on psychological grounds.

It is apparent that the programme-building authorities have been persuaded that recordings are quite indistinguishable from "live" broadcasts, and that the presence of a recording is not a factor which need weigh in organizing programme layout.

Nothing could be further from the truth. With a high-quality equipment, good to say 12 or 14 kc/s, it is possible to detect, without exception, when a recording is being used, even when the recording is the best which the B.B.C. can achieve. I have also made tests with the co-operation of non-technical friends, and they also have achieved a remarkably high proportion of successes in judging whether or not the programme was recorded. Even with a commercial set of fairly good quality it is possible to detect recordings in nearly all instances.

This detection is not a matter of hypercritical analysis; it is usually only too evident, manifesting itself even to the non-technical listener as "roughness" or "lack of intelligibility." This loss of intelligibility is often quite serious during plays, discussion programmes and the like.

It is not only at higher frequencies that the defections of recordings are evident; with a good low-frequency reproducer I have often found it necessary to insert l.f. attenuation to counteract motor rumble. The transmitted quality of commercial recordings falls far short of what one can achieve in the home.

Finally, let me plead for a greater measure of co-ordination between the artistic and engineering functions in the playing of commercial recordings. Quite frequently we are condemned to listen to bad pressings of recordings when it is known from personal experience that good copies do exist.

Again, we often find that indifferent old recordings of standard works are used when several excellently recorded modern versions are available. I am not impressed by excuses that might be advanced to explain this away.

Singapore. E. JEFFERY.

"*Bass Without Big Baffles*"

WITH reference to the article by K. A. Exley in your April issue, my reaction is that the surest way of producing realism is to render to the ear that which it should naturally hear.

In the old days of short horn loudspeakers, one could readily follow organ pedal passages from the harmonics which filtered through and could even tell when drums were being banged. No one would say that these results were either realistic or pleasant. Organ builders, for many years, have produced 32-ft effects by employing pipes speaking at harmonic pitches, but, as far as I know, it has never been claimed that these are equivalent to the real thing. They are effects which, owing to the harmonics so produced, class themselves into the 32-ft category. A "resultant bass" is often produced by several pipes sounding at harmonic intervals (not in unison, by the way) and the result is a 32-ft subjective effect, but without the "weight" which it would have were the fundamental present. An "acoustic bass" is normally just 2nd and 3rd harmonics only. Certain tones such as trombones, strings and other reeds have little or no fundamental in their make-up, but with tubas, diapasons and flutes a sounding fundamental is necessary. One of the defects of certain makes of electrophonic organs is that the 16-ft basses are practically devoid of fundamental.

The ear is sensitive to difference tones which are innocuous at normal strength; unnatural sub-tones, however, are most disagreeable. With the use of the tempered musical scale the modulation products of two or more notes (other than octaves) would be dissonant.

The circuit given by Dr. Exley, however, is very interesting and worth trying out, as, who knows, a curious pseudo bass may be better than none at all.

The John Compton Organ Co., L. E. A. BOURN.
London, N.W.10.

"*Grouped Component References*"

L. BAINBRIDGE-BELL'S efforts (your March issue) to obtain clearer circuit diagrams are always interesting. With regard to the location-strip method, it may not be known generally that this has been used consistently by Philips and Mullard for a long time. The earliest example known to me is the circuit for the Philips 575A receiver, dated May, 1935. Other firms may have used this method before 1939, but I have not found any examples.

The component references are grouped in three lines: inductors, capacitors, resistors. This emphasis on inductors may seem strange, but somewhere in the Philips design team there has always been a love of inductors (of high degree). These are used to good effect, in greater numbers than in many conventional designs.

The total of inductor references is increased by Philips in another way, which is worthy of general consideration. Every winding is given a separate reference, whether forming part of a tuned circuit, an r.f. or a.f. choke, a power transformer, speaker transformer or speech coil. A tapped secondary of an i.f. transformer is referenced as two inductors in series, thus enabling data in text to be applied to the correct part of the winding without ambiguity. A tapped resistor is dealt with similarly as two or more resistors in series, though in the special case of a carbon track volume control with an additional fixed tapping, the parts are usually referenced, for example, as R9, R9A.

There are thus no circuit references for chokes or transformers as such, and the miscellaneous references are much reduced. In the Philips 575A the inductor references total 40, and the only miscellaneous items are lamps, switches, tuning meter and valves.

In present-day Philips and Mullard data, similar location strips are used for chassis layout diagrams, and with the compact and complex nature of modern designs, these are a great help in identifying small components.

West Mersea, Essex. W. H. O. BANHAM.

Over-Centralization?

I AM a Glaswegian, and I have always thought that Glasgow was as enterprising as any other city. However, I have now to modify my ideas somewhat, in regard to wireless matters.

I intend buying a high-quality amplifier and a tuner unit, such as are advertised in the *Wireless World*, and while all of the manufacturers to whom I have written have provided me with adequate data regarding their

products, reading a pamphlet is an entirely different matter from actually hearing an instrument.

With one exception, I have been unable to find a firm in Glasgow where I can hear any or even one of the well-known high-class amplifiers and/or tuners, whereas I see advertised in your journal shops in London where *all* the above instruments can be heard and compared.

To what then can we attribute this situation? Are the manufacturers themselves to blame for not ensuring that their products are displayed, by suitable agents, in a city as large as Glasgow?

Glasgow, N. L. MACNAUGHTON.

Cathode Follower Circuit

REFERRING to S. H. Finn's letter in the May 1951 issue, I have for the past three years been using a home-built receiver in which the diode detector precedes a cathode follower. The arrangement has all the advantages he describes. In fact, as pointed out in an article by W. T. Cocking in the same issue, the importance of a high ratio of a.c. to d.c. load impedance is often exaggerated, but it is worth while making this ratio as large as possible.

A few other details of the receiver may be of interest. It employs four tuned circuits (500-1,500 kc/s), with two EF50 r.f. amplifier valves, the diode is an EA50, while the cathode follower is another EF50 (triode-connected). The audio frequency amplifier employs a tone control system previously described in *Wireless World* by G. N. Patchett, and the output stage consists of a pair of DA30 valves capable of delivering an output of 25 W to a matched load. The output valves are transformer coupled to the preceding stage (push-pull 6SN7 valves), and a large amount of negative feedback is employed.

I have not bothered to make particular measurements on the receiver. The quality of reproduction is quite reasonable, the selectivity is adequate except sometimes after dark on the Light Programme frequency, while the hum and noise levels are so low as to be quite negligible.

London, S.W.15. F. BUTLER.

Television Licences

THE suggestion of "Free Grid" (your March issue) about gradual payment of the television licence has been practised in Holland for several years.

Every listener has a card with space for 12 stamps, which can be bought at any post office for approximately 2s each. Every month a stamp must be bought and at the end of the year the card should be taken to the post office for renewal. M. J. J. BRONS.

Southsea, Hants.

A.M. and F.M. in Mobile Services

I WOULD like to comment on two letters in your recent issues.

In a previous letter I pointed out that Major Armstrong's statement that f.m. was universal in mobile services was not correct. I pointed out that f.m. was anything but universal in the land mobile field in Great Britain, that it was not universal in the marine mobile field, and that, on the contrary, a.m. was universal in the air mobile field.

In defence, Major Armstrong says that his original statement was addressed to the American reader, and dealt with conditions in the U.S.A. The statement did not make this clear, and it did not confine itself, as it should have done, to the land mobile field in the U.S.A.

I can only express my surprise that it did not occur to either Major Armstrong or to the editor of *Tele-Tech* that the statement would be widely read, and, consequently, misinterpreted in countries other than the United States.

H. N. Gant in his letter (your March issue) has not given the correct reason for the overwhelming predominance of a.m. in the mobile field in Britain. At least two leading British manufacturers have been offering mobile f.m. in the home market for the past five years. If the advantages of the system are to take longer than this to assert themselves, they must, in my opinion, be rather obscure. Over that period f.m. has had every opportunity to prove its virtues to the hundreds of users who have demanded and received competitive trials. I do not know of any such demonstration where a.m. had the advantage of higher power. Contrary to what Mr. Gant says, a.m. has been slightly cheaper than the equivalent f.m., but I do not think that price has been a main factor.

I would conclude by assuring him that my firm does not screen vehicle wiring in a.m. installations. One suppressor is sufficient. J. R. BRINKLEY.

Pye, Ltd.,
Cambridge.

What is a Polar Diagram?

IN your March issue on page 105 appears a graph with the caption "Polar diagram of radiation." This, strange to say, is plotted in Cartesian co-ordinates with decibels as ordinates and abscissæ as angles.

May I protest against this indifference to the meaning of words? A polar diagram is plotted by setting out radial distances from a *pole* (whence the name): It does *not* mean any type of graph in which the independent variable is an angle.

L. BAINBRIDGE-BELL.

Haslemere, Surrey.

"*Thermal Soldering Shunt*"

REFERRING to P. F. Duncan's article in your February issue, I always use an old jeweller's trick for localizing the heat and stopping it from running up the connecting wire. A radial slit is made in a slice of potato, and the slit is passed over the wire. I have even done brazing by this method. JOSEPH CLEGG.

Woodford Green, Essex.

Television Picture Quality

G. H. BALL raises, in his letter in the March issue of *Wireless World*, an interesting point. I can support his view that the link to Sutton Coldfield is not to be blamed, for there is a high incidence of poor picture quality here in the London area.

The explanation appears to be simply one of poor signal-to-noise ratio in the cameras and the apparatus immediately associated with them. In this district there is such a strong signal available that it is child's play to keep receiver noise off the screen. Nevertheless, high noise levels are often visible, and these come and go as cameras are changed in the course of programme presentation. What other explanation can there be?

It seems also that the camera amplifier channels at the A.P. studios are generally more noisy than those in the O.B. equipment, although why this should be is not apparent. It cannot be argued that the O.B. gear is cleaner because it is more modern; the signal from Lime Grove is often very poor.

An even more pronounced comparison is often possible when the programme is faded from camera to film-scanner. Mr. Ball may be able to make some interesting observations by comparing the average quality of film transmissions with direct presentations. He can take it for granted that film transmissions are generally of good quality, after making allowance for unsuitable subject matter. G. L. STEPHENS.

Enfield, Middx.

How to Choose a Valve

The Revealing Story Told by a Single Characteristic

By THOMAS RODDAM

SIX times a week, and twice on Sundays, for the last thirty years, someone, somewhere, has introduced a new type of valve. The designers of wide-band amplifiers have attempted to deal with this vast variety by introducing a factor of merit based on the mutual conductance and the capacitances. By the use of this factor of merit the designer can say that valve A is better than valve B. At very high frequencies a new factor, the noise resistance, appears to be the most suitable criterion. The audio designer is left to choose his valves by intuition. In this article I shall point out the merits of two different figures of merit for use by audio designers.

It is, of course, time that the designer is not confronted by the possibility of using any one of the thousand odd valves listed in the valve books. The valves are already classified and sub-classified. Foreign customers, for example, often demand that valves of American type should be used: they say that replacements to fit the new Welsh nine-pin octal are difficult to find in their local suppliers. The use of miniatures makes them think that they really are getting an up-to-date design. Standardization of heater supplies makes it necessary to keep to the 6.3-volt valves except in the most abnormal circumstances. But finally we are faced with the problem of internal standardization: if sections of a complete system are designed by different people, it looks better if the final equipment uses one valve type for one function. We must have our domestic standard. In deciding this from the short list of, perhaps, half-a-dozen valves, the figure of merit can be invaluable.

Very often, the final choice is a matter of chance. The man who is quickest off the mark announces that he is committed to such and such a valve: the man with the loudest voice overrides the discussion: the only type which happens to be available in the local shop is used, because no one wants to wait while an order goes through. But if a single factor of merit can be used to assess the claims of the different valves, there is just a hope that the best type will be chosen.

Characterizing Curve

The basis on which we can best work is the use of a single curve which characterizes the valve, instead of the set of characteristics which are usually used. This set, of course, really represents a three-dimensional surface, and there are quite real difficulties in appreciating the full significance of the normal characteristics. The single curve conveys its meaning much more directly: for some reason, however, the standard text-books seem to have overlooked its merits.

In the discussion of the figure of merit it will be assumed that we are concerned mainly with pentodes. I am fully aware of the advantages of using positive feedback triode pairs, but the problem of type selection is not so acute here, because there is not really a wide range of choice. The pentode valve characteristic can be written in the form

$$I_a = I_o + Ae_g + Be_g^2 + Ce_g^3 + \ldots \quad (1)$$

where I_a is the anode current, I_o the steady component with no signal applied, and e_g the alternating component of the grid voltage. A, B, C etc., are parameters which are fixed by the valve construction.

Differentiating this equation, we have

$$dI_a/de_g = A + 2Be_g + 3Ce_g^2 \quad .. \quad .. \quad (2)$$

which goes to

$dI_a/de_g = A$ if e_g is made small enough. This means that A is simply the mutual conductance of the valve. Let us plot a graph of mutual conductance against grid bias. We can measure this ourselves, and some valve manufacturers give us this graph for some of their valves. Such a graph is shown in Fig. 1. Since $g_m = dI_a/de_g$, we can write

$$I_a = \int_{-\infty}^{e_{g0}} g_m de_g \quad .. \quad .. \quad .. \quad (3)$$

$= I_{a0}$ the current at some bias e_{g0}. The integral of eq. (3) is the area under the $g_m - e_g$ curve, which is shown shaded in Fig. 1. The single curve of Fig. 1 thus tells us both the standing current and the mutual conductance at any particular bias.

Going back to equation (2), we can differentiate again, and we have

$$\frac{dg_m}{de_g} = 2B$$

This is the slope of the curve shown in Fig. 1, and it is actually a measure of the second harmonic dis-

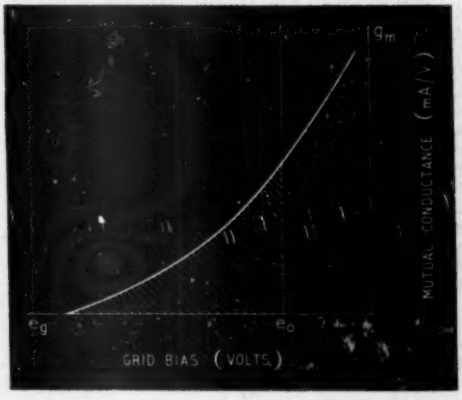

Fig. 1. The basic valve characteristic, showing mutual conductance as a function of bias. The shaded area is the anode current.

Fig. 2. The slope of the characteristic is specified by g and is a measure of the second harmonic.

Fig. 3. Characteristics of three pentodes, showing linear $g_m - e_g$ characteristic for 6BH6 and parabolic characteristics, 6AK5 and 6J7.

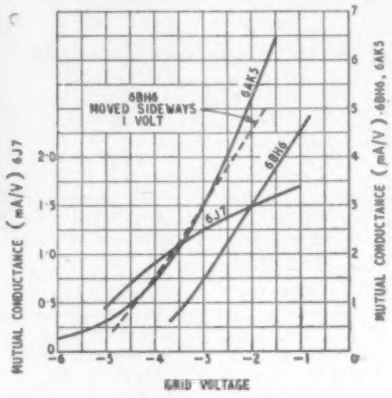



Fig. 4. The sag of a curved characteristic is a measure of the third harmonic distortion.

tortion. We can see this by putting $e_g = e \sin \omega t$ so that

$$I_a = I_o + g_m e \sin \omega t + Be^2 \sin^2 \omega t \ldots$$

$$= I_o + g_m e \sin \omega t + \frac{Be^2}{2}(1 - \cos 2\omega t) \ldots$$

The second harmonic distortion is therefore

$$\frac{Be^2}{2g_m e} = 100\% = \frac{B}{2g_m} \cdot e \cdot 100\%$$

Looking at Fig. 2, we see that $B = g/2e$, as B is the slope of the $g_m - e_g$ characteristic: putting g_o for the value of the mutual conductance at the working point, the distortion is

$$(g/4g_o) \cdot 100\%$$

From the single curve of $g_m - e_g$ we can therefore derive the following information.

(1) The mutual conductance, and thus the gain, at any particular working point. This is read straight off the curve.

(2) The anode current. This is the area under the curve, and can be obtained by counting squares, or by any other convenient method of graphical integration, such as a planimeter.

(3) The second harmonic distortion for a given working level, or the working level for given distortion. This is given by reading off g_o and g from the graph, and calculating $(g/4g_o) \cdot 100\%$.

If the valve $g_m - e_g$ characteristic is a straight line, we need only concern ourselves with the second harmonic distortion, because the factor C in equation (1), which is a measure of the third harmonic, will be zero. Two types for which this is true are the 6BH6 and the 6AG7. We shall not use $(g/4g_o)$ as a figure of merit, however, for reasons which must be discussed. Provided that the designer is sufficiently skilful, the distortion can be reduced by the use of negative feedback, and the price to be paid is in the gain of the system. The gain reduction and the distortion reduction are directly proportional, so that the important quantity for the audio designer is

(gain)/(distortion).

This is clearly proportional to $g_o/(g/4g_o)$, and dropping the factor 4 we have as a figure of merit the quantity g_o^2/g.

The *best* valve to use in an audio amplifier is the valve which has the highest value of (g_o^2/g), provided that gain and distortion are the criteria of choice. To indicate how we can make use of this rule, the characteristics of three different pentodes, the 6AK5, 6BH6 and 6J7 are plotted in Fig. 3. If we consider these valves for low-level applications, we can tabulate the values of g_o and g for a peak swing of 0.25 volts. We have:

	g for $e = 0.25$	g_o	Fig. of merit	I_o
6AK5	1.3	5.8	26	9
6BH6	0.75	3.35	15.2	4.5
6J7	0.125	1.5	18	3.3

It will be seen that the 6AK5 is the best of the three, and that the 6J7, in spite of its low mutual conductance, is better than the 6BH6. Unfortunately, as any critical reader can check for himself, I have not been quite fair here. The curves shown are published characteristics, and they apply for different supply voltages. It is, however, not necessary to make the comparison under identical conditions, because if we get better results from the 6AK5 at 180 volts (the maximum) than from the 6BH6 at 300 volts, we shall choose this valve.

Sometimes we have other requirements for our valve. We may say that all the distortion occurs in the output stage, and demand only high gain in the previous stages. Then, of course, g_o is the factor which decides which valve we are to use. For the designer who really wants the best possible result, however, this is only part of the story, because he can add positive feedback to the early stages, and it is easy to see that with the design worked out for the best performance, the figure of merit already quoted is the one to use. With the increasing demand for miniaturization, another criterion may be needed: we may want to get as much gain as possible for each milliamp of anode current. It is necessary to take account of the tail which appears in some valves, and to compare the characteristics closely. By shifting the 6BH6 characteristic sideways in Fig. 3,

it can be seen that the 6AK5 has a longer tail, and so will take rather more anode current for the same gain. It is much more difficult to provide a single figure of merit for this application, because the relative merits of two valves may differ as the working level is altered. The $g_m - e_g$ characteristic, however, contains the complete story.

Some valves, of course, have a curved $g_m - e_g$ characteristic. The simplest form of this is shown in Fig. 4. This parabolic characteristic is due to the fact that the coefficient C in equation (1) is not zero. The result in practice is that there is a third harmonic term in the distortion. I am not going to work out the distortion in detail, because the mathematics is quite straightforward, but I will just quote the results. The third harmonic for any peak level is obtained by joining the two points on the curve corresponding to the maximum working peak level, $(e_o \pm e_p)$. The dip of the curve below the straight line, measured at e_o, is δ, and is a measure of the third harmonic. For any signal peak level e_s less than e_p, the third harmonic is given by the formula

$$\frac{3\delta}{g_o} \cdot \left(\frac{e_s}{e_p}\right)^2 \cdot 100\%$$

When $e_s = e_p$, this reduces to $3\delta/g_o$ .100% which may be compared with the expression for the second harmonic, $g/4g_o$ .100%. Which harmonic dominates depends on whether δ is greater than $g/12$. It is easy to test this on any particular characteristic.

The reader who wishes to apply this method of assessing valves will encounter one very serious difficulty. Some valve makers consider it sufficient to announce that Venus valves are Versatile, and support this claim with a photograph of an attractive young lady—the same one who uses a well-known soap, eats chocolate and drives the most expensive motor cars. True, engineers, unlike editors, like these pictures, but we are also interested in the anatomy of the valves and would like to see some of their curves too. In theory the $g_m - e_g$ characteristic can be derived from the ordinary $I_a - E_a$ characteristics, but if you look at Fig. 5 you will see that this does not seem to be a very reliable method. The only ways out of this are, either measure the characteristics yourself, using

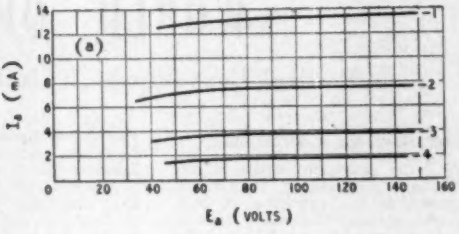



Fig. 5. Characteristics of 6AK5, showing failure of agreement in data.

methods given in the standard text-books, or say to the maker, "no tell, no buy." Even after all these years I still cherish the hope that one day we shall have a uniform base and numbering system: but by then we shall probably all be using transistors instead.

To sum up what I have said, the most useful single valve characteristic is the mutual conductance-grid bias curve, and from this we can immediately determine the anode current, the stage gain and the distortion. To compare two valves for audio amplifier service we can make use of a figure of merit which is easily calculated.

STEREOPHONIC SOUND

Demonstration in the Telekinema

A THREE-CHANNEL system has been adopted for the demonstration of stereophonic sound in the Telekinema. Reproduction is through the main B.T.H. sound film installation and separate loudspeaker units have been placed at right, left and centre of the stage. Magnetic tape is the recording medium, and a special machine has been developed in conjunction with E.M.I. for use with stock 35mm. film base, which has been coated with oxide. In addition to the three tracks for the main groups of speakers, there is a fourth track for special effects from loudspeakers at the back of the hall.

The use of wide film has brought many problems not associated with standard 0.25in. tape. Pressure pads are necessary on each of the recording, replay and wipe heads, and heavy Mumetal screening has been provided to prevent ingress of hum into the comparatively large volume of the recording head assembly.

Pre-emphasis and complementary de-emphasis of high frequencies to a law equivalent to a circuit time constant of 40μsec has been adopted. The figures given for the final overall frequency response are 30c/s to 15kc/s; signal/noise ratio is 55 to 60db, and total harmonic distortion less than 2 per cent.

The microphone used for recording stereophonic sound is of the twin ribbon type in which the ribbons are mounted at 90 degrees to each other in a common magnetic field. Each ribbon has a figure-of-eight polar diagram and the relative amplitudes of the signal in each channel are determined by the position of the source. Cross talk between the two channels is less than -45db and has been found to be quite satisfactory.

WORLD OF WIRELESS

Festival Conventions : Notes and News : Personalities

Engineering Conference

AT the afternoon session of the Joint Engineering Conference, arranged by the Institutions of Civil, Mechanical and Electrical Engineers (June 4th to 15th), on June 8th, Sir Noel Ashridge will speak on "The British Television Service." At the telecommunications session at 10.0 on June 11th Sir Stanley Angwin will be the speaker. "Radio Masts and Towers" is the subject to be dealt with by C. O. Boyse at 10.0 on June 12th. These three meetings will be held at the I.E.E., Savoy Place, London, W.C.2.

At an alternative meeting on June 12th at 10.0 at the Institution of Mechanical Engineers, Storey's Gate, London, S.W.1, Air Comdre. C. S. Cadell and Dr. B. J. O'Kane will speak on "Forty Years' Progress in Air Radio."

During the conference visits will be made by delegates to a number of works, research establishments, etc., including E.M.I. Factories, N.P.L., Alexandra Palace, S.T.C., G.E.C., G.P.O. Radio Terminal, and B.B.C. Lime Grove Studios.

Details of the conference, which is open to members of the three convening institutions and of certain other institutions and societies, are obtainable from the Secretariat, Institution of Civil Engineers, Great George Street, London, S.W.1.

Brit. I.R.E Convention

THE first two of the six sessions of the Convention being organized by the British Institution of Radio Engineers during the period of the Festival of Britain will be held at University College, Gower Street, London, W.C.1, from July 3rd to 6th.

The first two days will be devoted to "Electronic Instrumentation in Nucleonics," and the chairman will be Dr. Denis Taylor, of A.E.R.E., Harwell. Seven papers will be presented.

"Valve Technology and Manufacture" is the subject being covered at the second session (July 5th and 6th), at which J. W. Ridgeway (Edison Swan Electric Co.) will be the chairman. The papers to be read include:—

"Triode Amplifiers in the Frequency Range 100 Mc/s to 450 Mc/s," by D. C. Rogers (S.T.C.).
"Aluminium-Backed Screens for Cathode-ray Tubes," by R. W. Dudding, B.Sc. (G.E.C.).
"Dynamic Measurements on Receiving Valves," by A. J. Heins van der Ven (Mullard).
"Rare Metals in Electron Tubes," by D. A. Wright, M.Sc. (G. E. C.).
"A Survey of Quality and Reliability Standards in Electronic Valves for Service Equipment," by G. L. Hunt, B.Sc. (Ministry of Supply).
"The Production of Miniature Valves in France," by M. Martinoff (Société Française Radio-Electrique).
"The Application of Image Converters to High-speed Photography," by J. A. Jenkins, M.A. (Hons.), and R. A. Chippendale, B.Sc. (Mullard).
"Vacuum Technique: Its Application to Radio and Electronics," by D. Latham, B.Sc., and B. D. Power, B.A. (W. Edwards and Co.).
"Line Scanning Valves and Circuits," by B. Eastwood, B.Sc., and C. C. Vodden, M.Sc. (Edison Swan).

Further details of the Convention, which is open to non-members, are obtainable from the General Secretary, Brit. I.R.E., 9, Bedford Square, London, W.C.1. The registration fee for each session is 10s 6d.

Indian "Beveridge"?

PLANS for the International Radio and Electronics Exhibition of India, mentioned in our last issue, have been carried a stage further by a proposal for an "Asian Conference on Broadcasting" to coincide with the exhibition. By Western standards, Asia is very poorly served, and the purpose of the conference is to examine technical and organizational possibilities for extending broadcasting throughout the Continent.

Y. A. Fazalbhoy and his associated organizers of the Indian Exhibition, who have been discussing their plans with various bodies in this country and elsewhere in Europe, are returning to England on May 29th and will be staying at the Savoy Hotel, London, W.C.2.

Indexes

THE index to the 1950 volume of *Wireless World* is now available from our Publisher, price 1s (postage 2d). Cloth binding cases for the volume are also obtainable, with index, price 6s 5d by post. The binding of readers' own issues can be undertaken by our Publisher; the cost, including binding case and index, being 17s 6d, plus 9d for the postage on the bound volume.

Readers may like to know that copies of the 1950 index to the Abstracts and References section of our sister journal *Wireless Engineer* are still available. The author and subject sections cover the 3,221 abstracts published in *Wireless Engineer* during last year. The index, which costs 2s 8d by post, also includes a list giving the names and addresses of the 160 journals of the world regularly scanned for abstracting.

SOUTH BANK SOUND SYSTEM. Four 1.5-kW amplifiers, seen in the background, are used in the Rediffusion sound system at the South Bank Exhibition. Pre-selection of groups of the 700 loudspeakers in the various buildings and open spaces is provided by the switch buttons on the illuminated map at the control position.

Amateur Television

A TELEVISION Convention is to be held by the British Amateur Television Club on June 23rd from 10 a.m. to 6 p.m. at the Cinematograph Exhibitors' Association, 164, Shaftesbury Avenue, London, W.C.2. The morning session will be devoted to a discussion of transmitting standards, licensing, etc., and the afternoon to demonstrations of equipment. A charge will be made for admission. Particulars are obtainable from the Hon. Sec.: M. Barlow, 8, Primrose Street, Cambridge.

The date of the Convention coincides with the R.S.G.B. National Convention (to be held from June 21st to 24th—see April issue) and has been chosen to enable interested amateurs to attend both functions.

DR. T. L. ECKERSLEY, B.Sc., F.R.S., who, owing to illness, was unable to travel to London, received the Faraday Medal from the President of the I.E.E. at a private ceremony at the Marconi Works, Chelmsford.

Television Bandwidth

THE main objection to the adoption of a high-definition television system, such as that introduced in France, has been the very wide bandwidth required (14 Mc/s). It has been suggested by the Editor of our French contemporary *La Télévision Française* that so long as there is good vertical definition unbroken by the line structure and good contrast, viewers are content. It is of interest, therefore, to note that regular test transmissions of 819-line television from the "low-definition" Eiffel Tower transmitter, which operates on 46 Mc/s and has a pass band of about 4 Mc/s, are being undertaken by Radiodiffusion Française.

PERSONALITIES

Sir Stanley Angwin, K.B.E., who, as announced in our April issue, relinquished the chairmanship of Cable and Wireless, Ltd., to act as technical adviser to the Commonwealth Telecommunications Board, has now been appointed chairman of the Board. Before his appointment in 1947 as chairman of Cable and Wireless, Ltd., Sir Stanley was for eight years Engineer-in-Chief of the Post Office. He is also chairman of the Radio Research Board.

A. H. Mumford, O.B.E., B.Sc. (Eng.), M.I.E.E., has been appointed Assistant Engineer-in-Chief G.P.O., on the retirement of Capt. J. Legg. He joined the Post Office Engineering Dept. as a probationary assistant engineer in 1924 and by successive promotions took charge of the Radio Branch in 1938.

C. Buckle, A.M.I.E.E., has been appointed Engineer-in-Charge of the television station now being built at Holme Moss. He joined the staff at Alexandra Palace in 1938, and became successively Engineer-in-Charge of the broadcasting stations at Blackburn and Middlesbrough when the television service closed down in 1939. He was appointed to the staff of the Corporation's Engineering Training Department as an Instructor on transmitters in 1944. Mr. Buckle's Assistant at Holme Moss will be **J. P. Broadbent**, who is at present one of the senior engineers at the Droitwich transmitting station.

W. J. Chalk, B.A., has joined the staff of the Overseas and Engineering Information Department of the B.B.C. to deal mainly with the allocation of wavelengths for broadcasting, and to take part in international and other conferences on this and related subjects. During the war he held staff appointments as Radio Planning Officer for Special Forces Signals in the Middle East, Europe, and the Far East, and was a member of various frequency allocation committees.

L. W. Turner, A.M.I.E.E., has been appointed Assistant Head of the Engineering Services Group of the B.B.C. He joined the Corporation in 1936 from the International Marine Radio Co. In 1949 he was seconded to the Colonial Office in order to carry out a broadcasting survey of the West African colonies.

IN BRIEF

Receiving Licences current in the United Kingdom at the end of March totalled 12,403,950, including 763,750 television licences. Our contributor, "Free Grid," who recently pleaded for the introduction of some means whereby licences could be purchased by weekly instalments will be interested to learn that the P.M.G. has pointed out that the Stamps Saving Scheme allows money to be accumulated in small amounts for encashment later.

Television Society. — A Summer Meeting for members of the Society will be held at the Norwood Technical College on June 2nd. A demonstration of large screen television will be given at the Penge Cinema during the morning and in the afternoon a series of short papers will be read.

Telearchic Lighthouses.—The possibility of controlling remotely situated lighthouses by radio is well demonstrated at the South Bank Exhibition by the lighthouse on the Shot Tower, which is automatically switched on and off from a distance of three miles. A 5-watt v.h.f. transmitter is installed at the St. James's Square offices of Chance Brothers, who made the lighthouse, and a four-element Yagi aerial on the roof directs a coded signal to the Shot Tower when the equipment is operated by a time-switch. All the radio equipment is supplied by Marconi's.

"Radio Valve Data."—A new and up-to-date edition of this useful reference book will shortly be available from our Publisher. Although it has been completely revised and enlarged and now includes characteristics of some 2,000 valves and cathode-ray tubes, the book is still priced 3s 6d (postage 3d).

Williamson Amplifier.—Copies of the reprint of the articles describing the Williamson Amplifier, which has attained international repute, are again available and may be purchased from booksellers, price 3s 6d, or, in cases

(*Concluded at bottom of next page*)

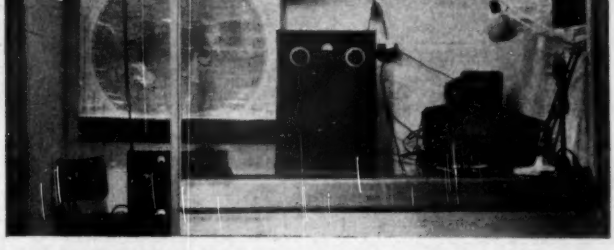

AMATEUR RADIO STATION at the Land Travel Exhibition which, after visiting Manchester in May, will be in Leeds from June 23rd to July 14th. The transmitter was provided by Webb's Radio and the aerial equipment by Belling & Lee. A Cosmocord crystal microphone is used.

Television Relay Systems

Distributing Programmes by Wire

TWO companies are now operating television relay systems in conjunction with the ordinary sound relays. The methods used by each are alike in their essentials and in both four audio-frequency channels are provided, the distribution being along a quad cable at audio-frequency. One of these four channels carries the television sound signal and the other three give the Light, Home and Third programmes.

The television signal is superimposed on the same wires using carrier frequency. The attenuation of such cable at this carrier frequency is naturally fairly heavy, but it is claimed that up to a mile can be used before a repeater becomes necessary.

In the case of the system installed by Link Sound & Vision Services Ltd. at Gloucester, the receiving station is some three miles outside the town on high ground and the signal is conveyed to the distribution point over a centimetre-wave relay link. A metre-wave receiver, also installed at this distribution point, plays a double role; it provides a check on the operation of the link and it acts as a stand-by so that a service can be provided from it in the event of a failure of the link. Reception, whether direct or via the relay link, is from Sutton Coldfield.

Each subscriber has a television unit which includes the cathode-ray tube, scanning and e.h.t. circuits, and a video receiver designed for the carrier-frequency employed. It is, of course, somewhat simpler than the ordinary television receiver in that the conventional sound channel at radio-frequency is unnecessary, as are also sound-channel rejectors and interference-suppression circuits. The sound side is the purely a.f. circuit of the conventional relay system. Provision is made in the design for the distribution of a second picture programme should this ever become necessary.

At Margate the aerial array of Central Rediffusion Services' installation is outside the town on an open site and is supported by a 60-ft mast. The receiver has five r.f. stages and five i.f. and the first stage is a low-noise earthed-grid triode. The output signal at a level of about 2 V is carried by 2,000yd of quad cable to a repeater station where an amplifier compensates for the line attenuation. From this repeater the signal is distributed to subscribers and, when the service is extended, it will feed further repeaters.

The signal is received from Alexandra Palace and is stated to vary from about 15 μV to 150 μV according to propagation conditions. An a.g.c. system will consequently be fitted to the receiver.

(Right) Rediffusion aerial system at Margate.

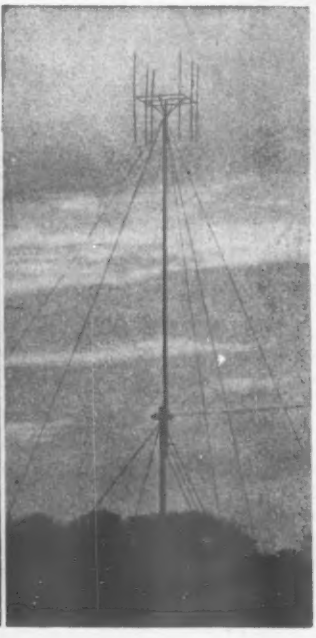

(Below) Control desk of the Link installation at Gloucester.

World of Wireless . . . . . concluded

of difficulty, by post from our Publisher, price 3s 9d.

"R.S.G.B. Call Book."—The Radio Society of Great Britain has decided to publish a book under this title giving the call signs, names and addresses of all licensed amateurs in the United Kingdom. Amateurs wishing to have particulars of their stations in the first edition, to be published towards the end of the year, are asked to write their call sign, name and address on a postcard and send it to J. P. P. Tyndall, 174, The Drive, Ilford, Essex.

South Bank Radar.—The harbour supervision radar equipment in use in the Transport Pavilion at the South Bank Exhibition, which includes a 12-ft scanner mounted on a boom extending from one corner of the building, was supplied by Cossor Radar, Ltd.

THE "BELLING-LEE" PAGE

Providing technical information, service and advice in relation to our products and the suppression of electrical interference



To avoid confusion with our accepted list numbers, the above and subsequent conversion kits for new stations will be identified by the channel number (Holme Moss—Channel 2) and a letter suffix, i.e., A, B, C, D, E.—thus 2/A; 2/B, etc.

NOTE:—For "Multiwel" conversions to simple dipole or "H" a piece of L.686 semi-air-spaced coaxial cable with "Belling-Lee" plug L.734/P should be used to replace the ¼-wave transformer.

EXISTING AERIAL	CONVERSION REQUIREMENT			
Sutton Coldfield Channel 4	For simple Dipole	For 1/2 wave "H"	For Loewe "H"	For "Multiwel"
L.822/A/C or L.822/W	Description below	Description below		
L.822/A/C or L.822/W	2 Dipole Elements, Insulator, Screws & Plug for cross-arm	2 Elements with 1/2 wave crossover, Insulator and Screws	2 Elements and 1/2 - wave cross-arm, Insulator and Screws	
Multiwel L.822/A/A L.822/A/C	As above, but with round-end arm	Description above	Description above	Complete Multiwel kit

Prices of Conversion Kits Holme Moss (Channel 2)

Readers of this page will recall our announcement in the "Wireless World" March this year regarding conversion kits for converting existing Sutton Coldfield aerials to Holme Moss frequency.

We are now able to state that the prices of these will be as follows:

Kit 2/A	List Price	**24/6**
Kit 2/B	List Price	**32/6**
Kit 2/C	List Price	**45/-**
Kit 2/D	List Price	**52/6**
Kit 2/E	List Price	**136/-**

See above illustration.

It Was Not a Deliberate Mistake

We would like to thank those who took the trouble to ring us up pointing out the slip we made in the April issue of the "Wireless World." Many gave their names, many preferred not to do so. The subject was "What is a dipole," where we emphasised that the term "dipole" should not be applied to an "H" type aerial. Earlier in the page we illustrated a horizontal dipole and reflector, headed "Horizontal Dipoles"! It only goes to show!

Impartial Booklet on Aerials

This booklet, entitled "Television Aerials—Outdoor or Indoor" issued jointly by R.E.C.M.F. and B.R.E.M.A., has a foreword which reads as follows:

"This booklet is intended primarily for the benefit of municipal authorities and other property owners whose judgment their tenants may have to accept for the choice of television aerial they may employ.

Compiled by experts with long experience of aerial installation work, it is hoped the information contained herein will facilitate a clearer understanding of this subject."

We are often called upon to act as impartial adjudicators in the frequently occurring "Landlord and Tenant" disputes, which from time to time find their way into our postbag; letters which request assistance in disputes with landlords and councils, who regard with the utmost suspicion all types of chimney mounted aerials, or, if they agree to the erection of these, insist on stipulating the height of the pole regardless of location, and insist on double lashings, in the mistaken idea that these are essential to safety in every case. All in direct contradiction of normal installation practice.

Our reply to such letters is generally on the following lines:—



"Dear Sirs,

Television Aerials.

We thank you for your letter dated..... The enclosed booklet, published by the Industry, should help to dispel doubts as to the safety of aerials (see page 12).

Normally aerials are safe with a single lashing, if the poles do not exceed nine foot. Over nine foot most firms supply double lashings.

Where no pole is supplied, i.e. cross-arm, mast cap, elements and lashings, double lashings are supplied on the assumption that a longer mast will be used.

We have no record of any damage of the kind suggested.

All 'Belling-Lee' aerials are engineered to withstand repeated gusts of 80 m.p.h., which is a harder test than wind of constant velocity.

There may be black sheep in the industry, but in general television aerials are a credit to their manufacturers. A few years ago a run along the South Coast would have shown only 'Belling-Lee' aerials standing up to the severe conditions, but only within the last few weeks the writer commented on the fact that on the South Coast there was quite a variety of makes of television aerials all looking as well as such an erection can look.

We will gladly help you further if you feel disposed to put other questions."

Should you feel that this booklet may prove helpful to you, please write for publication P.373/W.W.

Ignition Interference Suppression

The greatest single obstacle to the full development of television in the "fringe" and built-up areas is the interference resulting from unsuppressed motor vehicles.

Road haulage and passenger transport organisations, large industrial concerns, and some motor car manufacturers, have all co-operated nobly in the voluntary suppression campaign.

It would still appear that the most difficult road users to persuade are the private owner and the tradesman. Although in this respect the two main motoring organisations are doing magnificent work.

We have suggested to dealers that they approach their business neighbour, the garage proprietor, in this vital matter, with a view to obtaining the suppression of most vehicles garaged in their locality.

The successful marketing of ignition suppressors, which have admittedly a low turnover value from the dealer's point of view, may ultimately result in further sales by him of T.V. receivers; units of £50 upwards.

To further this aim, the colourful "Belling-Lee" suppressor showcard was introduced, holding 24 suppressors L.630. Ideal for point-of-sale advertising on garage service counters, in showcases and window displays.

BELLING & LEE LTD

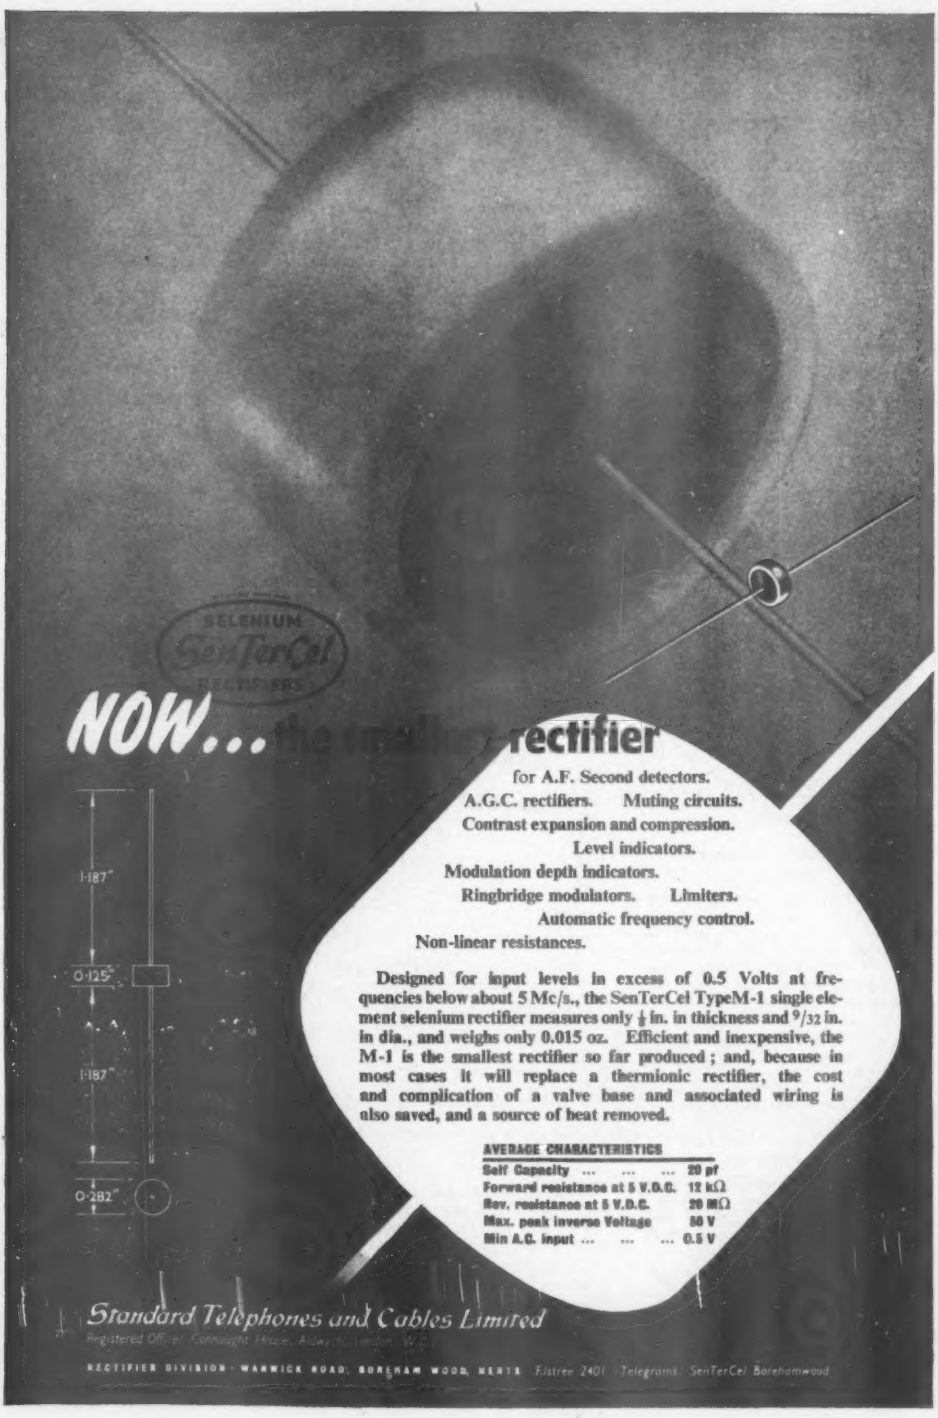

NOW... the smallest rectifier

for A.F. Second detectors.
A.G.C. rectifiers. Muting circuits.
Contrast expansion and compression.
Level indicators.
Modulation depth indicators.
Ringbridge modulators. Limiters.
Automatic frequency control.
Non-linear resistances.

Designed for input levels in excess of 0.5 Volts at frequencies below about 5 Mc/s., the SenTerCel TypeM-1 single element selenium rectifier measures only $\frac{1}{8}$ in. in thickness and $^{9}/_{32}$ in. in dia., and weighs only 0.015 oz. Efficient and inexpensive, the M-1 is the smallest rectifier so far produced; and, because in most cases it will replace a thermionic rectifier, the cost and complication of a valve base and associated wiring is also saved, and a source of heat removed.

AVERAGE CHARACTERISTICS	
Self Capacity	20 pf
Forward resistance at 5 V.D.C.	12 kΩ
Rev. resistance at 5 V.D.C.	20 MΩ
Max. peak inverse Voltage	50 V
Min A.C. input	0.5 V

Standard Telephones and Cables Limited
Registered Office: Connaught House, Aldwych, London, W.C.2
RECTIFIER DIVISION · WARWICK ROAD, BOREHAM WOOD, HERTS Elstree 2401 · Telegrams: SenTerCel Borehamwood

Gramophone Turntable Speeds

What is the Best Speed for Microgroove Recording?

By G. F. DUTTON,* Ph.D., D.I.C., A.M.I.E.E.

THE history of the disc gramophone shows that there has been a great variety of turntable speeds and of groove dimensions. The early discs were of about 7in to 8in in diameter and it will be shown later that the turntable speed of about 78 r.p.m. was justified at that time. The groove dimensions and amplitude of cut were dictated by the need for direct mechanical reproduction through a horn system. The development of the more delicate electrical pickup mechanisms has naturally changed these requirements, but mechanical gramophones are still used by many people throughout the world. A very important aspect of the gramophone record was its universality. Except for slight variations of frequency characteristics a record made in this country could be played wherever there was a pickup or a portable gramophone. The introduction into the commercial market of the microgroove and at least two alternative speeds robs the disc of its universal application.

It has been stated on good authority that of the sales of the standard 78-r.p.m. records throughout the world, 40 to 50 per cent go to customers who have the portable mechanical type of machine only. It is also interesting to note that though the number of portable mechanical gramophones exported from this country greatly exceeds the home consumption, the latter has shown a distinct rise since the end of the war. The U.S.A., being a highly electrified country, has no mechanical gramophone problem. It is to be expected, therefore, that a firm in the U.S.A. can embark on new standards of speed and groove dimensions with less embarrassment than firms in this country.

It must be clear, therefore, that whatever alternative speeds and groove dimensions are eventually adopted, the standard 78-r.p.m. record must continue for a considerable time.

The playing of a gramophone record is a very personal form of entertainment; one has the choice of a number of artists performing any one work and one can play it when one likes. Perhaps the mention of the broadcast programme called "Desert Island Discs" will illustrate the personal choice of a variety of short items together with the portable gramophone angle. I presume that the desert island is not electrified.

We should perhaps at this stage state the specification for the performance of a gramophone disc. There is no doubt, however, that it will be the public who will finally choose the specification, but we may usefully list what we think to be the items which could be discussed here on technical grounds. Before we do that we should bear in mind that the buying public can, I suggest, be roughly divided into two age groups —14 to 30 and 50 to 70. The first group, 14 to 30, is the romantic group, requiring dance music, hot jazz, crooning, etc., with a fair demand for the more serious classical music. They have little money to spend and probably prefer to spend only a little at a time. The second age group, 50 to 70, is the connoisseur group with more money to spend and more time to listen to long operatic works. One age group would tend to sway the gramophone industry to concentrate on short five-minute records and the other to adopt long-playing records. The use of long-playing records to string together whole series of dance tunes would, I think, be ridiculous. It is difficult enough, with the 10-in, 78-r.p.m. record, to choose suitable coupling items for the two sides of the disc. I must also mention that there are many lengthy classical works covering, say, a dozen 12-in discs, and the sales of one or two discs from the series far exceeds the sale of the complete work.

Record Materials

It would seem, therefore, that the record of short duration, say up to five minutes, is a definite requirement. Does the standard 78-r.p.m. record fulfil the requirements of a short-duration record? To a large extent it certainly does, but we must consider whether the size of the record player, the storage of records, the economical use of low surface noise and high-grade plastic moulding material are items which would swing the development towards small diameter lower-speed discs. Shellac is an ideal resin for moulding, since it flows freely at a moderate moulding temperature and pressure. Its great drawback is its dimensional instability without the use of a large percentage of mineral filler. This filler is the cause of most of the so-called surface noise. The record, however, stands up well to the variable treatment that it may experience by reason of the great variety of needles and pickup playing pressures used throughout the world.

The unfilled vinyl co-polymer resins can only be used with safety by the modern lightweight pickup with precision needle points. The plastic is expensive, and, like most high molecular weight resins, requires high moulding temperatures and pressures. This in its turn is liable to cause strain which may lead to warping. When using vinyl plastic, therefore, the small disc is to be preferred.

Can long playing be fulfilled by the 78-r.p.m. standard disc? History shows that there have been many attempts and some quite successful. For instance, the World Record Company in 1910 brought out a disc claiming to play from 10 to 100 minutes employing a constant groove speed. A sample record is extant which plays for 12 minutes, the turntable speed varying from 30 r.p.m. on the outside to 80 r.p.m. on the inside. The use of constant groove speed is the most

* E.M.I. Engineering Development, Ltd.

efficient way of operating a disc, since the quality can be kept constant at a predetermined value. The mechanism to produce this constant groove speed and at the same time avoid "wow" and "flutter" is something of a mechanical problem.

The 33⅓ r.p.m. speed was introduced for 16in discs to be used in conjunction with films. With these large-diameter discs 33⅓ r.p.m. is justified. In recent years it has been used by broadcasting concerns both for processed transcription records and for lacquer recordings. The groove dimensions are the same as for 78-r.p.m. standard. The 16in disc is, of course, too large for domestic use. If we examine Fig. 1 we see a family of curves showing the relation between playing time and disc speed for various overall diameters. The minimum groove speed is 16in/sec and there are 100 grooves per inch.

The playing time of a record is determined by the width of the recorded area on the record, the spacing between individual grooves, and the angular speed of the turntable. The average groove spacing depends very largely on groove width, which in turn is controlled by the size of the needle point, and to a slightly lesser degree on the amplitude of the recording cut. The turntable speed and the total width of recording allowed are related together by considerations which involve the overall diameter of the record and the least permissible tangential groove speed; the latter depends in turn on the same two quantities, that is to say the needle size and the amplitude of cut, which are involved in groove spacing. Since these two features control playing time in two distinct ways, they merit the first consideration.

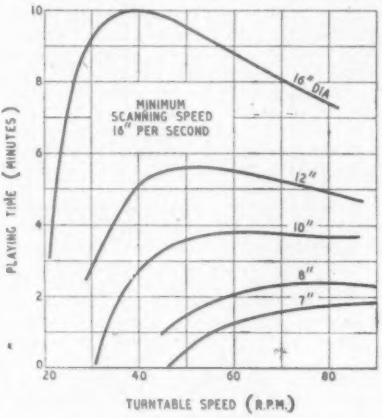

Fig. 1. For a given minimum groove speed there is an optimum turntable speed for maximum playing time with any given outside diameter of record.

Fig. 2. Principal groove dimensions in microgroove recording.



For use on microgroove records, the radius of the hemispherical tip of the needle has been reduced from the value of 0.0025in, associated with standard records, to 0.001in. To avoid excessive wear or major damage to either the needle or the record, it has been necessary to reduce the needle pressure and stiffness by at least the square of this ratio. This has been achieved partly by reducing the mass of the pickup head, and partly by some degree of counterbalancing: further reduction of needle pressure would almost inevitably have to be achieved by increased counterbalancing alone.

If the radius of the needle point were reduced below the new figure of 0.001in,

(a) the uniformity of performance between needles would deteriorate seriously,

(b) the needle tip would be too susceptible to accidental damage,

(c) the counterbalancing would become critical and would involve individual adjustment, and

(d) the ratio of the residual moment to the moment of inertia would be so low that the needle might fail to maintain proper contact with records which are slightly warped.

In all proposed microgroove records, the amplitude of the lateral cut has been reduced in, at least, the ratio of the needle-tip reduction, at the lower frequencies, which determine the greatest amplitude. Further decrease would not give a proportionate increase in playing time, particularly if the groove pitch is made variable. On the other hand, with pre-emphasis the amplitude of cut at high frequencies is only slightly below the standard (78 r.p.m.) records.

Fig. 2 shows the dimensions of cross-section of the groove. The best position for the needle to engage the groove wall is half-way up the wall where there is the least danger of distortion of the wall by rounding. It will be clear from Fig 3 that the width of the needle at the point of engagement is 0.0014in and that the absolute minimum groove spacing is, in consequence, 0.0028in. In extremely quiet passages, a record could theoretically be cut to 350 grooves to the



Above: Fig. 3. Using the groove of Fig. 2, the theoretical minimum spacing without modulation is 0.0028in (about 350 grooves per inch). In practice an average of 250 g.p.i. is rarely exceeded.



Left: Fig. 4. For a given stylus radius and lateral velocity of cut, distortion is inversely proportional to the fourth power of the tangential (linear) groove speed.

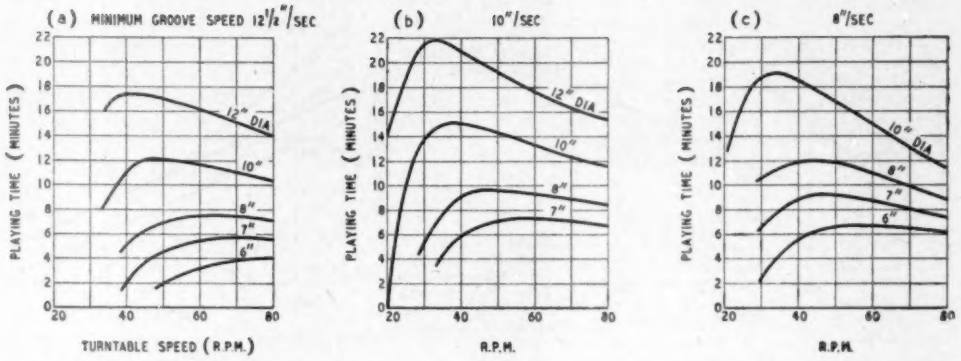

Above: Fig. 5. Playing time, for 250 grooves per inch, in terms of minimum groove speed, external diameter of disc and turntable speed.

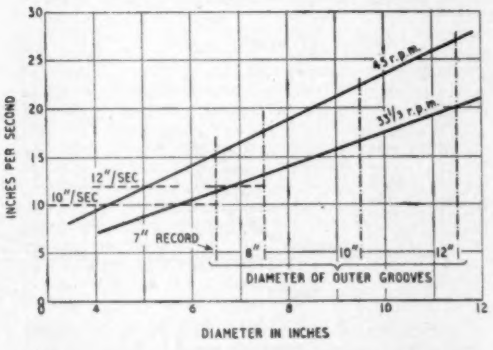

Right: Fig. 6. Relationship between linear groove speed and groove diameter.

inch, but in practice an extra tolerance has to be allowed to ensure that grooves do not cut into one another. An allowance for this effect leads to a groove-to-groove minimum spacing of 0.0035in, and a maximum of 280 grooves per inch in silent and fairly quiet passages. Heavy recording will require an increase of spacing of at least 0.0015in, making 0.005in in all, but, as loud passages do not in general predominate, it is thought that a variable groove-pitch system would allow an average of 250 grooves per inch. All the following calculations of playing time are made on this assumption.

The distortions which arise in following a groove with a needle point of finite size have been analysed in detail by Pierce and Hunt[1], Lewis and Hunt[2], and others. Briefly, the expression for distortion contains terms of the form:

$$\frac{r^2 V^2}{S^4}$$

where r is the needle-tip radius, V is the lateral cut velocity, and S is the tangential velocity. This means that, in order to produce similar distortion conditions S^3 varies directly with rV.

In considering harmonic distortion of lower frequencies, or intermodulation between low and high frequencies, both r and V have been reduced by 2.5 to 1 from their values with standard records, and hence the minimum tangential speed may be reduced in the same ratio for the same amount of distortion. Harmonic distortion of high-frequency notes, or intermodulation between high notes, however, involve values of V which are unchanged from the standard record, and here a reduction of S in the ratio of the square root of 2.5, or only about 1.6, is justified. Taking into account the importance of the various types of distortion, it is probable that the permissible decrease of tangential velocity, from that of the standard record, is in the ratio of 2 to 1.

Existing standard 78-r.p.m. records in extreme cases play to a tangential velocity as low as 16 inches per second, and distortion is apparent at the inner grooves, if the amplitude of cut is high. In fact the quality in loud passages is not noticeably impaired at 22 inches per second. On this basis we should recommend that microgroove records should preferably be terminated at 12 inches per second, and certainly never allowed to play beyond 10 inches per second.

Experience has shown that the distortion which sets in at a certain point in the playing of the record, increases at a rate which appears to be out of all proportion to the change of radius. It cannot be too strongly emphasized that this is completely justified in theory by its dependence on the reciprocal of the fourth power of the speed. Similarly, we are quite justified in drawing a strong distinction between speeds differing as little as 12in and 10in per second, because this small difference accounts for more than a two-fold increase of distortion. This is illustrated in Fig. 4.

Playing Time

On the assumption of an average of 250 grooves per inch, the playing time can be calculated for various sizes of record, minimum groove velocities, and turntable speeds. From Fig. 5 it will be seen that for each record size and minimum groove velocity there is actually an optimum turntable speed; at this speed the outermost groove is played at twice the minimum groove velocity, and the music occupies just one half

[1] *J. Acous. Soc. Amer.* Vol. 10, July, 1938.
[2] *J. Acous. Soc. Amer.* Vol. 12, January, 1941.

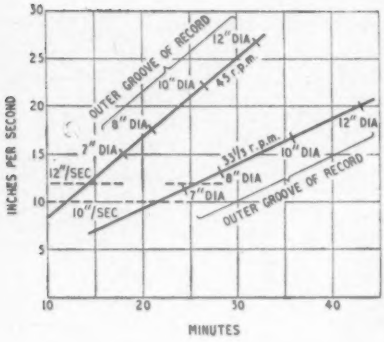

Left : Fig. 7. Groove speed as a function of time, with zero time at the centre of the record.

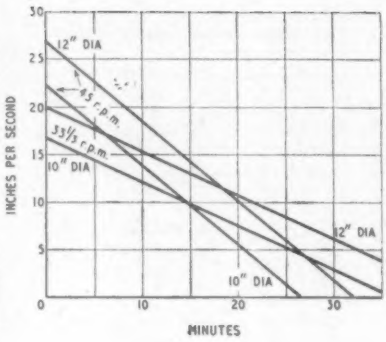

Right : Fig. 8. Data for 10in and 12in discs replotted from Fig. 7 with zero time at start of outer groove.

Below : Fig. 9. Limitation of playing time by distortion at the inside groove diameter for discs of 12in, 10in and 7in. external diameter at alternative turntable speeds.

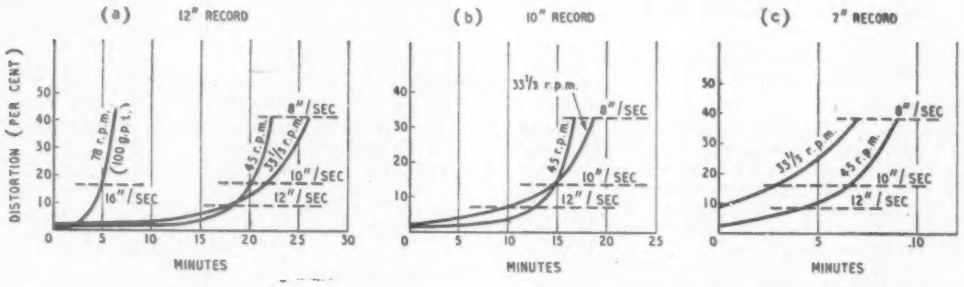

of the radius of the record. The curve of playing time plotted against turntable speed is, however, very flat near its maximum and change of speed by 20 per cent in either direction from the optimum only results in reducing the playing time by 4 per cent from the maximum. For this reason, it is only necessary to consider the two figures of 33⅓ r.p.m. and 45 r.p.m. which have already been adopted: if the optimum for any given set of conditions falls centrally between these two, no great loss can arise from adopting either.

It is obvious that linear speed, which has a marked effect on quality, is greater at the starting groove of a record turning at 45 r.p.m. than on one of the same diameter turning at 33⅓ r.p.m., but equally clear that, as the needle moves into the centre more rapidly in the faster record, the linear speed falls off more rapidly. Actually, there is a time at which the two records, started at the same instant, will be moving at the same linear groove speed and, after this point, the record which is rotating at only 33⅓ r.p.m. will actually have the higher linear speed and therefore give the better quality. This critical point occurs at about 15 and 18 minutes from the start on 10in and 12in records respectively, and occurs at linear speeds of about 9½ and 11½ inches per second.

In Fig. 6, the variation of groove velocity is plotted against the diameter of the groove which is being played. The diameter of the inner groove is given by the intersection of the appropriate line with the limiting groove velocity chosen: from this the useful area of the record can be deduced. In Fig. 7, the tangential speed is plotted against time, and as a matter of convenience, zero is the time when the needle reaches the axis of the record. To compare the performance at the two speeds for a particular outer groove diameter, the curves are shifted laterally to align the points corresponding to the outer groove diameters, and the zero is shifted to this actual starting point. The pairs of lines corresponding to 12in and 10in records resulting from this operation are shown in Fig. 8, and indicate the critical points already mentioned. Graphs of this kind have been used, in conjunction with the inverse fourth power conversion, to calculate the curves of distortion for various record diameters shown in Fig. 9. In each case, the starting groove is taken as having a diameter half an inch less than the nominal outside diameter of the record.

Summarizing, it can be stated that:

(a) 12in records can be played at either 33⅓ or 45 r.p.m. with good quality to 18 minutes. At 45 r.p.m. the 10 inches per second limit is reached at just over 20 minutes: at 33⅓ r.p.m. this limit is extended nearly to 22 minutes. The rise of distortion is illustrated in Fig. 9(a).

(b) 10in records can, in the extreme, be played to 14½ minutes at either speed, but the last 4 minutes of playing will have noticeably better quality on the 45-r.p.m. record. The lower distortion in the latter case is indicated in Fig. 9(b).

(c) For smaller records, the higher turntable speed is unquestionably better: by this means popular 5-minute recordings can be made comfortably on 7in discs. The advantage is clearly shown in Fig. 9(c).

In deducing the minimum groove velocity we have tacitly assumed that the techniques of recording and

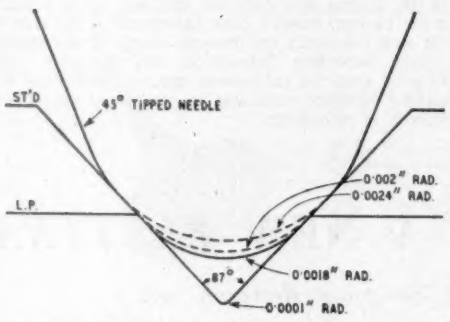

Fig. 10. Standard and microgroove sections superimposed with needle tips of different radii.

processing have kept pace with the reduction of needle size. Results already achieved show that this is in fact possible, but the process requires an increase in skill and supervision, and adds considerably to the production difficulties.

If the choice of turntable speeds were completely free, it would still be difficult to arrive at a definite optimum, because the relative commercial importance of short and long recordings exerts so much control on the choice.

It is impracticable to use the optimum speed where the record is smaller than 8in, because this, after allowing for a run-off groove, would leave an inadequate label diameter. For an 8in record, the optimum varies from 60 r.p.m. to 50 r.p.m. according to the quality permitted. The higher speed should be deprecated, however, partly because it allows no margin for squeezing a little more on to a record (which is quite justifiable where the record ends with a quiet passage), and partly because it is very uneconomical for 12in records. The highest speed that should be considered is therefore 50 r.p.m.

At the other end of the scale, the optimum for 12in records varies from 40 r.p.m. to 33⅓ r.p.m. according to quality, but the loss due to using 40 r.p.m. is, in any case, small. The range of choice therefore lies between 40 r.p.m. and 50 r.p.m. It should be biased to one end or the other of this range according to the relative importance of large and small records respectively.

The Use of Universal Needles

In this report no account has been taken of the American proposals for truncated or other universal needles, although we appreciate the practical convenience of such a needle. Most recording companies are now cutting the 78 r.p.m. type of record with a radius at the bottom of the groove of 0.001in, but it must be remembered that there are a large number of records in circulation which have a bottom radius of at least 0.002in. A universal needle will not necessarily ride on the straight walls of a groove unless the width at the points of engagement is less than 0.0024in (for microgroove records) and simultaneously greater than 0.0028in (for the older 78 r.p.m. records). It follows that, in one case or other, the needle will ride on surfaces which are not accurately controlled, and noisy results will be obtained. These points will be clear from an inspection of Fig. 10.

Apart from this noise, a needle with a tip of radius 0.002in, playing a microgroove record, will give four times the tracing distortion of the standard (0.001in radius) microgroove needle.

An elliptical cross-section point with a small radius of curvature at the contact edge would reduce the distortion, but with a principal radius of 0.002in would contact the microgroove at the shoulder, which is not desirable.

I would like to thank Mr. R. E. Spencer for collaboration in its preparation.

FREQUENCY TEST RECORDS

Calibration Methods Discussed by the B.S.R.A.

IN the past, standard test records have been taken more or less for granted as the basis for comparison of pickup performances. The use of vinyl plastic materials for pressing new test records has, however, shed some doubt on the validity of many earlier assumptions, and to ventilate the matter thoroughly, a discussion was held in London on March 16th by the British Sound Recording Association.

In opening the discussion, H. Davis, M. Eng., M.I.E.E. pointed out that the voltage output from the terminals of a pickup represented the performance of the combined system of pickup and record. When a record groove is traced by a spherical stylus tip, the pressure at the point contact is theoretically infinite; in practice some deformation of the groove wall always takes place until the contact area is sufficient to reach equilibrium. One consequence of this deformation is that a compliance is added to the equivalent mechanical circuit of the system, and the top resonance frequency is usually lowered. In addition to deformation due to the weight of the pickup head, there is the driving force working against the mechanical impedance at the needle point. This force could be very high, and at high frequencies accelerations of the order of 100*g* were possible, even though the groove deflections were small.

Unless mechanical impedances were known to be negligibly small, it would be better to specify a pickup by a family of curves taken in a variety of test record materials and to say that the performance lies within these limits.

In the discussion which followed, various basic methods of measuring the depth of modulation were discussed, including microscopic examination (difficult at high frequencies where amplitudes may be as small as 10^{-6}in); exploration at low speed with light stylus pressure and a displacement micrometer; measurement of voltage output from a pickup at the resonance frequency of the armature and its supporting compliance where mechanical impedance is a minimum, the speed of the turntable being varied inversely as the nominal frequency (working at one frequency eliminates the pickup characteristic); and the Buchmann and Meyer optical reflection method. Several

speakers underlined the importance of adhering to the basic conditions of this test which was applicable only to sine waves and required parallel light from a narrow source. From experience one speaker suggested a single-filament motor lamp bulb at 5 or 6ft, and an observing telescope of small aperture.

Comparison of results obtained by Buchmann and Meyer images and electrical methods, using a high-grade pickup, showed close agreement in the case of the new frequency test records issued by the British Sound Recording Association, and members were satisfied that the calibration figures represented the highest accuracy attainable in measuring the lateral velocity of recording.

A NEW *ELETTRA*

Sea-going Research and Demonstration Yacht

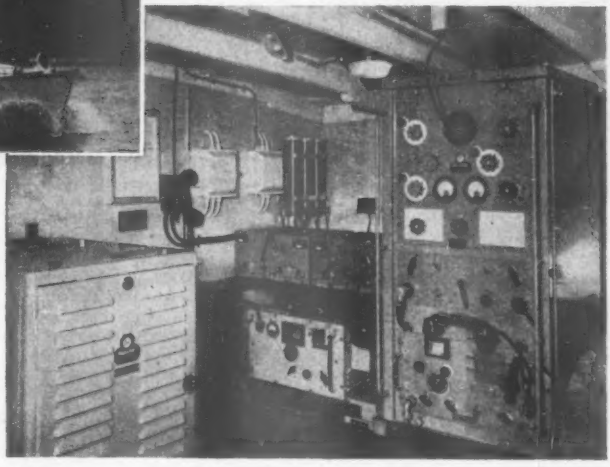

Marconi Marine research and demonstration yacht "*Elettra II*."

"Transarctic" transmitter - receiver (right) "Seaphone" v.h.f. and "Oceanic" sound reproducing equipment (centre) and transmitter cabinet of "Radiolocator IV" radar (left) as installed in the forward saloon.

TO perpetuate the name of *Elettra*—Marchese Marconi's famous steam yacht in which many of his early experiments with short waves were carried out—the Marconi International Marine Communication Company have put into commission a new diesel-engined yacht, *Elettra II*, which, in addition to providing similar facilities for original experimental work at sea, will also serve as a floating showroom for the latest Marconi Marine equipment.

The new vessel, which was built by J. Samuel White and Company of Cowes, is 72ft overall and is driven by twin Gardner diesel engines each rated at 150 h.p. The cruising range at 10 knots is 1500 miles.

Standard radio equipment at present carried by *Elettra II* includes the "Mercury" long- and medium-wave, and "Electra" medium- and short-wave marine communication receivers, conforming to G.P.O. specifications for ships' general-purpose receivers, "Lodestone" direction finder for the 550-1200 metre range, "Transarctic" telephone/telegraph transmitter/receiver, "Seaphone" v.h.f. radiotelephone transmitter receivers (one for use with the Thames telephone link via Monarch exchange and the other for communication with the Marconi Marine Company's East Ham Depot.)

Radar is represented by the latest "Radiolocator IV" in which the display unit is carried in a compact trunnion mounting for fixing in any of the usually required positions on board ship. An interesting feature of this equipment is that pulse length is automatically varied by the range switch, giving 1 μsec for the long ranges (up to 40 miles) and 0.2 μsec for greater discrimination at short ranges (minimum one mile). The aerial scanner incorporates a built-in performance monitor, and extensive facilities are provided for checking working conditions by means of plug-in meters. The main transmitter cabinet also contains a small c.r. tube for observing all essential waveforms in various parts of the equipment.

Echo-sounding gear is also carried, the permanent installation being the "Seagraph" recording echometer. A new visual depth indicator working on the principle of a rotating arm carrying a flashing neon bulb is undergoing trials and will shortly be put into production. It will be known as the "Visette" and will have a range up to 130 fathoms, suitable for the needs of inshore fishermen and others requiring soundings inside the 100-fathom line.

It is a tribute to the compactness of design that all this equipment has been tucked away in this comparatively small ship, without unduly restricting living accommodation or the amenities offered to visitors. *Elettra II* will be at Oslo during the conference of the international association of radio marine operating companies and has a full programme of visits to other ports on the Continent and this country.

HIGH QUALITY REPRODUCTION

"FIFTY and THIRTY WATT" CINEMA AMPLIFIERS as illustrated for single or double P.E.C. input with separate adjustable bias. Full range of tone controls to suit all needs with built-in Exciter Supply if required. PRICES range from **34½ gns.** to **42½ gns.**





TYPE C.P. 20A AMPLIFIER

For AC Mains and 12 volt working giving 15 watts output, has switch change-over from AC to DC and "Stand-by" positions. Consumes only 5½ amperes from 12 volt battery. Fitted with mu-metal shielded microphone transformer for 15 ohm microphone, provision for crystal or moving iron pick-up with tone control for bass and top. Outputs for 7.5 and 15 ohms. Complete in steel case with valves.

PRICE **£28 . 0 . 0.**

FOUR-WAY ELECTRONIC MIXER

This unit has 4 built-in balanced and screened microphone transformers, normally of 50-30 ohms impedance. It has 5 valves and selenium rectifier supplied by its own built-in screened power pack consumption 20 watts. Suitable for recording and dubbing, or large P.A. Installations since it will drive up to six of our 50 watts amplifiers whose base dimensions it matches. The standard model has an output impedance of 20,000 ohms or less and any impedance can be supplied to order. PRICE **£24 . 0 . 0.**



OTHER MODELS IN OUR RANGE OF AMPLIFIERS

"SUPER-FIFTY WATT" - - - - - PRICE **36½ gns.**
"THIRTY WATT" - - - - - - - „ **30½ gns.**
"10-15 WATT RECORD REPRODUCER" „ **25½ gns.**

These are fitted in well ventilated steel cases with recessed controls, as illustrated.

Full details upon request.
EXPORT ENQUIRIES INVITED.

VORTEXION LIMITED, 257-261 THE BROADWAY, WIMBLEDON, LONDON, S.W.19

Telephones: LIB 2814 and 6242-3 Telegrams: "Vortexion, Wimble, London."

DO NOT FAIL TO VISIT STAND
No. G256
AT THE NATIONAL RADIO EXHIBITION
WHERE OUR ALL-BAKELITE CABINET PATENT CONE LOUD SPEAKER WILL BE SHOWN FOR THE FIRST TIME
ALL-BAKELITE CABINET MODEL, £4 . 4 . 0
OAK CABINET MODEL, £3 . 0 . 0
JUNIOR MODEL, SUITABLE FOR PORTABLE OR SELF-CONTAINED SETS. £2 . 10 . 0
THE W.B. ANTI-PHONIC LOW-LOSS VALVE HOLDERS.
REDUCED PRICES WITH TERMINALS. 1/9
WITH SOLDERING TAGS ONLY 1/6
Supplied by all good-class dealers from stock. Or in case of difficulty write to the Makers.
Manufactured and Guaranteed by
WHITELEY, BOHEHAM & CO., Ltd.
NOTTINGHAM ROAD, MANSFIELD, NOTTS.

Reproduced from "Wireless World" September 28th, 1927.

25 YEARS OF MAKING FRIENDS

We have just celebrated our Silver Jubilee, and can look back with pride and pleasure over twenty-five years friendly association with the Trade, and through them, with the public.

We like making friends, and the fact that so many "Stentorian" users take the trouble to write us is naturally very gratifying. These extracts from letters received recently are typical:

"This particular W/B 10" loudspeaker was purchased during 1928 and continues to give excellent service".

"If my Duplex Speaker gives me as good service as my old W/B 36S model purchased about 14 years ago and still giving good results I shall be more than satisfied".

"... one of your Speakers which I purchased in 1931. After 20 years of continuous use it is today as fine in tone and performance as the day I bought it".

Verb. sap!

W/B Stentorian

The finest EXTRA Speaker for any set

WHITELEY ELECTRICAL RADIO CO. LTD · MANSFIELD · NOTTS

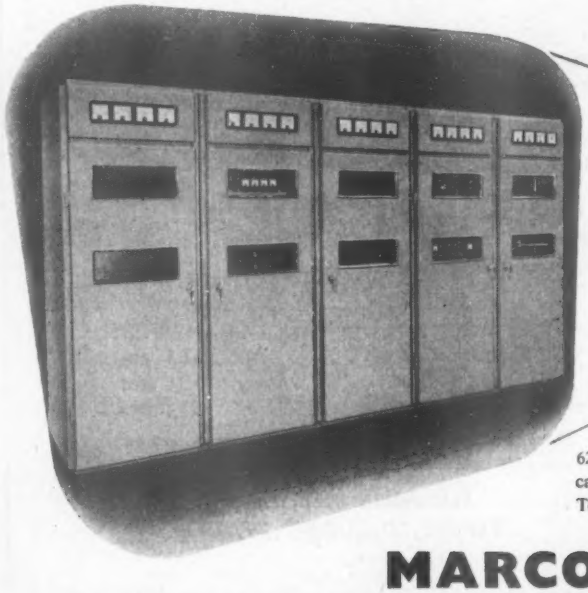

LINKS
CAMERAS
TRANSMITTERS
AERIALS
STUDIOS

5 kW vision transmitter suitable for definitions up to the International 625 standard. Used by the British Broadcasting Corporation at their Holme Moss Television Transmitting Station.

MARCONI television

Made by MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED, CHELMSFORD, ESSEX

—the only British firm to make complete equipment for television transmission

Intermodulation Testing

Some Pitfalls of "Simplified" Routine Methods

By E. W. BERTH-JONES,* B.Sc.

IN recent years the conviction has grown that the most important single factor in the assessment of the quality of audio-frequency apparatus is the absence of what is often called "non-linearity distortion," "amplitude distortion," or "harmonic distortion." A curve may be plotted for the apparatus of instantaneous output against the instantaneous value of the input producing it. In the case of a purely electrical device, such as an amplifier for instance, this could represent instantaneous output voltage versus instantaneous input voltage. If this graph is a perfectly straight line over the working range, then the equipment is distortionless; but if it departs from a straight line, then distortion is introduced, hence the term "non-linearity distortion." The amplification (or loss) of the equipment under test is given by the slope of the graph, and if this is a curved line, the slope (and thus the amplification) changes with the amplitude of the applied signal. From this effect the term "amplitude distortion" is derived.

The curve itself may be expressed as a power series of the form :—

$$y = a + bx + cx^2 + dx^3 + ex^4 + \ldots \text{ (to infinity)} \quad (1)$$

where y is the instantaneous output voltage, x is the instantaneous input voltage, and a, b, c, etc., are numerical coefficients. If these coefficients are correctly estimated, and the graph of the above expression is drawn, it will coincide exactly with the curve derived from the apparatus. However, their exact assessment is so tedious in most cases, that the exercise is not recommended. If we wish to know what happens to the output waveform when a sine wave is applied to the input, we must replace the "x" in the series by some expression defining the input wave, such as :—

$$x = \mathrm{A} \cos \omega t \quad (2)$$

(The cosine wave is chosen rather than the sine, simply because it makes the mathematics rather simpler. As everyone knows, the two waves have the same shape, so it is immaterial which we choose for analysis.)

The output voltage e_0 is equal to y, and the graph of the output waveform against time is obtained by substituting equation (2) in equation (1), thus :—

$$e_0 = y = a + b\mathrm{A} \cos \omega t + c\mathrm{A}^2 \cos^2 \omega t + d\mathrm{A}^3 \cos^3 \omega t + e\mathrm{A}^4 \cos^4 \omega t + \ldots \quad (3)$$

By means of well-known identities, which any good trigonometry book will prove to the satisfaction of one and all, the quantities $\cos^2 \omega t$, $\cos^3 \omega t$, etc., may be expressed in terms of $\cos 2\omega t$, $\cos 3\omega t$, and so on, which are waves at twice, three times, etc., the frequency of the original wave, and are known as the second, third, and higher harmonics.

Making the necessary substitutions in equation (3) gives a somewhat lengthy expression which may be simplified by collecting together all the coefficients of $\cos \omega t$, $\cos 2\omega t$, etc., and which then reduces to the form :—

$$e_0 = (a + \tfrac{1}{2}c\mathrm{A}^2 + \tfrac{3}{8}e\mathrm{A}^4) + (b\mathrm{A} + \tfrac{3}{4}d\mathrm{A}^3) \cos \omega t + (\tfrac{1}{2}c\mathrm{A}^2 + \tfrac{1}{2}e\mathrm{A}^4) \cos 2\omega t + (\tfrac{1}{4}d\mathrm{A}^3) \cos 3\omega t + (\tfrac{1}{8}e\mathrm{A}^4) \cos 4\omega t + \ldots \quad (4)$$

The first term is a constant, independent of $\cos \omega t$. This represents a direct current, and is normally filtered out from the output by a blocking condenser or transformer, so it is of no further interest here.

The second term is the fundamental, at the original frequency, and succeeding terms are second, third, etc., harmonics. An interesting point to note is that even-order harmonics derive entirely from even powers of "x," and odd harmonics entirely from odd powers.

Two-tone Testing

A parallel effect becomes significant when we come to consider intermodulation distortion. In order to measure the intermodulation distortion of a piece of apparatus, it is necessary to introduce into the input two tones of different frequencies, f_1 and f_2. If there is any distortion present, we shall obtain from the output the original two frequencies, and in addition certain spurious tones which were not present at the input. These tones are the harmonics of f_1 and f_2, and others which are generally said to occur at frequencies equal to the sum and difference of f_1 and f_2. It might be worth while to investigate this statement to see if it is invariably true.

In the interest of simplicity in this example, the fourth and all higher powers of "x" in the power series

TABLE 1

Expansion of the first four terms of the power series $y = a + bx + cx^2 + dx^3 + \ldots$ when $x = \mathrm{B} \cos \omega_1 t + \mathrm{C} \cos \omega_2 t$

$e_0 = a + \frac{1}{2}\,c\mathrm{B}^2 + \frac{1}{2}\,c\mathrm{C}^2$ (direct current term)
$+ (b\mathrm{B} + \frac{3}{4}\,d\mathrm{B}^3 + \frac{3}{2}\,d\mathrm{BC}^2) \cos \omega_1 t$ $+ (b\mathrm{C} + \frac{3}{4}\,d\mathrm{C}^3 + \frac{3}{2}\,d\mathrm{B}^2\mathrm{C}) \cos \omega_2 t$ } (fundamental terms)
$+ \frac{1}{2}\,c\mathrm{B}^2 \cos 2\omega_1 t$ $+ \frac{1}{2}\,c\mathrm{C}^2 \cos 2\omega_2 t$ } (second harmonic terms)
$+ \frac{1}{4}\,d\mathrm{B}^3 \cos 3\omega_1 t$ $+ \frac{1}{4}\,d\mathrm{C}^3 \cos 3\omega_2 t$ } (third harmonic terms)
$+ c\mathrm{BC} \cos(\omega_1 + \omega_2)t$ $+ c\mathrm{BC} \cos(\omega_1 - \omega_2)t$ $+ \frac{3}{4}\,d\mathrm{BC}^2 \cos(\omega_1 + 2\omega_2)t$ $+ \frac{3}{4}\,d\mathrm{BC}^2 \cos(\omega_1 - 2\omega_2)t$ $+ \frac{3}{4}\,d\mathrm{B}^2\mathrm{C} \cos(2\omega_1 + \omega_2)t$ $+ \frac{3}{4}\,d\mathrm{B}^2\mathrm{C} \cos(2\omega_1 - \omega_2)t$ + higher order terms. } (intermodulation terms)

* E.M.I. Studios Ltd.

may be omitted, and since the input now consists of two tones, we must write :—

$$x = B \cos \omega_1 t + C \cos \omega_2 t \quad .. \quad .. \quad .. \quad (5)$$

where $B + C = A$ of equation (2).

Since the two waves are, in the general case, of different frequency and not multiples one of the other, they will eventually come into phase with each other instantaneously, and this point may be taken as the instant when $t = 0$. This artifice enables us to omit any initial phase angle from expression (5) and further simplifies the mathematics without invalidating the argument.

Substituting for "x" from (5) in equation (1), expanding, and collecting coefficients, the output can be expressed in the form shown in Table 1.

It is perhaps convenient to consider the harmonics as being merely a special case of intermodulation, due to each fundamental tone beating with itself. In this connection it is interesting to see what happens when the two tones approach one another in frequency until in the limit, they are equal. Then :—

$$\omega_1 = \omega_2 = \omega \quad .. \quad .. \quad .. \quad .. \quad (6)$$

We have already stated that $B + C = A$, and it will simplify the arithmetic if we make $B = C = \frac{1}{2}A$. In order that the peaks shall reach the same point on the distortion curve in each case, it is also necessary to stipulate that the two waves are in phase.

If we now write ω for ω_1 and ω_2, and $\frac{1}{2}A$ for B and C, in Table 1, and collect together and simplify the coefficients of each of the resultant frequencies, we are left with :—

$$e_0 = (a + \tfrac{1}{4}cA^2) + (bA + \tfrac{3}{8}dA^3) \cos \omega t + (\tfrac{1}{2}cA^2) \cos 2\omega t + (\tfrac{1}{8}dA^3) \cos 3\omega t + \ldots \quad (7)$$

Compare this with equation (4) for the single tone. In the case of the intermodulation analysis we have agreed to omit the fourth and higher powers of "x" in the series, for simplicity's sake, so that the coefficient e in equation (4) becomes zero, if we are to get a direct comparison. Rewriting equation (4), omitting all terms containing e, results in an expression identical with equation (7).

This result may be said to be obvious, but sometimes obvious results do not work out when subjected to analysis : and sometimes they are not obvious until they have been pointed out. The interesting point to be noted is that harmonic distortion and intermodulation distortion are not two entirely different kinds of distortion, as some people seem to think, but are merely two symptoms of the same complaint, namely non-linearity of the transfer characteristic. Provided enough terms are taken, measurements of either will tell the whole story, but there are many cases when it is not possible to measure enough terms.

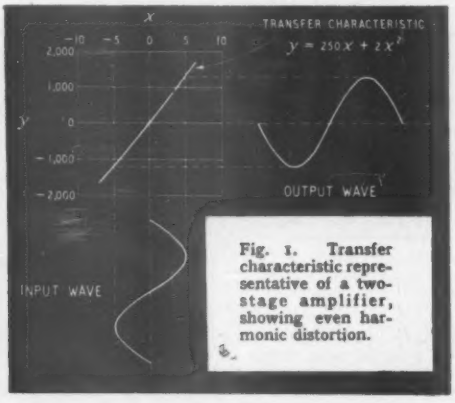

Fig. 1. Transfer characteristic representative of a two-stage amplifier, showing even harmonic distortion.

For example, if we want to assess the distortion of a typical audio amplifier at 10 kc/s, we shall be lucky if we can measure even the second harmonic. But by letting the 10 kc/s note drive the amplifier to the required level, and adding a second note of lower level and frequency, say 400 c/s, 12 db down in level, we can produce intermodulation tones within the pass band of the amplifier, which can be measured, as described previously in this journal[1] and elsewhere. With most audio-frequency apparatus, the intermodulation percentage usually exceeds the harmonic percentage, so that for low distortion levels, it is easier to measure, and probably is directly responsible for most of the annoyance value of the distortion.

The method generally employed for measuring the intermodulation is to mix the two tones and put them through the apparatus under test. The lower frequency tone is filtered out from the output, and the high-frequency tone, which becomes the carrier, together with the principal intermodulation products in the form of sidebands, is passed to a detector of known efficiency (sometimes !). The output of the detector will contain the low-frequency tone, together with the modified carrier and sidebands, and higher-order products. All but the low-frequency tone are filtered out, and the latter is measured and compared with the amplitude of the carrier which produced it. The ratio is expressed as a percentage of the carrier, and generally refers to peak values. The r.m.s. or arithmetic value sometimes measured and quoted cannot be inferred from this, as the sum of all the intermodulation products is far from sinusoidal.

To get an idea of the magnitudes to be expected, let us take a very simple case as a practical example. Suppose that in equation (1) we make $a = 0$, $b = 250$, $c = 2$, $d = e = f$ etc. $= 0$

Then $y = 250x + 2x^2 \quad .. \quad .. \quad .. \quad (8)$

is the equation of the transfer characteristic, and the curve is shown in Fig. 1. This might represent a two-stage amplifier, having an amplification of 250 times, and perhaps in need of a little feedback. Into this amplifier we put a 400-c/s sine wave (or cosine wave) of amplitude 5. Then $A = 5$ and $\omega = 2\pi \times 400$ in equation (2). We shall write the symbol cos (400) to represent cos $(2\pi \times 400)t$, etc. Substituting these values in equation (4), we obtain $e_0 = (0 + 25 + 0) + (1{,}250 + 0) \cos (400) + (25 + 0) \cos (800) + (0) + (0) + \text{etc.}$ The 2nd harmonic amplitude is 25 when the fundamental is 1,250, i.e., there is $\frac{25 \times 100}{1{,}250}$ = 2 per cent 2nd harmonic, and no 3rd or higher.

Suppose now that we apply two tones simultaneously, namely 400 c/s at amplitude 4, and 4,000 c/s at amplitude 1. Then

$$B = 1,\ C = 4, \text{ and } B + C = A = 5.$$

Substituting these values in Table 1, and simplifying we obtain

$$e_0 = 17 + 250 \cos (4{,}000) + 1{,}000 \cos (400) + 1 \cos (8{,}000) + 16 \cos (800) + 8 \cos (4{,}400) + 8 \cos (3{,}600).$$

From this, filter out all frequencies below, say, 2,000 c/s (taking care that the filter coils do not intro-

[1] "Intermodulation Distortion," by Thomas Roddam. April, 1950, p. 122.

duce more intermodulation than the amplifier under test) leaving :—

$$250 \cos (4{,}000) + \cos (8{,}000) + 8 \cos (4{,}400) + 8 \cos (3{,}600).$$

The last two terms of this expression are

$$8[\cos (4{,}000 + 400) + \cos (4{,}000 - 400)] = 8[2 \cos (4{,}000) \cos (400)] \quad .. \quad .. \quad .. \quad (9)$$

The signal thus consists of

$$250 \cos (4{,}000) + 16 \cos (4{,}000) \cos (400) + \cos (8{,}000)$$

$$= 250 \left[1 + \frac{16}{250} \cos (400) \right] \cos 4{,}000 + \cos (8{,}000) \quad .. \quad .. \quad .. \quad .. \quad (10)$$

As is well known, the first part of this expression represents a 4,000 c/s carrier modulated to a depth of $\frac{16}{250} = 6.4$ per cent by a 400 c/s tone. If this combination is passed through a detector, and all frequencies above, say 600 c/s are filtered out, we shall be left with a 400 c/s tone whose magnitude will be 6.4 per cent of the carrier level measured at the detector input, provided that the detector efficiency is 100 per cent.

To get the true value, the measured level must be divided by the detector efficiency, and as this is liable to be variable with carrier strength, measurements should always be made at a fixed carrier level. The problem of measuring accurately the detector efficiency is probably the most difficult one to be solved in making up an intermodulation test set, and is one frequently overlooked. A diode detector operated at 10 volts or more input, with a condenser of optimum value in parallel with a high-resistance load, has a fairly high efficiency (about 92 per cent with practical component values, for a frequency ratio of 10 : 1), but even so it should be checked if good accuracy is desired.

The question of detector efficiency has been very fully treated in the literature[1], and it is not proposed to go more fully into it here, except to emphasize its importance. For example, it sometimes happens that the two frequencies are so chosen that an important intermodulation product falls within an octave or so of the carrier. Under these conditions, it is not safe to use a reservoir condenser after the detector, and the efficiency falls to $\frac{1}{\pi}$. Unless allowance is made for this, the amplifier under test will appear about three times better than it really is ! The filter may modify the detector behaviour considerably, and it is advisable to use a buffer valve between detector and filter.

It has been shown that in the case under discussion, the intermodulation product is 6.4 per cent of the carrier, and we started with a 4,000 c/s carrier of one-fifth of the total amplitude. The intermodulation product is thus only $\frac{6.4}{5}$ or 1.3 per cent of the total input wave, and, on the face of it, would appear more difficult to measure than the 2 per cent harmonic in the single tone case. However, after filtering, it is permissible to amplify the carrier and sidebands considerably, even at the risk of some distortion, without the intermodulation depth being materially affected. This gives the intermodulation test method a slight advantage.

One further practical example is of considerable interest. Using exactly the same process as in the previous example, let us introduce, in equation (1)

$$a = 0, b = 250, c = 0, d = -2, e = f = \text{etc.} = 0.$$

Then the equation of the transfer characteristic is

$$y = 250x - 2x^3 \quad .. \quad .. \quad .. \quad .. \quad (11)$$

and its shape is shown in Fig. 2. This might represent a poor gramophone pickup, an overloaded transformer, or a well-balanced push-pull amplifier driven up to overload point. We shall again put in a single 400 c/s note of amplitude A = 5. Substituting these values in equation (4) we have

$$e_0 = (0 + 0 + 0) + (1{,}250 - 187.5) \cos (400) + (0) - (62.5) \cos (1{,}200) + (0) + \quad .. \quad (12)$$

The 3rd harmonic term is 62.5 when the fundamental is 1,062.5 and the 3rd harmonic is therefore about 5.9 per cent of the fundamental. For the intermodulation case, we apply the same tones as before, and again B = 1, C = 4 and B + C = A = 5. Substitute in Table 1, filter out all frequencies below, say 2,000 c/s, as before, and simplify, and we get

$$e_0 = 200.5 \left[1 - \frac{48}{200.5} \cos (800) \right] \cos (4{,}000) - \tfrac{1}{2} \cos (12{,}000) - 12 \cos (8{,}000) \cos (400) \quad .. \quad (13)$$

The last term has no carrier, so only the first term will be demodulated in the detector. But in this expression there is no 400 c/s term in the modulation bracket, so nothing will pass through the 600 c/s low-pass filter, and no distortion will be measured on the intermodulation meter ! From the harmonic distortion test, however, we already know that the distortion is somewhat fearsome, nearly 6 per cent of third ! Obviously one up to harmonic testing.

Design Precautions

Of course, if we are aware that the principal intermodulation tone occurs at 800 c/s we can alter the cut-off frequency of the low-pass filter so that it will pass. Even so, the reservoir condenser of the detector, which has been made of optimum value to give the highest possible detector efficiency for a modulation tone of 400 c/s, will bypass the 800 c/s tone partially, with the result that the effective overall efficiency of the detector will fall to about 75 per cent. If we redesign the detector for 800 c/s with a carrier of 4,000 c/s, the optimum overall efficiency becomes about 90 per cent. But we should be lucky if the equipment under test had a transfer characteristic represented by as simple a power series as the one we have chosen, and maybe there are important intermodulation products at 1,200 and 1,600 c/s. It is these factors

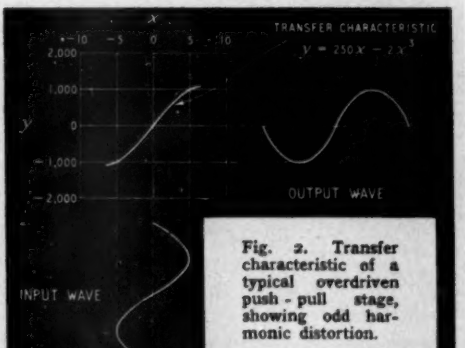

Fig. 2. Transfer characteristic of a typical overdriven push-pull stage, showing odd harmonic distortion.

[1] "Radio Receiver Design," by K. R. Stunley. Part 1. p. 369. (Chapman & Hall.)

which cause the wide divergences of intermodulation reading as measured on different measuring sets.

The great danger lies in the fact that, in the push-pull amplifier example just considered, there would in practice almost certainly be some second harmonic distortion, and therefore some 400 c/s, intermodulation present in the output—say 5 per cent. With the original 600 c/s filter, this would be measured, and might well be quoted as the intermodulation figure for the amplifier. Equation (13) has shown us that the principal intermodulation tone is at 800 c/s, and its modulation depth is $\frac{48}{200.5^2}$, or nearly 24 per cent!

To generalize, it may be said that, in cases where second harmonic distortion predominates, the principal intermodulation product will occur at the difference frequency of the two tones, but where third harmonic is greater, it will fall at $(f_1 \pm 2f_2)$ or $(2f_1 \pm f_2)$, depending on the values of the coefficients. If higher order harmonics are present in any great magnitude, it is safer to measure all the separate intermodulation products with an analyser.

The moral of this story is that, while intermodulation testing is a very useful tool, always make sure that the test equipment fully covers all the requirements. And that is not as simple as we are sometimes led to believe.

General reference: "An Analysis of the Intermodulation Method of Distortion Measurement," by W. S. Warren and W. R. Hewlett. *Proc. I.R.E.*, Vol. 36, No. 4, April, 1948.

APPENDIX

The following trigonometrical identities are useful in deriving the equations, and Table 1.

$$\cos(\theta + \phi) = \cos\theta\cos\phi - \sin\theta\sin\phi$$
$$\cos(\theta - \phi) = \cos\theta\cos\phi + \sin\theta\sin\phi$$

Whence, adding, $\cos(\theta + \phi) + \cos(\theta - \phi) = 2\cos\theta\cos\phi$

or if $\theta = \phi$, $\cos 2\theta + 1 = 2\cos^2\theta$

It follows from this that

$$\cos^2\theta = \tfrac{1}{2}\cos 2\theta + \tfrac{1}{2}$$
$$\cos^3\theta = \tfrac{3}{4}\cos\theta + \tfrac{1}{4}\cos 3\theta$$
$$\cos^4\theta = \tfrac{3}{8} + \tfrac{1}{2}\cos 2\theta + \tfrac{1}{8}\cos 4\theta.$$

New Daventry Station

200-kW Transmitter Designed for Unattended Working

By R. W. HALLOWS, M.A. (Cantab.), M.I.E.E.

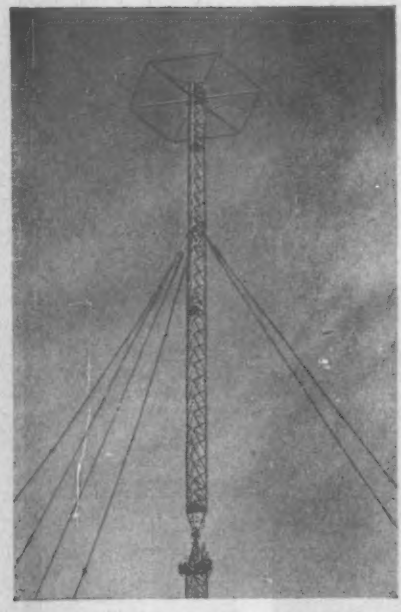

Top section of the Daventry mast, showing the insulated "break". The radiator is fed at this point through a concentric line.

THE first question that a visitor to the B.B.C.'s new "Third Programme" station at Daventry feels inclined to ask is: "Where's the transmitter?" For he is taken to begin with to a large field in which the only visible radio feature is a 725ft lattice mast and no building save the small aerial tuning house is to be seen. The transmitter is in fact a mile away on the other side of an intervening hill. The reason for this unconventional layout is that the transmitter occupies the hall which originally housed the old 5XX. Near this there are now numerous aerial arrays belonging to the shortwave transmitters; interaction between these and the new station's vertical radiator would have been inevitable, had it been erected on the site.

The transmission line, which is actually 2,640 yards in length, is of the open-wire unbalanced type. The inner conductor consists of four No. 6 gauge copper wires spaced round the circumference of a half-inch circle; the outer conductor has eight wires of the same gauge spaced round an 18in circle. The line is carried on 18ft steel poles at 50yd intervals. A remarkable feature is that the loss over this great length of line is rather less than 0.35 db: to obtain an aerial output of 150 kW the input needed from the transmitter is 162 kW.

The vertical radiator normally operates as a virtual dipole, the feed being to its nodal point. The mast is divided into two sections by an insulator at 460ft from the ground. The upper section has a "capacitance top" consisting of six 35ft horizontal spokes, with their outer ends inter-connected by wires, and the two sections are balanced by high-Q loading inductances in the aerial tuning house. Centre-feed has been adopted with a view to minimizing high-angle radiation due to feed-current effects; with a comparatively feeble sky-wave a large fading-free service area is ensured.

It was expected that this first-class service area of the new

station would have a radius of the order of 100 miles and this expectation seems generally to have been fulfilled.

The aerial may also be fed from the bottom as a stand-by measure, in which case it functions as a normal series-loaded mast radiator. The switches controlling the centre-feed and bottom-feed coupling equipments in the aerial tuning house are remotely controlled from the main transmitter building.

It seems almost uncanny that a high-powered station should have been designed for unattended working; yet, once the Third Programme station has been run in, it is intended that there should normally be no one in the transmitter hall while it is operating. Automatic monitoring apparatus will keep an untiring electronic eye on the quality, continuously comparing the signal radiated from the aerial with the signal at its point of origin in London, and sounding an alarm bell in the nearby short-wave transmitter building on the occurrence of a defect serious enough to cause any kind of distortion noticeable to the ears of listeners. This is the first application of automatic monitoring to a high-power transmission.

It is likely that the station will eventually be operated entirely by remote control, either from another building at Daventry or from London. Experiments are in progress with apparatus which enables the transmitter to be switched on or off from a distant point and connected either to the aerial or to a test load. There is, however, one difficulty here: the transmitter is a "twin", consisting of two 100-kilowatt plants working in parallel, and the necessary phasing must be done by engineers on the spot.

Though the available output power is 200 kW, only 150 kW can be used at present, owing to the limitations imposed by the Copenhagen Plan. The advantage of using coupled transmitters for broadcasting is that, should one of them break down the other carries on the service; in the present instance the power of the transmitter left in action could presumably be run up to 100 kW and there should be no serious fall in signal strength.

There are many points of interest about the two transmitting sets. Not so many years ago the construction of the first transmitters to use water-cooled valves was hailed as a great advance in wireless technique, as indeed it was. To-day, the Third Programme transmitter marks an even greater step forward by using air-cooled valves throughout! The anomaly is, of course, only apparent. Water-cooling, when it was introduced, made really high-powered broadcasting possible by providing the only means then known of dissipating heat sufficiently rapidly. The necessary water circulating apparatus is, however, expensive besides occupying a great deal of space and involving the use of rotating machinery. Air-cooling on the grand scale (each 100 kW section of the transmitter requires some 12,000 cubic feet of air per minute) is a greater advance, since it is cheaper to install, needs far less space and contains no rotating machinery except the blower. It also lends itself readily to remote control. The air-blower, by the way, is the only rotary machine in the transmitter building, for the filaments of all valves are heated by a.c.

The use of air cooling has been made possible partly by special valve design and partly by sharing out the load amongst a considerable number of valves. In either half of the transmitter there are four BR126 triodes in parallel push-pull in both the final amplifier and the final modulator stage. Sixteen valves, therefore, take part in providing the normal 150 or possible 200 kilowatts of modulated output power.

The 12,000-V h.t. supply for the modulator and modulated amplifier is provided by six single-anode mercury-arc rectifiers in a full-wave three-phase circuit. The system is more compact than those using

One 100-kilowatt unit (with combining unit at extreme left) of the high-power Marconi air-cooled transmitter at the new Daventry station.

multi-anode rectifiers and enables a h.v. transformer of ordinary type to be used.

The control desk is striking by reason of its neat and convenient layout and of the completely temporary-mental-aberration-proof arrangement. When the station is being controlled manually the engineer in charge can see the transmitter through the large windows in front of him. The controls—reminiscent of those of some wartime radar sets—are interlocking, with automatic time-delay contactors where necessary. Thus the filaments cannot be switched on until the air-blower has been started; after the filament button has been pressed there is an appropriate warming-up time before a pilot lamp lights up to show that the full voltage has been applied; h.t. voltage cannot be fed to the anodes until the grids have their proper biasing voltages.

Either half of the transmitter may be connected to the aerial or to a water-cooled artificial load, a conspicuous green arrow on the front of the transmitter concerned lighting up and indicating unmistakably which connection has been made.

Can we see in this Third Programme transmitter the shape of things to come in the design and lay-out of broadcasting networks? I believe that we can. Giving one's imagination play, one sees each network of the future as a number of high-, medium- and low-powered "slaves", all remotely controlled by a central "master" station and all virtually unattended. Rapid developments are taking place in remote-control methods and the system seems certain to have wider and wider applications as time goes on. If all new stations (except, possibly, those of very small power) are to be of the twin-transmitter type, as I believe will be the case, remote control may eventually be able to take charge of the phasing. And may not the automatic monitor develop into something more than a warning device? It appears well within the bounds of possibility that the "automatic controller" of some years hence may be able to "interpret" the signals of its monitoring section and to set on foot in its controlling section the action necessary to correct the defects to which they call attention without any human intervention.

Electromagnetic Gramophone Pickups

Design Problems Discussed by the B.S.R.A.

UNDER the title "The Design of Magnetic and Dynamic Pickups," H. J. Leak, M.Brit.I.R.E., gave a lecture and demonstration to the British Sound Recording Association on April 20, on the relative merits of moving-iron and moving-coil types. After describing the principles underlying their operation, he gave demonstrations using intermodulation and square-wave test records in conjunction with a large-diameter demonstration c.r. oscilloscope in support of his preference for the moving-coil type. He pointed out the possibility of non-linearity in moving-iron pickups arising from the square-law variation of attraction as the armature was deflected from the mid-position towards either of the pole pieces, and also from hysteresis arising from the cyclical change of flux in the armature.

In the discussion which followed defenders of the moving-iron principle, while admitting the existence of these potential sources of distortion, showed that by choice of suitable materials and proper design they could be reduced to levels comparable with distortions which might arise from non-uniformity of the field in moving-coil pickups. In the moving-iron pickup it was pointed out that the non-linearity was of opposite sense on each side of the mid-position and that for small amplitudes the response was linear.

Reference was made to the rustling noise which is often heard when the armature of a moving-iron pickup is moved from side to side, slowly by hand. This was attributed to Barkhausen noise which arises from the discrete orientation of particles in the crystalline structure of the magnetic material. There is a threshold value below which this effect is not observed, and, as in the case of distortion, the obvious solution would be to design for operation at low levels.

R.I.C. Components Specifications

IN order to cover all radio requirements it is recommended by the Radio Industry Council that components be classified under three headings, red, yellow and green in descending order according to their ability to withstand extremes of temperature and humidity.

Specifications covering the classifications, dimensions, conditions of use, types, tolerances, methods of storage, electrical and mechanical tests, where appropriate, of a number of different components have been issued so far, and it is proposed to deal with all components in a like manner in future publications.

Among the latest specifications issued by the R.I.C. are those for variable capacitors (RIC/141), fixed paper capacitors (RIC/136), small power transformers (RIC/214), plugs and sockets for use up to 1 Mc/s (RIC/321), and for use above 1 Mc/s (RIC/322).

A colour code for fixed capacitors has at long last been agreed. This is the same as that used for resistors, the values indicated being in picofarads. The alternative numerical method of marking is optional.

Copies of these specifications, which are intended for use within the radio industry only, and of all earlier issues, can be obtained from The Radio Industry Council, 59, Russell Square, London, W.C.1, the price being 5s each.

FROM AERIAL TO LOUDSPEAKER

A STEP-BY-STEP survey of the superhet is given by W. E. Miller, Editor of our associate journal *The Wireless & Electrical Trader*, in his book, "Radio Circuits," the third edition of which has recently been issued by the Trader Publishing Company. This edition includes a new chapter on the "all-dry" portable and band spread and automatic tuning. This 120-page book, which has 64 diagrams, costs 5s (postage 4d).

The WESTON S.75 Multi-Range Test Set

53 Ranges with Rotary Switch Selection

This uniquely comprehensive Test Set has 53 ranges for measuring A.C. and D.C. current and voltage, resistance and insulation. It is completely self-contained, with internal batteries to provide power for the ohms ranges and self-contained power pack for insulation measurement at 500v. Selection is carried out by two 20-position switches. A fully-protective safety device is fitted and is operative for forward or reverse overload. The 150-division 6in. scale is uniformly divided and is fitted with an anti-parallax mirror. The set is enclosed in a handsome bakelite case and fully complies with B.S.S. No. 89, covering first-grade instruments. Full details of the ranges covered, and of the complete specification, will gladly be supplied on request.

SANGAMO WESTON LIMITED

ENFIELD, MIDDLESEX

TELEPHONE: ENFIELD 3434 (6 LINES) AND 1242 (4 LINES)
TELEGRAMS: SANWEST, ENFIELD

BRANCHES:
Glasgow, Manchester, Newcastle-on-Tyne, Leeds, Liverpool, Wolverhampton, Nottingham, Bristol, Southampton & Brighton

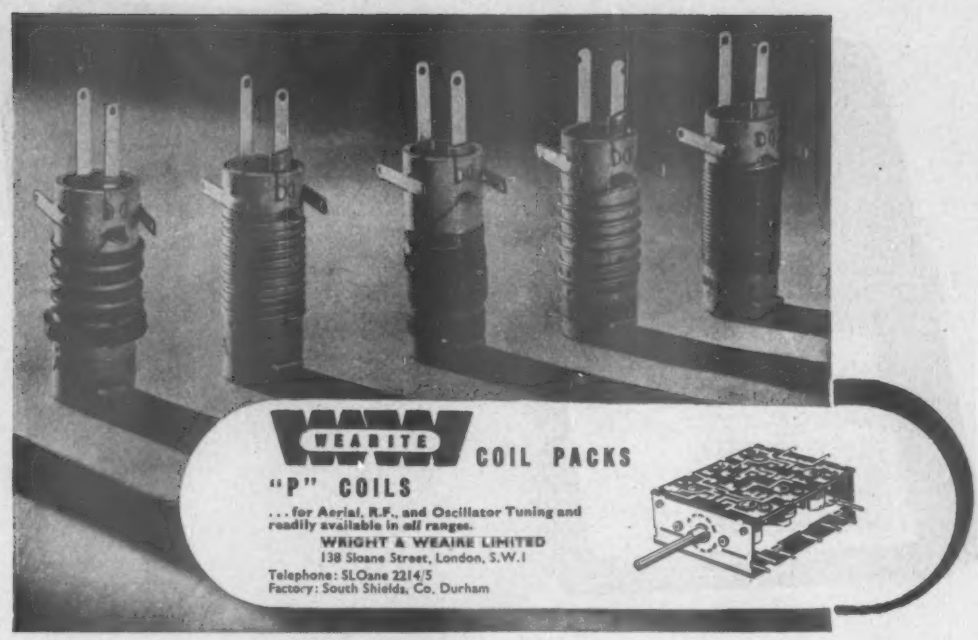
WEARITE
COIL PACKS
"P" COILS
... for Aerial, R.F., and Oscillator Tuning and readily available in all ranges.
WRIGHT & WEAIRE LIMITED
138 Sloane Street, London, S.W.1
Telephone: SLOane 2214/5
Factory: South Shields, Co. Durham

Sound Sales

PRODUCTS

CHOSEN BY THE COMMITTEE FOR EXHIBITION AT THE

—Festival—

A FESTIVAL OF MUSIC AWAITS YOU

VIA THE NEW

Tone Colour Unit

At our London Office and Showrooms:

LLOYDS BANK CHAMBERS, 125, OXFORD ST.

GERRARD 8782

Frequency Modulation

2—Sidebands and Noise

By "CATHODE RAY"

BEFORE we start on what is bound to be rather less simple than last month's general review of f.m., let us be quite clear about the various frequencies involved:

Carrier-wave frequency, f_c. The frequency of the radiated waves, usually reckoned when they are not being modulated. Commonly of the 100-Mc/s order.

Modulation frequency, f_m. The frequency at which f_c is "wobbled" by modulation; e.g., for sound, anything up to 10-20 kc/s.

Frequency swing, f_s. The amount of the "wobble" each side of unmodulated f_c. For example, if f_c is 30 kc/s and f_c is 90 Mc/s, the carrier frequency wobbles between 89.97 and 90.03 Mc/s (Fig. 1). It is a measure of the depth of modulation.

Frequency deviation, f_d. The maximum frequency swing allowed at a particular station. A standard f_d for broadcasting is 75 kc/s.

The ratio f_s/f_m is the *modulation index* (M) and f_d/max. f_m is the *deviation ratio*. Whereas the deviation ratio is part of the fixed specification of a station, the modulation index refers to what is actually happening at any given moment, and is continually varying during a normal programme. Since the effect of modulation is to vary the radiated frequency between $f_c - f_d$ and $f_c + f_d$ as extreme limits, it probably seems obvious that the bandwidth occupied by the station is $2f_d$. Actually that is true only when the frequency is varied infinitely slowly. When it is varied at the frequency f_m, and f_m is comparable with or greater than f_d, the frequency band is considerably broadened. In fact it is rather more than either $2f_d$ or $2f_m$ or even $2(f_d + f_m)$.

Another thing about frequency modulation—and this may seem even more incredible—is that although modulation by a constant f_m causes the carrier frequency to slide continuously to and fro between its limits, it is the same thing as a number of fixed frequencies, just like the carrier-wave and sidebands in amplitude modulation but rather more complicated. This statement probably sounds as sensible as saying that a man journeying to and fro every day between home and work is no different from the same man standing still all the time at a number of points *en route*. The mathematical proof of the above facts is more difficult than the corresponding proof for amplitude modulation, and it is far more difficult—I would be inclined to say impossible—to visualize. But it is quite easy to get a picture of both by a simple vector diagram. In case you are not already familiar with the vector diagram for a.m. I will begin with that.

The length of a vector, you will remember, represents the magnitude of an alternating voltage (or current), and the frequency is represented by the number of anticlockwise revolutions the vector makes per second. So an unmodulated carrier wave is represented by a single vector rotating at f_c revs. per second. Since f_c is a radio frequency, it is rather difficult to see what it is doing when it is turning so fast. But if we climb on to it so that we are rotating at the same speed it will seem to be standing still, relative to us, and we can study it closely. If it is to represent amplitude modulation it must alternately lengthen and shorten f_m times per second without altering its own frequency of rotation. But it is not in the nature of vectors to lengthen and shorten just by themselves. However, a vector can be lengthened by adding another vector to it in the same phase, or shortened by adding another one to it in opposite phase. A single extra vector, if it rotates relatively to the first, comes alternately into phase and opposite phase, so when added to it does give a resultant that alternately lengthens and shortens.



Fig. 1. Frequency diagram illustrating the meaning of frequency swing, f_s. The carrier-wave f_c, in this example is 90 Mc/s, and f_s is 30 kc/s.



Fig. 2. (a) When a carrier wave, represented by the vector OC, and a single side frequency, represented by CM, are added together, the resultant (OM) alternately lengthens and shortens (amplitude modulation) and also wags from side to side of OC. (b) But if there are two side frequencies, equally lower and higher than f_c, so that their vectors CM_1 and M_1M_2 rotate in opposite directions relative to OC, the resultant (OM_2) shows pure amplitude modulation.

But unfortunately the resultant also wags from side to side, like the connecting rod in an engine (Fig. 2(a)). This undesired complication can be avoided if instead of adding a single extra vector we add a pair of them, both rotating at the same speed relative to the carrier-wave vector, but in opposite directions. If all three start off in the same phase, the vector sum of the three is always in phase with the carrier-wave vector, but is alternately longer and shorter; and if the two extra vectors rotate at constant speed, the lengthening and shortening follow a sine-wave law. (You can demonstrate this for yourself by drawing Fig. 2(b) with CM_1 and M_1M_2 at $\pm$ 0°, 30°, 60°, 90°, 120°, etc., up to 360°, relative to OC, and plotting the length of OM_2 against angle). If their speed relative to OC is $+f_m$ and $-f_m$ respectively, then their actual speed is $f_c + f_m$ and $f_c - f_m$. What we have done, therefore, is to show that this group



Fig. 3. If M_1 M_2 in Fig. 2(b) is reversed in phase, the result is phase and frequency modulation, mixed with a little a.m.

Fig. 5. With a wider angle COM_2 it is necessary to correct for the difference in length (amplitude modulation) between OM_2 and OC by a second pair of side frequency vectors, which add to OC in the centre position (CC′) and subtract from it at the extremes (M_2 M'_2).



of three vectors, all of constant length, adds up to a single vector of alternating length—which clearly represents an amplitude-modulated carrier wave. (And in case you feel that this is only a pretty picture on paper, it should be said that if you actually take three oscillators and adjust their frequencies, phases, and amplitudes suitably and add their outputs together the result cannot in any way be distinguished from the result of amplitude-modulating a single oscillator).

Frequency modulation can be demonstrated by a surprisingly slight modification of Fig. 2(b). All you have to do is reverse one of the " sideband " vectors. The resultant of the two is then at right angles to the carrier-wave vector, instead of being in the same phase (positively and negatively in turn). The resultant of all three, OM_2 in Fig. 3, then wags from side to side f_m times per second. When it coincides in position with OC it is moving at its fastest relative to OC, alternately to left and right. During its leftward wag it is rotating faster than OC, and during its rightward wag slower. This represents an alternating voltage (or current) whose frequency alternately increases and decreases. So now we see that the same fixed-frequency carrier and sideband frequencies, by a change in phase relationship, add up to a frequency-modulated carrier wave.

The only flaw in this second demonstration is that the resultant OM_2 not only gains and loses in frequency but also lengthens and shortens somewhat; in other words, we get some a.m. mixed with our f.m. The effect is small so long as the sideband components CM_1 and M_1M_2 are much shorter than OC, *making the angle COM_2 always quite small.* I have emphasized those words because they are an important clue to the significance of M, the modulation index. The official title of the angle COM_2 is *phase swing*, but I am going to stick to my highly unofficial term, " angle of wag."

Of the several important matters arising at this point, the first that should be noted is that the usual modulation sidebands, $f_c + f_m$ and $f_c - f_m$, still appear, entirely regardless of the extent to which the carrier-wave is wobbled. So bang go the dreams of the would-be inventors who hoped to keep down the bandwidth by narrow frequency deviation. The only objection that could be raised to this conclusion is that what has been demonstrated in Fig. 3 is not pure f.m. but a mixture of f.m. and a.m. Any faint hope that the measures necessary to eliminate the remaining a.m. might somehow narrow the frequency band is doomed to worse than disappointment. To start with, it is obvious that the more the frequency swing is reduced, the more the angle of wag is reduced, and the more nearly one approaches pure f.m. It is easy to see, by considering Fig. 3, that if f_c is made very much less than f_m, the result is almost pure f.m., in which the sideband waves are equal to $f_c + f_m$ and $f_c - f_m$ and are very small compared with the carrier wave. This situation can be depicted as in Fig 4. The $2f_m$ bandwidth can only be narrowed by stopping modulation altogether.

Balancing out the A.M.

The next thing is to find how to eliminate the a.m. when the angle of wag is *not* extremely small. What we have to do is to shorten the resultant vector at the limits of its wag, and perhaps lengthen it in its centre position. Fig. 5 shows the Fig. 3 diagram at its extreme limits with a fairly wide angle, and obviously the resultant vector OM_2 is considerably longer in those positions than in the centre, where it is equal to OC. But if an extra bit is added to OC in the centre position, making the resultant OC′, and taken off from it at the extremes, making it OM'_2, it is possible to make OC′ and OM'_2 the same length. Note that this necessitates *two* lengthenings and shortenings for every one modulation cycle. So we can get it by adding another pair of comparatively small vectors, rotating like CM_1 and M_1M_2 in opposite directions to OC, but at twice the frequency (i.e., $2f_m$). The phases of these two new vectors will have to be the same as those in Fig. 2 (because we want to balance out an unwanted a.m. without introducing any more f.m.), and their combined length must be half the difference between OM_2 and OC, so that when they are added to OC and subtracted from OM_2 the result will be equal. We can now see that with increased frequency

Left: Fig. 4. When frequency modulation is such that the phase angle represented by COM_2 in Fig. 3 is kept very small, the carrier and one pair of side waves are all that are present in appreciable strength, and the frequency diagram is like this (angle = ±6°).

Right: Fig. 6. The frequency diagram (or spectrum) when the angle of wag is nearly ± 30°.



swing Fig. 4 will turn into something like Fig. 6. The bandwidth of the transmission is double what it would be with undistorted a.m.

It is obviously going to be a more complicated business finding out if these "second-order" vectors neutralize the unwanted a.m. completely at all angles and not just at the centre and extreme positions. If you are sufficiently energetic and interested you will draw another set of vector diagrams very accurately to find out. If not, you will probably take my word for what you may have instinctively suspected—that they do not. The approximation is quite good up to about 45°, but beyond that it is necessary to recognize the existence of what had previously been negligibly small third-order vectors, spaced $3f_m$ in frequency from the carrier wave. The greater the angle, the larger the number of these side frequencies and the greater the bandwidth occupied by the transmitter. The exact amplitudes can be calculated mathematically by the use of Bessel functions. This sounds very highbrow, but fortunately graphs or tables of Bessel functions are given in most engineering reference books and (as Dr. E. K. Sandeman put it in a remark that deserves to become a classic) "the fact that these (graphs) are called Bessel functions does not make the curves any more difficult to read."

Angle of wag and f_s

Up to now we have been accepting the angle of wag as a measure of the frequency swing f_s, but have not yet discovered exactly how the two things are related. We do know that f_s is represented by the rate at which the vector OM_2 is gaining or losing on OC when it coincides in position with OC. The greater f_s, the greater the angle it will make in a given time. The given time, of course, is one quarter of a modulation cycle. So the angle can also be increased by increasing the time occupied by the modulation cycle—in other words, by reducing f_m. As a matter of fact, if the angle of wag, which we can denote by ϕ, is reckoned in radians (1 radian $=180/\pi$ degrees), and the modulation waveform is sinusoidal, it is related to f_s and f_m in the following simple manner:

$$\phi = \frac{f_s}{f_m}$$

But we have already defined f_s/f_m as M, the modulation index. So $\phi = M$, and this is why M is significant—the sideband structure of an f.m. transmission depends entirely on it.

The Bessel functions that give the relative amplitudes of the component waves in f.m. are in fact functions of M. They are denoted by J, and a graph or table for $J_n(M)$ shows how the amplitude of the nth side frequencies ($f_c \pm nf_m$) varies as M is varied. I have not reproduced any graphs or tables here, but anyone interested can look them up; for example in Sandeman's "Radio Engineering" Vol. 1, p. 550.

Fig. 4 was drawn for M = 0.1 (ϕ = nearly 6°) and Fig. 6 for M = 0.5 (ϕ = 29°). Fig 7 extends the picture gallery to include M equal to 1, 2.5, and 10. The last of these shows sidebands something like 14 times as wide as with a.m. And the last two show another interesting difference from a.m.—the amplitude of the carrier wave itself is very much affected by depth of modulation. For any M it is given by $J_0(M)$, relative to 1 for no modulation.

This may be the right moment for saying something about phase modulation. What one actually sees, looking at Fig. 3 in motion, is phase modulation rather than frequency modulation. The phase of the resultant vector OM_2 is quite plainly shifting to and fro relative to OC. We know that in order to do so its frequency must alternately rise and fall. But the frequency changes do not actually show up on the diagram so directly as the phase changes. In fact, when OM_2 has deviated farthest from OC there is no difference in frequency between them, and when the frequency deviates most the two vectors coincide. So is there any particular point in calling it f.m. rather than p.m.? Aren't they both the same, anyway?

In a sense they obviously are, and yet in another sense they aren't. Quite clearly it is impossible to alter the frequency of a carrier wave without altering its phase relative to what it would have been if the frequency had not been altered. And vice versa. If we were interested in only a single modulation frequency, then f.m. and p.m. would be practically the same thing. But now suppose we double f_m in Fig. 3. This means that each modulation cycle lasts only half as long. So if the frequency swing is kept the same as before, it has only half the time in which to build up a phase shift, and the phase shift will be halved. On the other hand if the phase swing is kept constant the frequency swing must be doubled to obtain it in half the time.

Calculus students will see at once that this relationship between frequency and phase is $f = d\phi/dt$ or $\phi = \int f dt$. The same relationship exists between speed and distance. You may care to think out the analogy of a piston in an engine, or constant-velocity and constant-amplitude gramophone recording.

The practical point is that if an f.m. receiver were used with a p.m. transmitter (or vice-versa) the results would be unsatisfactory. The p.m. transmitter would represent equal modulation at all frequencies by equal phase swings, which would mean that the frequency

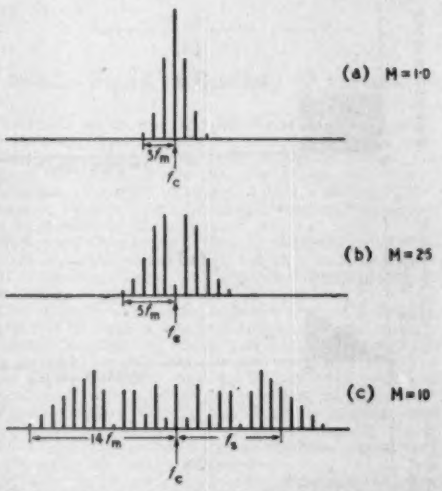

Fig. 7. The modulation index, M, which is equal to the angle of wag (in radians), is 0.1 in Fig. 4 and 0.5 in Fig. 6. Here are some more spectra, for M = 1, 2.5, and 10. Note how complicated f.m. sidebands become even when there is only one modulation frequency, if the frequency swing is relatively large.

swings would be proportional to modulation frequency, and reception would be decidedly lacking in bass and superabundant in "top." As a matter of fact, for a reason I shall explain presently, actual f.m. transmitters and receivers for broadcasting change-over to p.m. from about 3,000 c/s upwards.

And that is the cue to consider how f.m. (and p.m.) differ from a.m. as regards noise. Of the two radically different kinds described last month, let us take random or "fluctuation" noise first. It sounds like continuously escaping steam or rushing water in the background, and is inevitable whenever a large amount of amplification has to be used, as when receiving a very weak signal. I say "background" because if fluctuation noise voltages were anything like as strong as the signal they would (being continuous) reduce the entertainment value of the programme to about nil. So we must assume they are considerably smaller than the carrier amplitude.



Fig. 8. Spectrum of carrier-wave and fluctuation noise after passing through a perfect band-pass r.f. tuner with 30 kc/s bandwidth.

Fig. 9. The detector in an a.m. receiver responds uniformly to Fig. 8, giving the a.f. noise output shown at (a). An equivalent f.m. receiver responds in proportion to the *difference* in frequency between carrier wave and noise (or sidebands), with the result shown at (b). If the f.m. deviation is increased from 15 kc/s to 75 kc/s, and the signal output adjusted to be the same as in (a) and (b), the result is as at (c).

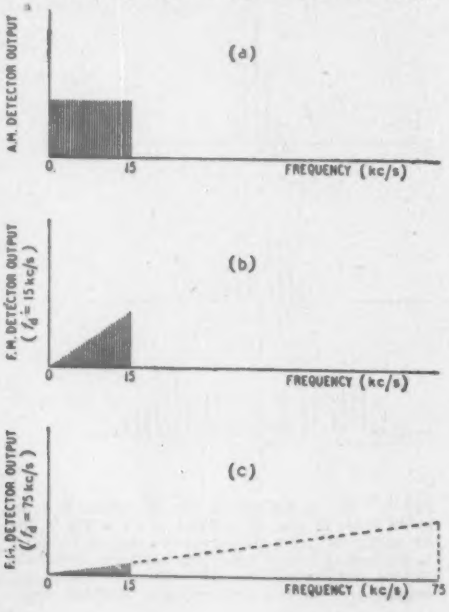

Now the important feature of this type of noise is its uniform distribution over the entire frequency band. At first sight this would seem to put f.m. at a disadvantage, because the wider bandwidth of the radiated signal (compared with a.m.) necessitates accepting a wider band in the receiver and thereby bringing in more noise. It seems paradoxical—to put it mildly—to deliberately increase the bandwidth more than fivefold by standardizing a frequency deviation of 75 kc/s, in a system intended to reduce noise!

Since noise is reaching the receiver at all possible frequencies and (on the average) constant amplitude, we can picture it as an infinitely large number of vectors, all rotating at different speeds. We adopt our usual trick of stepping on to the carrier-wave vector so as to make it look stationary. Relative to it, equal numbers of noise vectors will be rotating in opposite directions. The first part of any receiver, up to the detector, is designed to select signals within a certain frequency band centred on the wanted f_c and reject all others. Suppose, for simplicity and for the sake of comparison, that we have two receivers, one a.m. and the other f.m., and that their selective circuits are identical and consist of perfect band-pass filters accepting all within 15 kc/s of f_c. Then all the noise voltages within this band are amplified equally and all the rest are cut out. The carrier wave and noise voltages applied to the detector can therefore be shown as in Fig. 8.

Because it is difficult to visualize all these noise voltages at once, let us focus attention on one of them, which (since they are all alike, except for frequency) can represent all. We can visualize the situation with the aid of Fig. 2(a), where CM is now the chosen noise vector. It produces a mixture of a.m. and p.m. The a.m., represented by the lengthening and shortening of OM as CM rotates, is the same at all frequencies (because we are assuming that the noise amplitude, represented by the length of CM, is the same), so the output of the a.m. detector (assumed perfect) is equal noise at all frequencies from 0 to 15 kc/s, as shown in Fig. 9(a). The p.m., represented by the angle of wag, ϕ, is also equal at all frequencies. But, as we have already seen, the frequency swing f_s is proportional to ϕ multiplied by the modulation frequency f_m. So it increases steadily as one moves away each side from the carrier frequency. Since the detector of an f.m. receiver is preceded by a limiter which shaves off the tops of the r.f. waves, so removing the a.m., and responds in proportion to f_s, its noise output must be as in Fig. 9(b).

The comparative merit of f.m. and a.m. is complicated by such matters as relative audibility of different frequencies; but assuming level a.f. response up to 15 kc/s (or whatever limit is assumed for both receivers) and 100 per cent depth of a.m. and $\pm$15 kc/s f_m there is a 3 to 1 power ratio, or $\sqrt{3}$ to 1 voltage ratio, in favour of f.m.

Suppose now we increase the deviation ratio from 1 to 5, which necessitates widening the f.m. receiver bandwidth to $\pm$75 kc/s. Other things being equal, this means extending Fig. 9(b) right out to 75 kc/s, and the noise amplitude there will be five times as great as at 15 kc/s. But I have not troubled to draw this rather alarming picture, because we are only interested in signal output up to 15 kc/s, so we can



Fig. 10. Simple de-emphasis circuit, assuming a constant-voltage source. If for a constant current source (such as a pentode) C and R would be in parallel.

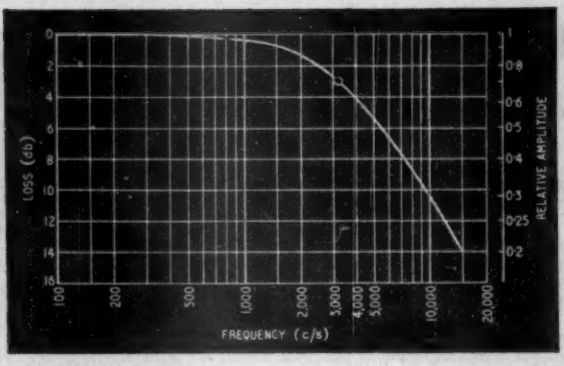

Fig. 11. Frequency characteristic due to the Fig. 10 circuit when CR = 50 microseconds.

put in a very efficient low-pass filter, cutting out everything above that, and we are no worse off than before. As a matter of fact, we are a good deal better off, because the five-fold greater signal deviation gives five times the signal output, and if we reduce everything to bring the comparison back to the original basis the noise is likewise reduced, and the result is Fig. 9(c), which clearly is a vast improvement on (a).

This is not all, however. We see that with f.m. most of the noise comes in with the top audio frequencies. It looks as if we are paying a heavy price for the extra fidelity of reproduction obtained by extending the a.f. range from about 4 kc/s (as is usual in medium-wave broadcasting) up to, say, 15 kc/s. Instead of the noise being about four times as great it is more like sixteen times. The relatively heavy noise in this extended part of the band competes with what is usually slight signal modulation, for at frequencies above about 4 kc/s there are usually only the harmonics that give characteristic tone to instruments and voices. So if they are systematically boosted in the transmitter there is little risk of their overmodulating it, and at the receiver they can be reduced to normal by a top-cutting circuit, which reduces the worst of the noise at the same time.

I explained this double process (pre-emphasis and de-emphasis) fully in the May 1947 issue, but as that is quite a long time ago perhaps I had better mention that the amount of boost and cut is rated (rather unexpectedly) in microseconds. This refers to the time-constant of the circuit used. For example, if the detector output voltage is applied to R and C in series (Fig. 10) and the a.f. is drawn from across C, at zero frequency the full detector output is passed on, but the upper frequencies are progressively cut. The turning frequency f_t (at which the loss is 3db) is when the reactance of C equals R ; i.e., $1/2\pi f_t C = R$, or $f_t = 1/2\pi CR$. CR is known as the time-constant, and the standard for British f.m. broadcasting is 50 microseconds (0.00005 sec.). Filling in this value for CR, f_t works out at about 3,200 c/s. The whole frequency characteristic given by this circuit is Fig. 11, from which one can see that if the top a.f. is 15 kc/s it is boosted 5 times at the transmitter, and cutting it down again to normal in the receiver achieves a 5-fold noise reduction at this frequency, and proportionately less at the lower frequencies.

I have already mentioned that f.m. allows a greater average signal output from a given transmitter, so that improves the signal/noise ratio from the other end, as it were. If all the other noise-reducing effects are also in operation, the net improvement over a.m. is very substantial. According to the ideal sort of theoretical comparison we have been making, it totals nearly 30 db, which is a signal/noise voltage ratio improvement of over 28 to 1, or a power ratio improvement of more than 800. In practice it means that an a.m. programme that would have an unpleasant amount of background noise would be quite quiet if changed over to wide-band f.m. In communication receivers, on the other hand, reception is intelligible when the signal strength is not much greater than noise, in which case the foregoing analysis does not hold, and the advantage of f.m. largely disappears.

The effect of motor ignition noise on receivers is quite different, so I shall have to hold it over until next month, when we shall also consider the f.m. receiver and especially the detector.

Wide-band Flexible Aerials

AERIALS which are mounted on vehicles for mobile radio-telephone transmission and reception are usually of the whip type in order to prevent damage by collision with trees or the top of a garage door frame. In addition, it is often necessary to have wide-band characteristics, since the transmitting and receiving frequencies may be as much as 13 Mc/s apart.

Wide-band characteristics may be obtained by increasing the diameter of the aerial, but this is incompatible with flexibility. These two differing requirements can, however, be met by the following method.

The aerial, which usually takes the form of a unipole, can in fact be made in the form of two or more unipoles set closely together and rising from a common base plate. The unipoles are fed from the centre of the base plate, from which they rise vertically. When more than two separate unipoles are employed, they may be mounted in a circular manner round the base plate, the unipoles lying parallel to one another. This arrangement is highly flexible, and the bandwidth can be increased enormously by increasing the number of unipoles.

In order to prevent the possible generation of noise signals when the ends of the unipoles are caused to collide either by vibration or by contact with, for example, an overhanging tree, the ends of the unipoles may be coated with rubber or other suitable compound.

(Contribution from E.M.I. Engineering Development, Ltd.)

Television at South Bank

Projection box at the Telekinema seen from the theatre. In the centre is the television projector behind which can be seen one of the two film projection windows. On the left is the transportable television remote-control unit.

AN important part is being played by television at the South Bank Exhibition; not only are demonstrations of large-screen projection television being given in the Telekinema but domestic receivers are operating in a number of the Pavilions. Programmes are derived in part from the normal B.B.C. programmes—the Alexandra Palace transmissions being received on a multi-element aerial attached to the Shot Tower—and local cameras are provided.

The distribution of television signals is by coaxial cable, the vision and sound carrier frequencies being those of the Sutton Coldfield transmitter, 61.75 Mc/s and 58.25 Mc/s. The vestigial-sideband system is used for vision and so the signals available from the cables are the same as those in the Birmingham area. Locally-produced signals are, of course, used to modulate what is, in effect, a miniature transmitter. The B.B.C. signals at the London frequencies are passed through a frequency changer to bring them to the Birmingham frequencies and then through a filter to change them to the vestigial-sideband form.

The general distribution is at radio-frequency for both sound and vision, except to the Telekinema, to which the sound is passed at audio-frequency. Coaxial cables of ¼in diameter with a solid aluminium sheath are used.

Arrangements are made for ten-minute transmissions for the domestic receivers with a five-minute interval signal derived from a monoscope, the switching being carried out automatically by a time-switch.

The cameras in the local studio use image orthicon tubes including a five-stage electron multiplier giving an output of 0.1 V. This form of tube was fully described in *Wireless World* for May 1950, p. 162.

The projection equipment used in the Telekinema has a 9-in c.r. tube operating at 50 kV and drawing 15 mA peak current. The normal mean current is about 1.5 mA, making the screen dissipation some 75 W. The screen is cooled by an airblast. A Schmidt optical system with an aperture of f/1.14 is used and has a spherical glass mirror of 27in diameter. The equipment is designed for operating with 405 or 625 lines, 50 frames, or 525 lines, 60 frames, but 405 lines is the standard adopted for the exhibition.

Spot wobble is used and the focus current is modulated at line and frame frequency to maintain proper focus over the whole picture area.

The results given by the whole installation are extremely good, both with local cameras and with B.B.C. programmes. The line structure is invisible and the picture detail over the whole area is exceptionally good, while the contrast range appears to be abnormally great. The brightness is quite adequate and, although rather less than that with film, one never felt during a lengthy demonstration any need of more. The demonstrations, for which a charge is made, include stereoscopic films and stereophonic sound, in addition to the large-screen television.

The distribution of the television signals throughout the Exhibition is carried out by Rediffusion, Ltd., the cameras in the Telekinema and their associated equipment have been provided by Marconi's W.T. Co., Ltd., and the projection apparatus by Cinema-Television, Ltd.

In addition to the demonstrations of both cinema and domestic equipment linked with the distribution system described above, a closed-circuit demonstration of 625-line television, with a vision bandwidth of 5.5 Mc/s, is staged on the second floor of the Transport Building. A new 6-lens C.P.S. Emitron camera with associated E.M.I. equipment is linked by a few feet of cable to two 12-in console receivers on which visitors can compare the received picture with the scenes below them.

Acoustics of the Royal Festival Hall

IT will be some time before the many acoustic measurements taken during the test and tuning period can be published and discussed, but it is now possible to give a subjective opinion on the main attributes of the new Royal Festival Hall on the South Bank Exhibition site.

The first test concert on February 14th, showed that railway noises and other sounds external to the hall were reduced by the double 12-inch cavity wall construction to levels well below the ambient noise inside the hall during pianissimo passages. Also that no major echoes occurred longitudinally and that the built-in absorptive ceiling resonators provided for echo suppression would not be needed and could remain blanked off.

To achieve clarity and definition in the musical sense, the hall was designed to give a high ratio of direct to reverberant sound, and in this respect the

hopes of the designers were realized in rather more than full measure. Without the accustomed proportion of ameliorating reflected sound many people were critical of the bareness of tone, and, rather unreasonably, of the undeniable fact that an orchestra is a collection of individual instrumentalists. Certainly the new hall will be very revealing of the quality of musicianship in the performance of passages of fine texture, and should prove a wonderful incentive to better orchestral playing.

"Tuning" of the hall on the results of the earlier concerts has been directed mainly to increasing the reverberation, which now seems to be satisfactory, at least as far as the higher frequencies are concerned, but inside the hall one feels that there is still room for some further filling out at lower frequencies.

Reproduction via radio may be quite different for at least three reasons: 1. The microphone position is unique. 2. The transmission is through a single channel, whereas the concert-goer normally has the advantage of binaural hearing. 3. The B.B.C. can modify tonal balance or even add, if they think it desirable, a trace of extra reverberation.

Listening to the first broadcast it was apparent that the extreme low-frequencies sounded fuller than in the hall, but the violins and the higher wood wind still dominated the orchestra. Judging from the relative weakness of violas and cellos one might hazard a guess that maximum absorption is centred somewhere in the region of 100-200 c/s. Orchestras will have to work much harder to produce a sustained tone in *legato* playing—they will get little help from the hall. After *staccato* chords the body of sound evaporates with unexpected rapidity and this is the inevitable price which must be paid for the clarity, which is the hall's outstanding merit.

No further alterations to the acoustics are to be made at the moment of going to press, but the position will be reviewed after six months or so of normal use and a thorough sifting of further fact and opinion. Summarizing first impressions the Royal Festival Hall gives the freshness of an outdoor performance while effectively excluding the weather and the noise of London.

Throughout the test period records of reverberation time have been taken by the acoustics staff of the Building Research Station (D.S.I.R.) on instruments installed in a mobile unit parked outside the hall. Sources of sound used included single tones, revolver shots (producing wide-spectrum "white" noise) and the now famous test using the opening bars of Beethoven's "Coriolanus" in which long rests follow *fortissimo* chords by full orchestra. The recorders which have a range of 35 to 120db were fed through amplifiers from condenser-type microphones in various parts of the hall, and selective filters were inserted when any particular frequencies were under investigation. It is hoped at a later date to give some results of these measurements in support (or refutation) of first aural impressions.—F. L. D.

Aluminizing Cathode-Ray Tubes

By S. R. NEUBERGER, M.A. (Cantab) and J. H. JUPE, A.M.I.E.E.

Many people tend to regard aluminizing in cathode-ray tubes as a kind of magic property that somehow improves the picture, without really understanding what it is and how it works. The subject is made to seem even more vague and uncertain by various technical controversies which have taken place, and at times it has even been questioned whether aluminizing is really necessary. What, then, is aluminizing and what does it aim to do?

WHEN talking of the aluminizing in a television cathode-ray tube, we mean an extremely thin film of aluminium deposited over the inside surface of the fluorescent screen. This film achieves several distinct advantages, the first being to prevent the occurrence of "ion burn." Some viewers may have noticed a dark patch in the centre of the screen, produced by ion burn. This patch, which becomes progressively worse during life, is caused by the ions from any residual gas in the cathode-ray tube reaching the fluorescent powder on the screen. The presence of the aluminium film prevents this from occurring, since the ions cannot penetrate the film, although the electrons continue to pass through easily and reach the powder in the usual way. The other advantages obtained by aluminizing the screen are:—

(a) Light that would otherwise be emitted by the powder backwards into the tube is reflected by the aluminium film and so reaches the viewer through the front of the screen.

(b) Since no light from the screen reaches the inside of the tube, there is no possibility of its being so reflected by the walls of the bulb as to arrive on a dark part of the picture.

Together, therefore, the above two factors ensure that the aluminized screen shows a considerably improved contrast.

(c) The occurrence of "high voltage rash," the name given to the dark spots which sometimes appear on a television screen, is prevented. These spots tend to appear at places on the screen having a lower secondary emission than is found elsewhere. This difficulty can largely be overcome by making the phosphor powder as homogeneous and as pure as possible, but the presence of the aluminium is a further safeguard, since it holds the voltage of the whole screen area at the same level.

(d) The aluminium film raises the voltage of the screen to that of the final anode, which again means that the maximum possible efficiency, i.e., the maximum brightness, is obtained from the screen.

In order to fulfil these five important functions satisfactorily, the aluminium must be present as an extremely thin, strong, continuous film with a smooth

Part of a multi-head processing machine, showing a tube lit up by the vaporization of aluminium inside. Applied to its face is the measuring head of the automatic thickness-control apparatus.

and highly reflecting surface. The thickness of the film is particularly critical, for it must be thick enough to act as a barrier to the incident ions and yet so thin that it does not absorb too much of the beam energy. If this occurred, the brightness of the picture would be reduced by an amount that cannot be offset by the reflecting power of the film. It has been found that the required thickness of the film is about 0.1 micron (or 4×10^{-6} inches), and to produce a consistently good film with all the specified properties on the back of a powder screen is a difficult matter. The first step is the preparation of a smooth continuous surface, on which the aluminium vapour may condense. The techniques now generally in use for this are all based on forming a film of an organic lacquer that stretches tightly over the inside of the phosphor coating and is in intimate contact with it. Aluminium is then evaporated *in vacuo* and deposited on the lacquer film, which is itself subsequently removed during a baking process.

An apparatus has been developed at the Research Laboratories of The General Electric Company that will measure and control the thickness of the aluminium film while it is being deposited. This equipment consists essentially of a variable radio-frequency thermionic valve oscillator, the inductive coil in the tuned circuit of which is mounted in a measuring head. When the measuring head is brought close to the centre of the aluminium-backed screen, a change in the frequency of oscillation of this tuned circuit is produced.

The capacitance in the tuned circuit is varied so that the frequency of oscillation returns to its original value. The frequency-indicating device is a fixed r.f. oscillator, which is caused to beat with the output from the variable frequency oscillator, producing an audio frequency output that is applied to a loudspeaker or headphones. The change in capacitance required to produce zero beat frequency is a measure of the thickness of the aluminium film. A refinement in technique makes this device capable of automatically controlling the thickness of the aluminium film during deposition. The measuring head is held against the unaluminized screen and the measuring capacitance set to the required figure. Evaporation is commenced and the evaporating source is shut off automatically when the beat frequency falls to zero.

NEWS FROM THE CLUBS

Brighton.—Members of the Brighton and District Radio Club will hold an "inquest" on the National Field Day (June 2nd and 3rd) at their meeting on June 5th. Meetings are held every Tuesday at 7.30 at the Eagle Inn, Gloucester Road, Brighton, 1. Sec.: R. T. Parsons, 14, Carlyle Avenue, Brighton, 7.

Bromley.—Meetings of the North-West Kent Amateur Radio Society, the president of which is W. S. Scarr (R.S.G.B. president), are held on the first Friday of each month at 8.0 at Shortlands Tavern, Station Road, Shortlands, Bromley. Sec.: M. J. Frost (G3GNL), 15, Northbourne, Hayes, Bromley, Kent.

City of London.—"50 Years of Recorded Music" is the title given to a programme of cylinder and disc records (1900-1950) to be presented by R. H. Clarke to members of the City of London Phonograph and Radio Society on June 5th. Meetings are held at 6.30 at the "Cock and Magpie," 72, Wilson Street, London, E.C.2, on the first and third Tuesdays of each month. Sec.: R. H. Clarke, 12, Grove Road, North Finchley, London, N.12.

Gillingham.—The Gillingham Telecommunications Society's transmitter, G3GTS, is now fully licensed for telephony and 150 watts and QSL cards have been provided by the Borough Council. Meetings are held on alternate Tuesdays at 7.30 at the Medway Technical College, Gardiner Street, Gillingham. Sec.: C. E. Pellatt, 101, Boundary Road, Chatham, Kent.

Newbury.—The Newbury and District Amateur Radio Society will be manning a stand at the Arts and Handicrafts Exhibition to be held in the Newbury Corn Exchange from June 12th to 16th. A transmitter using the secretary's call sign, G3CJU/A, will be in operation as often as possible and on as many bands as possible. Sec.: A. W. Grimsdale, 164, London Road, Newbury, Berks.

Portsmouth.—The two clubs listed in our January issue under Portsmouth are no longer operating as separate entities. The title adopted is the Portsmouth and District Radio Society, meetings of which are held on Tuesdays at 7.30 at the Signal Club, Royal Marine Barracks, Eastney. Sec.: R. Short (G3AFF), 76, Roman Grove, Portchester, Hants.

Sidcup.—Meetings of the Cray Valley Radio Transmitting Club are held on the fourth Tuesday of each month at the Station Hotel, Sidcup, at 7.30. Sec.: A. Swindon (G3ANK), 135, Station Road, Sidcup, Kent.

Taunton.—At a recent meeting of the West Somerset Radio Society it was decided to change the title to Taunton and West Somerset Radio Society. Meetings are held on the first Tuesday of each month at 7.45 at the Castle Hotel, Taunton. Sec.: K. Farrell, 27, Victory Road, Taunton, Som.

Tyneside.—In addition to the three groups of the International Radio Controlled Models Society at Birmingham, London and Manchester given in our Directory of Clubs (January issue) there is also a section on Tyneside which meets regularly. Sec.: A. S. Wilson, "Cragside," Fatfield, Washington, Co. Durham.

Watford.—At the meeting of the Watford and District Radio and Television Society on June 5th at 7.30 at the Cookery Nook, The Parade, Watford, R. L. Gardiner (G6GR) will speak on "Test Gear." Sec.: R. W. Bailey, 32, Cassiobury Drive, Watford, Herts.

SHORT-WAVE CONDITIONS

April in Retrospect: Forecast for June

By T. W. BENNINGTON*

DURING April the average maximum usable frequencies for these latitudes decreased somewhat by day, and increased somewhat by night, which variations were in accordance with the seasonal trend.

Daytime working frequencies were, on the whole, decidedly low. In east/west directions the best received daytime frequencies were of the order of 17 Mc/s, and those around 22 Mc/s were usually weaker. Only very occasionally were frequencies higher than 22 Mc/s received. In north/south directions frequencies of the order of 24 Mc/s were frequently the best received during the daytime. At night 9 Mc/s was usually workable until well after midnight, and on north/south circuits frequencies considerably higher than this were usable at that time.

There was an increase in the amount of Sporadic E observed during April. Sunspot activity was, on the average, considerably higher than for several months past. On 18th a giant sunspot crossed the sun's central meridian, and following this there was a period of ionospheric storminess.

April was a very disturbed month, the stormy periods being 3rd-11th, 19th-22nd and 26th-27th. Seven Dellinger fadeouts were reported, two of them being of severe intensity. These were on 19th, 1505-1730 g.m.t. and on 25th, 0841-0945 g.m.t., the latter completely interrupting communications for a time.

Forecast:—During June the daytime m.u.f. for these latitudes will probably reach its lowest, and the night-time m.u.f. its highest, value for the coming summer season. Thereafter the daytime m.u.f. should begin to increase, and that for night-time to decrease again, towards the winter values.

Working frequencies for long-distance communication are likely to be relatively low during the daytime over all circuits, and more particularly over those running in east/west directions from this country, where 15 Mc/s may be the highest regularly received frequency. Over north/south circuits 21 Mc/s should be the highest regularly usable frequency during the day.

At night 11 Mc/s should be usable till after midnight, and 9 Mc/s the night through.

Sporadic E is likely to be very prevalent, and 28 Mc/s and possibly much higher frequencies may be propagated to medium distances by way of this. Normal communication over medium distances will be controlled during the day by the E or F_1 layers, and usable frequencies for this purpose should be somewhat higher than during the previous month.

The accompanying curves indicate the highest frequencies likely to be usable over four long-distance circuits from this country during the month.

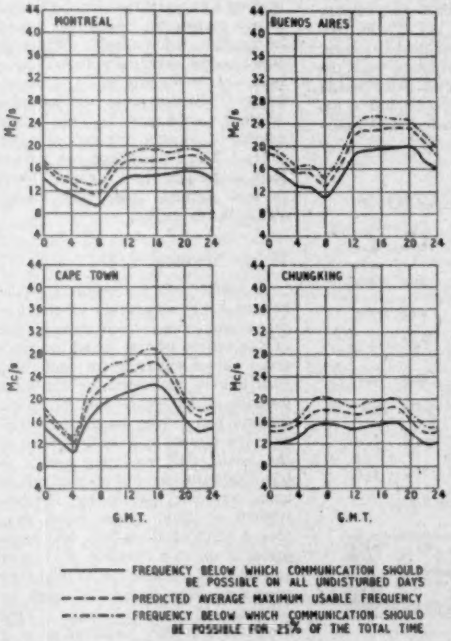
MONTREAL
BUENOS AIRES
CAPE TOWN
CHUNGKING
Mc/s
G.M.T.
FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE ON ALL UNDISTURBED DAYS
PREDICTED AVERAGE MAXIMUM USABLE FREQUENCY
FREQUENCY BELOW WHICH COMMUNICATION SHOULD BE POSSIBLE FOR 25% OF THE TOTAL TIME

* Engineering Division, B.B.C.

TRIX Quality

SOUND EQUIPMENT

MODEL R.E.48

Reflex HORN SPEAKER

This is a heavy duty reflex type horn speaker suitable for both speech and music reproduction, having an air column 48in. in length, with flare diameter of 25in., thus providing a weatherproof horn of excellent performance for all public address work.

The horn is of novel construction incorporating a solid alloy casting at the base giving exceptional strength and rigidity. It is supplied complete with heavy steel swivelling stirrup, and is suitable for permanent installations in positions where a weatherproof speaker is essential as well as taking up a good deal less space than an equivalent straight horn.



MODEL E.M.3

MIXER–TONE CONTROL Unit

Another outstanding addition to the TRIX range of high-quality sound equipment—an improved design 3-way mixer pre-amplifier unit combined with tone controls for bass and treble boost. Inputs are provided for two microphones and one gramophone circuit, operating into a pre-amplifier stage with two individual tone controls. This model can be used with any of our standard AC amplifiers such as T613B, T633B, T663B, etc.

Full details of these and other models in the large Trix range of sound Equipment available on request. Send for latest catalogue and price lists.

THE TRIX ELECTRICAL CO. LTD.
1-5 Maple Place, Tottenham Court Road, London, W.1.
'Phone: MUSeum 5817
Grams & Cables: "Trixadio, Wesdo, London."

AMPLIFIERS MICROPHONES LOUDSPEAKERS

RANDOM RADIATIONS

By "DIALLIST"

Radio Shows To-day

ONE DOES NOT EXPECT any kind of radio exhibition to-day to provide the thrills and adventures that show-goers looked for in the days when wireless and electronics in general were still very young branches of physics and engineering. You remember, perhaps, the year when the first mains sets were shown? Or the screen-grid valve year? Or the pentode year? Or the c.r.t. television year? Wireless is grown up and settled in life now; and the younger brother, television, is no longer a child. Neither now makes progress by spectacular leaps and bounds. Both *do* continually make progress and no exhibition is without its highlights; but steady, regular development has now largely replaced the exciting forward jumps—sometimes jumps in the dark!—of the past. Hence, when I went to the Components Show I didn't expect to gape at some new wonder here or to gasp at another there. Come to think of it, whilst wireless and television have been doing their growing up I haven't been getting any younger myself. . . . Is it possible that the advances year by year are no whit less spectacular than they once were and that it is I, rendered less impressionable by the hand of time, who am no longer made to gape and gasp by stimuli that would have been adequate for the purpose in years gone by? Perish the thought!

Good Stuff

IF I FOUND nothing at the R.E.C.M.F. Show sufficiently startling to give rise to bated breath or a quickened pulse, I most thoroughly enjoyed my visit. In fact, I came away wishing that a few American technical writers had been with me so that I could have shown them what good stuff we produce. I met, though, quite a few friends and acquaintances from other countries abroad and found most of them loud in their praises of two outstanding qualities of our radio components: their good design and their good finish. I couldn't agree more! It's not for me to report in detail on the Show; but I must mention just one or two things that fascinated me. First, the tiny dry batteries for hearing-aids. One of these (15 volts) weighs under half an ounce and three of them placed side by side occupy rather less volume than an ordinary matchbox. There's a 22½-volt battery, too, which weighs ¾ ounce; allowing for the insulation and the case, each of its 15 cells must weigh about one gram! It was good to see the first British-made metal-glass c.r.t. for television receivers. A very handy design, for it is literally nearly as broad as it's long—a 16-inch screen for an overall back-to-front length of 17½ inches. I have room to mention only one more item, the new range of valves designed with an eye to improved mechanical reliability. The principles are sound and I think that the valves should make a name for themselves There is one thing, though, that we all want in valves besides mechanical reliability: can't manufacturers see their way to giving us a little more than the average 1,000 hours of service for our hard-earned money?

Médecin Malgré Lui

ONE OF THE VISITORS from abroad whom I met at the R.E.C.M.F. Show was my good friend Georges Friedrichs, who should be one of the happiest of men since he lives and runs his famous measuring instrument factory in the lovely High Savoy town of Annecy. A day or two after his return home I heard from him that he was sending me samples of a small 3-volt battery of French make, which was reputed to be of outstanding performance. The French, by the way, preserve the Voltaic tradition by calling a battery *une pile*. As he hadn't told me the trade name I amused myself by making a guess or two, for the French have a passion for English (or would-be English) trade names. When the small parcel eventually turned up it bore, to my surprise, a Customs label: "Inadmissible as samples. Medical appliances." The parcel proved to contain just two tiny batteries. The French had run true to form in their choice of a name. There it was printed large upon each: PILE WONDER.

Who Started It?

A WHILE AGO I thought I would like to know something of the history of soldering, which must be one of the oldest of the metal worker's arts. Silver soldering (or something very like it) was used by Egyptian jewellers 6,000 years ago, or more; brazing was known to them as well as to the Greeks and the craftsmen of the East. Soft soldering seems to have been the latest of all methods to come into use. When the Romans wanted to make water pipes they took a strip of sheet lead and hammered it on to a mandrel of circular section. Until about A.D. 200 they appear to have closed the seam by pouring in molten lead. One imagines that they used tallow as a

ASSOCIATED ILIFFE TECHNICAL BOOKS

"WIRELESS WORLD" PUBLICATIONS

	Net Price	By post
RADIO VALVE DATA: Characteristics of 2,000 Valves and C.R. Tubes. 2nd Edition. *(To be published during June)*	3/6	3/9
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 3rd Edition	18/-	18/8
SHORT-WAVE RADIO AND THE IONOSPHERE. T. W. Bennington. 2nd Edition	10/6	10/10
WIRELESS SERVICING MANUAL. W. T. Cocking, M.I.E.E. 8th Edition	12/6	12/11
RADIO LABORATORY HANDBOOK. M. G. Scroggie, B.Sc., M.I.E.E. 5th Edition	15/-	15/6
BASIC MATHEMATICS FOR RADIO STUDENTS. F. M. Colebrook, B.Sc., D.I.C., A.C.G.I. 2nd Edition	10/6	10/10
WILLIAMSON AMPLIFIER: Articles on Design of a High-quality Amplifier	3/6	3/9
RADIO DATA CHARTS. R. T. Beatty, M.A., B.E., D.Sc., 5th Edition—revised by J. McG. Sowerby, B.A., M.I.E.E. ...	7/6	7/11
TECHNICAL INSTRUCTION FOR MARINE RADIO OFFICERS. H. M. Dowsett, M.I.E.E., F.Inst.P. L. E. Q. Walker, A.R.C.S. 9th Edition	60/-	61/-

A complete list of books is available on application

Obtainable from all leading booksellers or from

ILIFFE & SONS LTD., Dorset House Stamford Street, London, S.E.1.

flux and that they sealed off with the help of the blow pipe and the wiping cloth. The earliest genuine soft-soldered joint of which I can find any record is the seam of a Roman pipe found at Silchester. Curiously enough, the solder here is the very opposite of that used by a modern plumber for making a wiped joint; it is about 66/34, which is not far from tinman's solder to-day. Although W. R. Lewis most kindly gave me the run of the extensive (and magnificently catalogued) library of the Tin Research Institute, I can find very little about the materials or the methods of ancient solderers. I shall be most grateful to any reader who can send me any information.

Puzzling

THE ANSWER TO THE following problem is, very likely, quite simple. I confess, though, that it eludes me; nor have I so far obtained a satisfactory solution from any of the many people to whom I have put it verbally. Here it is. In one room I have a 4-valve battery set, whose 2-V filament accumulator is permanently connected to the output terminals of a Varley trickle-charger, the main components of which are a step-down transformer and a metal rectifier. The input terminals of the charger are connected via a 2-foot length of good flex to a wall-socket served by a 200-V a.c. mains lighting circuit and incorporating a switch on the phase lead. Wired across the output of the socket (and the input to the charger) is a 200-V miniature neon, used as a tell-tale. You see the idea? Mrs. Diallist, who prefers battery receivers for reasons which I do not pretend to understand, cannot (as otherwise she might) let the accumulator gas its head off; for there is the red eye of the little neon to remind her that she switched on the current at bed-time the night before and that it is about time to switch off. You can tell the state of the accumulator pretty well from the time that the neon takes to strike. If the cell is well up, the little lamp "fires" as soon as you close the switch, but if it is not, lighting-up is delayed for some seconds. Once when we had been away for a fortnight and no charging had been done, the interval by my watch between switching on and striking was 50 seconds. Can anybody, please, tell me why the state of a 2-V, 20-Ah cell, charging normally at 0.5 A, should affect the striking of a neon connected straight across the lighting mains supplying its charger?

E·S·CAP FUSE AND FUSE-HOLDERS

AMONGST the extensive range of **BULGIN** Fuses and Fuse-holders will be found the **Edison Screw-cap Fuse** and a variety of fuse-holders to suit. Made to dimensions, fits and tolerances of B.S. 98/E.27

E.S.-CAP SCREW-IN FUSES

THESE units, as almost universally employed in Continental Europe and the Americas, have bright-brass screw caps to B.S.98/E.27, for which a selection of holders is shown on right. With black moulded knurled rim, of thermo-setting plastic, and mica-window over legended label. Visible element, shows clearly and instantly when blown. Suitable for domestic installations, cookers, washers, kinematographs, electronic-apparatus, etc. Made in a wide range of ratings of 1,000-hour carrying capacity at 16° C., and blowing in > 1 sec. at 150-250% of carrying-rating. Knurled Rim ø, 1⅛in.; overall length, 1⅝in. 1 amp. to 22 a., 450 to 100 v.

List No. E.S.2



List No. E.S.3

List No. E.S.4

List No. E.S.1

List No. E.S.1. Moulded-shrouded socket, with 2×4 B.A. emergent stems, ⅜in. free length, and two S.E.B.P. gasket plates. Fixing is by the stems at ⅛in. c.r.s. To be bushed as required on metal mountings.

List No. E.S.2. Skeletonised type, with highest-grade S.R.B.P. base. Fitted with silver-plated solder-tags. Fixing: 2×⅛in. clear at 1⅛in. c.r.s. For use up to 250 v. circuital, 500 v. to E.

List No. E.S.3. Is the same type of Fuse-holder as List No. E.S.2. but fitted with Highest-grade moulded black thermo-plastic screw-on shroud. **Note.**—Shroud cannot be supplied separately.

List No. E.S.4. Moulded-shrouded socket, sunk mounting. Shroud is moulded in thermo-setting "Bakelite." Metal parts are highly Nickel-plated. Fixing: 2×4 B.A. clear at 1⅛in. c.r.s., central clear hole 1⅛in. ø.

WRITE NOW FOR CATALOGUE NO. 185/*WW*
PRICE 1/- POST FREE.

MANUFACTURERS OF RADIO & ELECTRONIC COMPONENTS

BULGIN *Components*
A. F. BULGIN & CO. LTD
BYE-PASS ROAD BARKING
TELEPHONE

UNBIASED

By FREE GRID

Seeking sanctuary.

The Fires of Smithfield

I SEEM to have raised a hornets' nest about my ears by my request in the April issue for verification of the date when de Forest evolved the amplifying valve which I said I had always thought to be 1912 but now doubted. So fierce were the execrations of the mob who demanded my head on a charger for writing 1912 when I ought (so they maintained) to have written 1907, that I went scurrying along to the sanctuary of that storehouse of scientific statistics, the Science Museum at South Kensington.

As the result of my visit there I now follow the example of Cranmer and withdraw my recantation and if, as the outcome of this, the fires of Smithfield and Oxford are to be rekindled, I take comfort in the fact that my stake will be shared by the pundits of the Science Museum.

Unfortunately I owe these base attacks on my veracity as a scientific historian to the fact that, led astray by Shakespeare and similar hack writers, I tried a bit of "elegant variation" instead of sticking to plain English when wording my original question. For this, and for this alone, I bow my head in shame and cry "*Peccavi*" which is, I suppose, best translated by the classic phrase "I dunnit."

What I ought to have asked is when did de Forest evolve the amplifying valve, instead of which, with misleading "elegant variation," I asked when he put the grid into Fleming's diode. Abundant evidence about this has been sent to me and to the Editor, but for clarity and conciseness I have found nothing to beat the potted histories attached to the exhibits in the Science Museum. The truth of the matter is that de Forest stuck the grid into Fleming's diode on January 29th, 1907, or, at any rate, that was the date of his patent. It is quite clear, however, that de Forest failed to appreciate the importance of his own invention and, to quote the words of B. S. T. Wallace in the *Telegraph and Telephone Journal* (March, 1932) "de Forest apparently did not fully understand the working of the grid at the time he took out a patent for it in 1907." The learned scribe at the Science Museum, after pointing out that de Forest actually allowed his British patent to lapse in January, 1911, makes it plain that it was not until 18 months later, in July, 1912, that he woke up to the fact that what he had invented was an electronically operated relay or, in other words, an amplifying valve.

A Date for Your Diary

DESPITE my efforts to secure St. Michael as the patron saint of radio (March issue), I see in *The Times* that the Archangel Gabriel has been appointed patron saint of telegraphists and telephonists. Naturally these words cover both wired and wireless telegraphy and telephony. I really don't see, however, why I should be compelled to share a patron saint with the peroxided blondes at the local telephone exchange, but I suppose I can do nothing about it. I have no mind to receive a severe rap over the knuckles such as was given to French wireless operators over twenty years ago when they chose St. Joan of Arc as their patron saint and were accused of usurping the functions and privileges of high ecclesiastical authority.

For those of you who are ignorant of these matters I would point out that March 18th is St. Gabriel's day.

Silent Sound

IN June, 1949, when administering a gentle rebuke to Mr. Punch for his unconscious plagiarism of something which had appeared in these columns ten years earlier, I remarked that there were few major inventions in the realm of radio and electronics which had not been anticipated in these columns. I ought to have added acoustics and a host of other "ics" which come within the scope of this journal. I gladly permit inventors to use, without let or hindrance, ideas which I put forward, and I certainly seek no sordid monetary gain, otherwise I should not publish them in these columns without obtaining the prior protection of the Patent Office. I do object, however, to these aforesaid "inventors" getting the ear of some gullible reporter on the staff of one of our great "dailies" and claiming as original an idea which has appeared in these columns many years previously.

The latest instance of this sort of thing appeared not so very long ago in one of the popular London daily newspapers. The news item was considered sufficiently important to warrant the use of valuable space for a photograph of the inventor and his brain-child which was something of a very trivial nature invented by me in a moment of exasperation no fewer than seventeen years ago and published complete with sketch in these columns on June 29th, 1934. I reproduced the sketch in the issue of June 23rd, 1938, on the occasion of the plagiaristic "re-invention" of the device by somebody else and I make no bones about reproducing it again.

As you will gather from the sketch, it is merely a device consisting of a microphone inside a soundproof piano and coupled to a pair of headphones whereby pianists in the embryonic stage are compelled to consume their own noise, so avoiding annoyance to other people. A simple switching arrangement brings an amplifier and loudspeaker into circuit when it is desired to use the piano normally. To extend this idea to other musical instruments as has now been done, is merely to do the obvious.

Consuming their own noise.

NEW RC/PA/U

REMOTE CONTROL PRE-AMPLIFIER

NOTICE

"POINT ONE" is the Trade Mark of H. J. Leak & Co., Ltd. It was originally applied to the first power amplifiers having a total distortion as low as point one of one per cent, when, in June 1945, H. J. Leak, M. Brit. I.R.E., revolutionised the performance standards for audio amplifiers by designing the original "POINT ONE" series.

£8 . 15 . 0

For use *only* with LEAK "POINT ONE" AMPLIFIERS

A Leak two-stage feedback tone-control pre-amplifier of negligibly low distortion in which resonant circuits or resonant filters are not used. This pre-amplifier is a complete re-design, electronically, of the original RC/PA and of the modified versions supplied to the U.S. market during the past year. The RC/PA/U will meet world conditions of use, and it embodies not only the best features of the previous models but every refinement suggested by users in Britain and the U.S., with additions considered desirable by ourselves.

Input Control. A five-position switch selects :—

1. Microphone (or other source). Response, level. Sensitivity, 3mV. r.m.s. Input resistance, 200,000Ω.
2. L.P. Records, with built-in equalisation for new Decca and Columbia (U.S.) records. Sensitivity, 15mV. r.m.s. Input resistance, 100,000Ω.
3. 78 r.p.m. Records, with built-in equalisation for British characteristics.
4. 78 r.p.m. Records, with built-in equalisation for American characteristics.
5. Radio (or other source). Response, level. Sensitivity, 50mV r.m.s. Input resistance, 100,000Ω.

Treble Control. A seven-position switch allows the choice of accurately determined boosts and losses on all inputs.

Bass Control. A seven-position switch allows the choice of accurately determined boosts and losses on all inputs.

Volume Control with A.C. ON-OFF switch to permit switching of the remotely placed power amplifier.

Panel Light as a visual reminder.

Total Harmonic Distortion : 0.02% approx.

The sensitivities relate to 10 watts output at 1,000 c/s, with the tone-controls level, when coupled to the TL/12 power amplifier which provides the heater and anode supplies.

These amplifiers are those used by H. J. LEAK when giving the most recent of his demonstrations between a reproduced orchestra and (two minutes later) the live orchestra in the lecture theatre.
The amplifiers can be used for disk recording with the assurance that total amplifier distortion will certainly be no greater than that obtaining in the major studios of the world.

★ FOR YOUR LIBRARY ★

A new booklet by H. J. Leak, M.Brit.I.R.E., describing the above amplifiers and containing much information of technical value to those interested in recording and reproduction in the professional and amateur fields.

WILL SHORTLY BE AVAILABLE—
REGISTER YOUR NAME NOW
FOR FREE BOOKLET W/U

"POINT ONE" TL/12 12 watt Triple Loop Feedback Amplifier
£25 . 15 . 0

H. J. LEAK & CO., LTD. (Est. 1934)
BRUNEL ROAD, WESTWAY FACTORY ESTATE, ACTON, W.3

Phone : SHEpherds Bush 1173/4
Telegrams : Sinusoidal, Ealux, London
Foreign Cables : Sinusoidal, London

UNIVERSITY RADIO

Offer Guaranteed Used Equipment at Attractive Prices

Hambander Comm. Receiver with speaker. As new..... £15 0 0
B.P.L. Signal Generator, A.C. 200/250 volts. As new..... £11 0 0
Sound Sales (1949) P.M. Speaker As new £3 0 0
Avo (1948) Signal Generator. As new £12 0 0
Avo Valve-Testers (1948-49). As new £12 0 0
Collaro Centre-drive A.C. 'Gram motors, as new. With 12in. turntables £4 10 0
Universal Avo Minor. As new £7 0 0
Eddystone 640 Receiver, complete with valves, perfect and as new £22 0 0
Hunt's Resistance Capacity Bridge, model CRB, perfect and as new £10 10 0
Taylor Circuit Analyser, model 20A, perfect and as new £11 10 0
Avo model 40, as new..... £12 10 0
Avo model 7, as new..... £14 10 0

Hambander Receiver with Hambander Pre-selector, A.C. 200-250 volts. As new £19 10 0
Hallicrafters Sky Chief, A.C. 200-250 volts. Complete and perfect £12 10 0
Cossor Impedance Bridge, model 3389, A.C. 200-250 volts. Complete and perfect £16 10 0
SX28 Receiver with Hallicrafters speaker to match. Perfect and as new £42 10 0
L.S.L. Valve-Analyser and A.C./D.C. Test-Meter combined. Complete with charts. Brand new... £9 10 0
Marconi CR-100, complete and as new £27 10 0
National 1 to 10A Receiver, A.C. 110-250, complete with National Power-pack, and National matching Speaker. As brand new, with all Coils £25 0 0
Taylor A.C./D.C. Test-Meter, model 90A, as new £9 10 0

Panoramascope (U.S.A.) Panadaptor, for use with SX28, AR88, or similar Receivers, A.C. 100-240 volts. Complete and perfect £21 0 0
Cossor Ex-W.D. Single-beam 'Scope. A.C. 200-250 volts. Type II. Complete and perfect £14 0 0
G.E.C. Miniscope, complete and perfect £13 10 0
Labgear Electronic Fault-Tracer (1948-49). As new £15 0 0
BC-221 Frequency Meters, complete and as new £17 10 0
Decca (pre-war) portable all-wave Radiogram, complete and perfect. A.C. 200-250 volts £12 10 0
Brierley Pre-amplifier and Tone Control Unit for use with Brierley Ribbon Pick-up. Perfect. As new..... £8 0 0

WE NEED GOOD USED EQUIPMENT URGENTLY
PLEASE SEND, BRING OR PHONE FOR OFFER

Avo model 7 complete with leather case. as new..... £16 0 0
Triplett (U.S.A.) Valve-Tester in portable case, complete and as new, with all charts £13 0 0
Ex-W.D. type 8 stabilised voltage Power-pack, in perfect condition and working order... £18 10 0
Ex-W.D. Avo Meter, A.C./D.C. As model 40. As new..... £9 10 0
Taylor Resistance Capacity Bridge. As new £8 0 0
Philips PCR-1 Communication Receiver, with A.C. power-pack, perfect, as new..... £13 10 0
Valradio Converters 50 or 75 cycles, works overhauled, 200-250 D.C. to 200-250 A.C., at 300 watts £11 10 0
Pullin Series 100 A.C./D.C. Test Meter, as new £8 10 0
S.P. Wandertone 16 mm. Sound on film Projector, complete with Speaker and all leads. In perfect condition and working order. A.C. 200-250. Ready to use £39 10 0
Wharfedale Twin Speakers, in Wharfedale corner cabinet, latest model. Perfect and as new £38 10 0
Taylor 45B Signal Generator, as new £11 10 0
Siemens 16 mm. Silent Projector, complete and ready to use. 300-watt lamp. In perfect working order £28 10 0
Ardente 30-watt Amplifier, A.C. 200-250 volts. M/c Mike and 'Gram inputs, variable impedance output. Chassis and valves perfect and complete, ready to use £12 10 0
Sound Sales DX plus 1 Radio Feeder Unit, 3 wave-band. Variable selectivity. As new... £12 0 0
Advance B3 Signal Generator. 100 kc/s to 30 megs. (Cost £25). Our price as new £14 0 0

Goodmans Audiom 60, in Goodmans Phase-inverter Cabinet, unpolished, as new £12 0 0
Vortexion Gramophone Reproducer, A.C. 200-250 volts complete with all valves, in metal case. As new £15 0 0
Leak Tuner-Unit, latest model. As new £23 10 0
Weston Valve-Analyser Adaptors for all Weston Test-meters. Per set £5 0 0
Wilkins & Wright Coil Pickups complete with equaliser, as new £4 15 0
Leak Pick-up, 1950 model, complete with equaliser. As new... £7 0 0
E.D.C. Rotary Converter. 220/240 D.C. to 220/240 A.C. Complete with filter unit in metal cabinet. 120 watts. Perfect..... £12 0 0
As above, 200 watts £16 10 0
As above, 110 D.C. to 230 A.C., 200 watts £17 10 0
Marconi U.H.F. Signal Generator, type TF517E, complete with built-in power-unit, 200-250 volts A.C. type TM2571/c. Range 110-300 mc. Perfect £22 0 0
Collaro Microgram 1949-50 model, A.C. 200-250, as new... £16 0 0
As above, 1948 model, as new... £12 10 0
Parmeko 12 volt D.C. 10 watt Amplifier with hand mike. Complete and perfect £19 10 0
B.S.R. L.050A Audio Oscillator. As new £32 0 0
Decca L.P. Record-Player, in portable case. As new..... £8 0 0
U.S.A. Portmatic portable A.C./D.C. Radiogram, auto-change. In hide portable case. As new £21 0 0
Romac 25 watt Amplifier, with M/c mike and gram inputs. Variable impedance output. Complete with all valves. As new £18 10 0
Pre-war Garrard 8 Record Changer in polished table-cabinet. A.C. 100 to 250 volts. Perfect £9 0 0

M.S.S. (1947-8) Disc Recording Deck, complete with M.S.S. amplifier pre-amplifier, complete and perfect ready to use with S.T.C. Ball and biscuit mike. A.C. 200-250 volts. Cost over £200. Our price as new..... £84 0 0
Barker 14B Speaker. As new ... £9 0 0
Barker 14BA. As new £10 0 0
B2 RX/TX. As new, complete with A.C. Power-Pack 200/250 volts £18 10 0
Ultra (1949) All-wave Table Radiogram, A.C. 200/250 volts. As new £17 10 0
Mullard Master Valve-Tester, with 300 cards. As new £15 10 0
Various Radiogram Cabinets. As new. From, upwards..... £7 0 0
Magnavox 66 Speaker, mains energised. As new £5 10 0
Magnavox Duode 33, mains energised. As new £4 10 0
Advance Constant-voltage Transformer, 200-250 volts, 150 watts. As new £7 10 0
Venner Clock-work Time-Switch, 200-250 volts A.C. 50 amps. As new £8 0 0
Venner as above, 30 amps £6 0 0
Mullard Oscilloscope Unit, A.C. 200-250 volts. Perfect £7 10 0
R-1154 Transmitter, complete with valves, less power-pack. As new £11 10 0
Taylor Universal Test-Meter, model 83A, 4,000 O.P.V. Perfect £7 0 0
Taylor 85A A.C./D.C. Test Meter, 20,000 O.P.V. As new... £13 10 0
Avo Electronic Valve-Tester, as new. Latest model £36 0 0
Avo wide-range Signal Generator, latest model. As new £23 0 0
Avo Valve-Voltmeter, latest model. As new £23 0 0
B.T.H. RK Senior Speaker, mains energised, 12in cone. As new... £4 0 0

THESE ITEMS ARE ONLY A SMALL SELECTION FROM OUR STOCK OF EQUIPMENT. YOUR ENQUIRIES FOR ANYTHING THAT YOU MAY NEED WILL BE WELCOME WE HAVE OTHER EQUIPMENT ARRIVING DAILY!

Stamped addressed envelope, please.

CASH OR CHEQUE WITH ORDERS. ALL ITEMS LISTED ARE CARRIAGE EXTRA

22 LISLE STREET, LEICESTER SQUARE, LONDON, W.C.2

OUR BRANCH AT 39a (opposite) IS OPEN ALL DAY THURSDAY

Phone: GERrard 4447, 85u2 and 5507. Hours 9 to 6. Thursdays 9 to 1

PREMIER RADIO COMPANY

MORRIS & CO. (RADIO) LTD.

MOVING COIL METERS
All 2½in. outside diameter.

50 m/a ..... 8/6 40 amp. 7/6
20 amp. ..... 7/6 40 v. 5/9
20 v. 5/9
All 3½in. outside diameter.
30 m/a 10/6
Thermocouple meters :
3 amp. ..... 5/- 3.5 amp. 5/-
3½in. 2 amp. ... 8/6
Electrostatic ditto, SK, 4½in. 50/-

METAL RECTIFIERS.
Bridge type :
2 v. .5 amps. ... 2/- 6 v. 1 amp. 4/-
12 v. 1 amp. ... 8/- 12 v. 4 amp. ... 17/6
Half wave :
260 v. 30 m/a ... 4/- 300 v. 75 m/a 5/-
E.H.T., Pencil Type :
Output 650 v. 1 m/a., 4/7 each.
1,000 v. 1 m/a., 6/- each.
Outputs given are half wave. Two of either Rectifiers can be used in voltage doubling.

CRYSTAL MICROPHONE.
An entirely insulated crystal microphone which can be safely used on A.C./D.C. amplifiers. High impedance. No background noise, really natural tone. The ideal Mike for tape, wire and disc recording and sound projectors. **Price 22/6.**

R.107 RECEIVERS in partly dismantled condition. A wonderful spares investment for R.107 owners. 50/- each. Only available to callers.

POWER PACKS, input 200-250 v., 50 cycles. Output 330 v. 60 m/a, 6.3 v. 2-3 amp. and 6.3 v. .3 amps for 6 × .5 rectifier. Mounted on metal chassis approx. 6×6in., fully smoothed. 19/6 each ; 6×5 rectifier, 8/6 each.

WELDING OR GROUND HEATING TRANSFORMERS. Input 230 v. Output 15 v. 60 amps. Tapped at 14-13.5-13 v. 7½×7×6in. Weight approx. 50 lb. Price 35/-. Carriage and packing, 15/-.
We have a limited number with broken terminal boards that we can offer at 35/- plus carriage etc.

SUPER QUALITY TELEVISION MAGNIFYING LENS. To suit 5in., 6in. or 7in. tubes. Increase picture size considerably, 25/- each.

P.M. MOVING COIL LOUDSPEAKERS
(3 ohm v/c.)
2½in. Personal Type (15 ohm v/c.) 15/-
3½in. J.P. ..... 9/- 6in. Truvox ... 12/6
5in. Rola..... 12/6 8in. Plessey ... 14/6
5in. Speaker in handsome plastic cabinet (cream or walnut), 6×6in., with v./control, 27/6.

MOVING COIL LOUDSPEAKERS. ROLA 6½in. ENERGISED, 1140 ohm field, with pentode O.P. Transformer, 15/- each.

PLESSEY 5in. PERMANENT MAGNET, with extra heavy magnet and pentode O.P. Transformer, 12/6 each.

T.V. WHITE RUBBER MASKS (CORRECT ASPECT). We can supply a specially designed White Rubber Mask for 6in. C.R. tubes at 8/6 each.
9in. White Masks, 9/6. 12in. White Masks, 16/11. Round or flat faced.



GIVE YOUR HOME-BUILT RECEIVER THAT PROFESSIONAL LOOK.
We can supply all the parts to help you.
Bakelite Cabinet (Brown or Ivory) 17/6

Punched Chassis
3 valve plus rectifier T.R.F. } 5/6
or 4 valve plus rectifier, Superhet
Engraved Glass Dials
16-50 and 180-550 metres } 2/6
or 180-550 and 800-2,200 m. } each
or 16-50, 180-550 and 800-2,200 m.
All with station names, new wavebands.

T.R.F. COILS.
180-550, 800-2,200 metres, pair 6/6

SUPERHET COILS
16-50, 180-550, 800-2,000 metres, set 10/6

CORD DRIVE ACCESSORIES FOR ABOVE.
Drum (2½in. diam.) 1/6
Driving Head 1/6
Double Pointer ..... 4d.
Spring ..... 3d.
Nylon Cord (yard) ..... 6d.
Dial Back Plate 2/6

CIRCUIT DIAGRAMS
For T.R.F. or Superhet Receivers, each ... 1/6

PORTABLE L.S. CABINETS.
To take 10in. Speaker. Internal measurements 16½in. x 13½in. x 5½in. There is also a small compartment 16½in. x 5½in. x 2½in. at the top for Cables, etc.
This is an ideal Cabinet in which to construct a portable amplifier, and a chassis specially made to fit the Cabinet can be supplied if required.

CABINET 10/6
Carriage and Packing 2/6

CHASSIS to fit size 16½in. x 5½in. x 2in. deep. 6/6

THE CHANCERY LONG PLAYING ATTACHMENT G.33 *(Patents Pending)*
FOR LONG PLAYING RECORDS ON YOUR EXISTING RADIOGRAM OR RECORD PLAYER.
The Chancery G.33 is a precision engineered device of advanced design, its compactness and its simplicity of operation and fixing enabling users of normal radiogramophone and record playing equipment to enjoy the outstanding reproduction and other known advantages of long playing records.
Reduction of speed from the standard 78 r.p.m. is obtained by an epicyclic transmission and reduction mechanism, ensuring a constant speed of 33⅓ r.p.m. without rumble noise, provided that the gramophone motor with which it is employed is satisfactory. It embodies a specially designed high fidelity Decca Crystal Pick-up with a light weight balanced arm fitted with a sapphire stylus having a pressure weight of approximately 10 grammes on the record. Wear on records is thus reduced to negligible proportions, and surface scratch, so much of a nuisance in the past, is now almost completely eliminated. (It is absolutely imperative that a microgroove pick-up be used with long playing records.)
THE CHANCERY LONG PLAYING RECORD ATTACHMENT G.33 has the outward appearance of a standard gramophone turntable of the usual 10in. diameter but with a depth of 3in. It has merely to be placed on the existing turntable and no special fixing is required. Price complete including Decca High Fidelity Crystal Pick-up £6/1/-. Price less Pick-up £3.12.6.

3-GANG CONDENSERS. Modern bar type, .0005 mfd. ¼in. diameter spindle, ceramic insulation, 5/- each.

EMI AUTOCHANGER.
Plays eight 10in. or 12in. Records (not mixed). Rim drive, mounted on Unit Plate 14in. square for 200-250 volt A.C. mains. Fitted with (Marconi No. 14 P.V.) high fidelity lightweight pick-up with matching Transformer £11.10/- including tax.

PLESSEY RIM-DRIVE GRAMOPHONE MOTOR, mounted on Unit Plate, with auto-stop, 10in. turntable, for 200-250 volt A.C. mains. Fitted with high fidelity magnetic Decca pick-up with sapphire stylus. £7.15/-, including Tax.

WRITE FOR DETAILS OF 3-SPEED GRAMOPHONE MOTORS AND RECORD CHANGERS.

BLOCK CONDENSERS. Jelly filled. 1 mfd., 1,500 v. working, 2/- each, 18/- per dozen ; 1 mfd., 600 v. working, 1/3 each, 12/- per dozen ; 2 mfd., 800 v. working, 1/9 each, 17/- per dozen.

CARBON RESISTORS
Best quality, ½ watt, 330Ω, 680Ω, 6.8K., 680K. ½ watt, 160Ω, 190Ω, 640Ω, 6.8K.
1 watt, 220Ω, 220Ω, 390Ω, 450Ω, 1K., 3K., 3.3K., 6.2K., 15K., 24K., 40K., 44K., 68K., 75K., 1.8 meg.
2 watt, 220Ω, 270Ω, 390Ω, 750Ω, 1K. 3K., 4.3K., 22K., 47K., 3 watt, 470Ω, 91K.
All at 4d. each or 3/6 per dozen of one type or 36/- per gross of one type.

OAK 4-PIN, 12 VOLT, NON-SYNC. VIBRATORS. 5/- each. 42/- per dozen. Transformers for same 8/6 each, £4 doz.

CALLERS TO:
152-153, FLEET STREET, E.C.4 and at 207, EDGWARE ROAD, W.2
Phone: CENtral 2833 *Phone: AMBassador 4033*
Terms of Business: Cash with Order or C.O.D. over £1 *207, Edgware Road is open until 6 p.m. on Saturdays*

PREMIER RADIO COMPANY

MORRIS & CO. (RADIO) LTD

LONG RANGE TELEVISOR KITS FOR—

LONDON & BIRMINGHAM MODELS STILL AVAILABLE

USING VCR97 —— £21 - 0 - 6 —— INCLUDING TUBE

(CARRIAGE & PACKING 15/-)

As is usual in Premier Kits every single item down to the last Bolt and Nut is supplied. All chassis are punched and layout diagrams and theoretical circuits are included.

FIVE EASY-TO-ASSEMBLE KITS ARE SUPPLIED :—

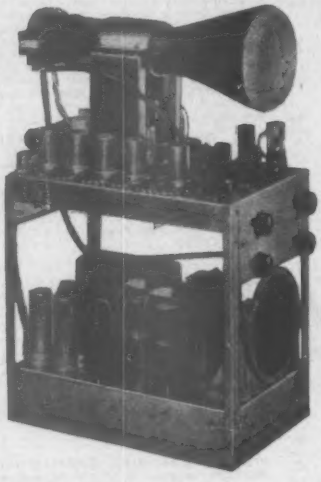

"ELECTROSTATIC" CONSTRUCTION BOOK 2/6

VISION RECEIVER with valves, carriage 2/6.....	£4 6 6
SOUND RECEIVER with valves, carriage 2/6.....	£3 4 2
TIME BASE with valves, carriage 2/6.....	£2 17 6
POWER SUPPLY UNIT with valves, carriage 5/-.....	£7 4 0
TUBE ASSEMBLY, carriage and packing 2/6.....	£3 8 4

This unit includes the VCR97 Tube, Tube Fittings and Socket and a 6in. P.M. Moving Coil Speaker with closed field for Television. The instruction book costs 2/6, but is credited if a Kit for the complete Televisor is purchased.

Any of these Kits may be purchased separately; in fact, any single part can be supplied. A complete priced list of all parts will be found in the instruction book.

20 Valves are used, the coils are all wound and every part is tested. All you need to build a complete Television Receiver is a screwdriver, a pair of pliers, a soldering iron and the ability to read a theoretical diagram.

The following sensitivity figures prove that the Premier Televisor Kits are capable of reception at greater distances than any other standard commercial kit or receiver whether T.R.F. or Superhet.

VISION RECEIVER

Sensitivity	25μV. for 15V. peak to peak measured at the Anode of the Video Valve.
Sound Rejection	Better than 40 db.
Adjacent Sound Rejection ...	Midland Model. Better than 50 db.

SOUND RECEIVER

Sensitivity	20μV. Vision Rejection, better than 50 db.

Due to the large number of orders in hand, coupled with supply difficulties, we are reluctantly compelled to temporarily close our Postal Service.

No Post Orders can be accepted after June 14th until further notice. Our Technical advice and Service departments remain in operation. Resumption of Postal Service will be announced in these columns.

Owing to rapidly diminishing stocks both Televisor Kits will only be available until June 14th.

CALLERS TO

207, EDGWARE RD., W.2 Phone : AMBassador 4033 (Open till 6 p.m. Saturdays)

AND 152-153, FLEET STREET, E.C.4 Phone : CENtral 2833

PREMIER RADIO COMPANY

MORRIS & CO. (RADIO) LTD.

HOLME MOSS & KIRK-O-SHOTTS—NOW AVAILABLE

USING 9" OR 12" MAGNETIC C.R. TUBES

£23·10·0 *including all parts, valves and loud-speaker, but excluding C.R. TUBE*

(Carriage and Packing 15/-)

CIRCUIT DETAILS

The Vision Receiver consists of 4 R.F. stages (EF54's) which are followed by a Diode Detector and Noise Limiter (6H6) which is directly coupled to the Video valve (EF54).
Complete Kit with valves, **£4/9/6**
Carriage and packing 2/6.

The Sound Receiver comprises 3 R.F. stages (6SH7's) followed by a Double Diode Triode (6Q7) which acts as Detector and L.F. Amplifier. A Noise Limiter (EA50) is also incorporated. The output valve (6V6) drives a 10in. P.M. Moving Coil Speaker with closed field magnet, which is included in the Time Base Kit.
Complete Kit with valves, **£3/11/10**
Carriage and packing 2/6.

The Time Bases employ blocking oscillators on both Line (6SH7 and 807), and Frame (VR137) and 6V6. E.H.T. (Non-lethal) is taken from the Line Output Transformer through a voltage doubler employing two valves (VU111). The Sync separators are 6H6 and 6V6.
Permanent Magnet Focusing.
Complete Kit with valves, **£9/12/2**
Carriage and packing 5/-.

The Power Supply is from a double-wound mains transformer completely isolating the receiver from the mains. The H.T. Rectifier is a 5U4G.
Complete Kit with valves, **£5/16/6**
Carriage and packing 5/-.

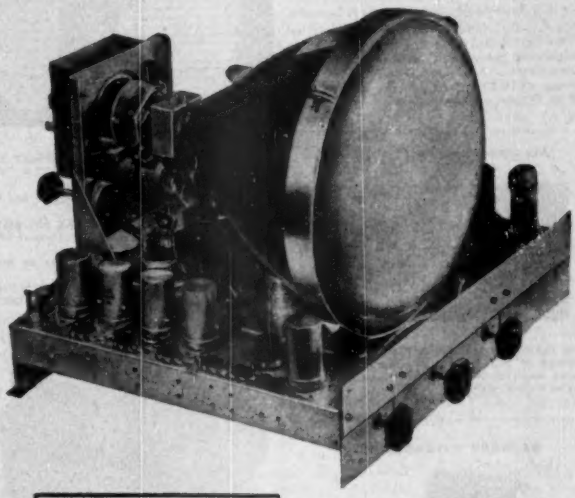

"MAGNETIC" CONSTRUCTION BOOK 3/-

WELL MADE WALNUT FINISH
PEDESTAL CABINETS

FOR	6in. TUBE KIT	£6. 10. 0
,,	9in. ,, ,,	£6. 15. 0
,,	12in. ,, ,,	£9. 9. 0

CARRIAGE & PACKING 7/6

EACH KIT OR INDIVIDUAL PART AVAILABLE SEPARATELY

We have considerable stocks of all popular makes of 9" & 12" Magnetic Cathode Ray Tubes which were purchased at pre Purchase Tax increased Prices. While stocks last, these are available to purchasers of Magnetic T.V. Kits.

ALL POST ORDERS (UNTIL JUNE 14th) TO
740 HIGH RD., TOTTENHAM, N.17. *TOTTENHAM 5371*
TERMS OF BUSINESS, CASH WITH ORDER, OR C.O.D. OVER £1.
PLEASE NOTE THAT OUR CATALOGUE IS OUT OF PRINT

PREMIER RADIO COMPANY

MORRIS & CO. (RADIO) LTD.

BUILD A PROFESSIONAL LOOKING RADIO AT LESS THAN HALF TODAY'S PRICE

Two modern receiver kits are available. A three-valve, plus rectifier, T.R.F., and a four-valve plus rectifier superhet. Both are housed in attractive Bakelite Cases, size 12in. x 5in. x 6in.
Each Kit is complete in every detail, nothing has to be made or improvised. Easy to follow, point-to-point diagrams are supplied, making construction very simple. They are for use on 200-250 volt mains, and both A.C. and Universal Models can be supplied.
The Dials are illuminated, and the receivers present an attractive appearance. The increased prices are regretted but unavoidable.

T R F Valve line-up :—

EF22 H.F. Pentode.

VR116 Detector.

CV1510 Beam Power Output in the A.C. model.

The A.C./D.C. Output Valve is 12A6. Both use Metal Rectifiers.

Waveband coverage is for the Medium and Long Bands.

Price £5/19/6. (Carriage and packing 2/6.) With Walnut or Ivory Cabinet.



SUPERHET Valve line-up :—

6K8, 6K7, 6Q7 and CV1510 Beam Power Output in the A.C. Model.

The A.C./D.C. Output Valve is 12A6. Both use Metal Rectifiers.

Waveband coverage is 16-50, 190-540 and 1,000-2,000 m.

Price £7/19/6. (Carriage and packing 2/6.) With Walnut or Ivory Cabinet.

WILLIAMSON AMPLIFIER KIT.

We can supply the Kit of Parts for the latest version of this famous amplifier complete in every detail for **£10/10/-**, with valves, output and mains transformers.

BATTERY CHARGER KITS.

All incorporate Metal Rectifiers. Transformers are for use on 200-250 v. 50 cycle Mains.

To charge 6 v. Accumulator at 1 amp. with resistance supplied to charge 2 v., **22/6.**

To charge 12 v. accumulator at 1 amp., **27/6.**

To charge 12 v. accumulator at 4 amps. with variable resistance and meter as illustrated, **75/-.**

NEW BABY ALARM KIT.

A complete Kit of Parts in plastic cabinet to construct a device to enable baby's cries or even breathing to be heard in any selected room in the house. Consists of a 2-valve amplifier (mains operated) with midget telephones which are used as microphone and loudspeaker. May be left permanently connected. Complete with valves, circuit and instructions for 200-250 v. A.C. mains, **55/-.**

NEW A.C. ALL-WAVE SUPERHET KIT.

7 valves (plus rectifiers) for 200-250 v., 40-60 cycles A.C. mains.
4 wavebands, 13.6-52, 51-190, 190-540 and 900-2,100 metres.
Pick-up input. Uses 6K7, 6K8, 6K7, 6B8, 6J5 and two 6V6 in push-pull, giving an output of 10 watts.
Specially designed O.P. transformer to match 6V6's to 3 and 15 ohm speakers.
Negative feedback is applied over 3 stages giving a high fidelity output. Tone control is incorporated, **£16/15/9.**



Also available for A.C./D.C. mains. Specification as above except that valve line-up is 6K7, 6K8, 6K7, 6Q7, 6J7, two KT33C. In Kit form at **£15/17/9.**

H.T. ELIMINATOR AND TRICKLE CHARGER KIT.

All parts to construct an eliminator to give an output of 120 volts at 20 m/a. and 2 volts to charge an accumulator. Uses metal rectifier, **35/-.**

MAINS NOISE ELIMINATOR KIT.

Two specially designed chokes with three smoothing condensers with circuit diagram. Cuts out all mains noise. Can be assembled inside existing receiver, **6/-** complete.

GRAMOPHONE AMPLIFIER KIT.

Consists of complete Kit of Parts for a 2½ watt Mains-operated 2-stage Amplifier for use with any type of pick-up. Volume and tone controls are incorporated. Output impedance is 3 ohms.
Cat. No. AMP147. Price complete, **59/6.** For 200-250 v. mains with valves and diagrams.

TELEPHONE KITS.

Build yourself a 2-station telephone with two complete units as illustrated. Uses balanced armature units. No batteries needed. **15/-** Set of two Units. With diagrams.

METER KIT. A 503 MICROAMP M/C METER, with separate High Stability, High Accuracy, Resistors to measure, 15, 60, 150 and 600 volts D.C. Scale length 1¾in., diameter 2½in. **13/-** the complete kit.

ALL POST ORDERS (UNTIL JUNE 14th) TO

740, HIGH ROAD, TOTTENHAM, N.17. Tottenham 5371

Terms of Business: Cash with Order, or C.O.D. over £1

PREMIER RADIO COMPANY

MORRIS & CO. (RADIO) LTD.

STOCKS ARE RAPIDLY DIMINISHING

BUY NOW, BEFORE IT IS TOO LATE

CATHODE RAY TUBES

C.V. No.	Civil'n No.	Dia. in inches	Focus	Defn.	EHT	O.K. for T.V.	Price	Rail, Pkg. & Insur.
600	5CP1	5	E.S.	E.S.	2 kV.	Yes	25/-	2/6
953	—	5¼	Gas	E.S.	1500 v.	No	17/6	2/6
1596	—	4½	E.S.	E.S.	1200 v.	Yes	25/-	2/6
—	VCR528	11.5	E.S.	Mag	6 kV.	No	60/-	12/6
1384	—	11.5	E.S.	E.S.	4 kV.	Expmtl.	40/-	10/-
1516	VCR516	9	Mag	Mag	5 kV.	No	40/-	10/-
2880	EM14/1	3	E.S.	E.S.	800 v.	Yes	17/6	1/6
3776	—	5.25	E.S.	E.S. Mag	4 kV.	Expmtl.	20/-	2/6

Thermal Delay Switches: **CV190, 6/6.**

Acorn Valves: Type **956, 2/6** each **20/-** per dozen. Type **958A, 3/-** each, **24/-** per dozen. Types **9004, 9005, 3/6** each.

V/M Pentodes **CV 1124** (MSPEN), 4 v. 7-pin base, **5/-** each, **36/-** per dozen.

5CP7 C/R Tubes **30/-**, plus 5/- carriage, packing and insurance.

Mercury Vapour Rectifiers. Type **CV1283** (G.U.I.) **7/6.**

EHT Rectifiers. Type **2X2/879, 2/6** each, **20/-** per dozen.

VCR 517C C/R Tubes 6½in. Diam.: Green/Blue Screen. Excellent for T.V., **20/-**. Base **2/6**, carriage, packing and insurance 5/-.

In addition we offer the following tubes at the ridiculous price of **5/-** each (preferably to callers only as packing, carriage and insurance amounts to 7/6). Types available. **ACR1, ACR2, ACR2X, ACR8, ACR1381, ACR19.**

VCR 97 C/R Tubes. Have slight cut-off making them unsuitable for T.V. use, otherwise perfect, **10/-** each. Base 2/6, plus 5/- carriage, packing and insurance.

Transmitting Triode, **VT30, 7/6** each. Postage and packing, **3/6.**

UHF Oscillators, Type **RL18, 5/-** ea., **40/-** per dozen. **CV3505, HY114B, 6/6** each.

Thyratrons, Type **CV 1141, 6/6** each, **50/-** per dozen. Type **CV 22, 20/-** each. Klystrons **CV43, 30/-** each.

1-Kilowatt Pentodes. Type **861, 20/-** (callers only).

UHF Triodes. Type **7193, 1/6** each, **12/-** per dozen.

Bayonet Base (Side Contact) Output Valves, Type **EL50**, 6.3 v., **5/-** each.

Output Triodes Type **DET 5.** An excellent replacement for PX25, **10/-** each, **75/-** per dozen.

Type **E114B, 1/6** each, **12/-** per dozen. Type **CV52, 4/6** each.

Miniature Valves **CV3830** (XH 1.5), **2/6** each, **20/-** per dozen.

Transmitting and Special Purpose Valves Special Offer. Types **8012, 830B, 878, 705A, 843, 1625, 1616, 4C27, 703A, EL266.** Any of the above **5/-** each.

25 watt Pentodes. Type **PT 25 H.** 4 v. 400 v., **3/-** ea., **24/-** per dozen.

Bayonet Base (Side Contact) Low Noise H.F. Pentode. **CV1123** (EF8), (VR123), 6.3 v., **5/-** each, **36/-** per dozen.

T.R. Box. Type **CV90, 20/-** ea. T.R. Box. Type **CV115, 5/-** each. Magnetron, **CV186, 10/-** each.

ARP3 Valves. 13 v. .2A H.F. Pentodes, **3/-** each, **24/-** per dozen.

SPECIAL OFFER —NOW AVAILABLE

C.R. Tubes, Type ACR13 (CV1385). A perfect replacement without alteration for the VCR97. Guaranteed free from "cut-off," price **35/-**. Send 3d. for latest valve list of hundreds of types at lowest prices.

TRANSMITTING VALVES

813	£3	U19	6/6	715A	£3
1B24	£3	327A	£1	HF300	£3
3B24	£1	357A	£3	CV19	30/-
707B	£3	282A	£2	803	15/-
		2E22	6/6		

ALL POST ORDERS (UNTIL JUNE 14th) TO

740 HIGH RD., TOTTENHAM, N.17. *TOTTENHAM 5371*

CALLERS TO:

152-153, FLEET STREET, E.C.4. *Phone: CENtral 2833*—**and at—207, EDGWARE RD., W.2.** *Phone: AMBassador 4033*

207, Edgware Road is open until 6 p.m. on Saturdays.

ELPREQ PAGES

BREAK-DOWN UNIT

At present day prices the spares in this unit would cost at least £5. Here is a list of the main contents :

3 two-metre coils ;
3 tuning condensers, split-stator type ;
4 two-watt carbon resistors, useful values ;
1 tapped 20 watt resistor, vitreous covered ;
6 paper condensers, .05 mf. 1,000 v. working ;
3 paper condensers, .1 mf. 1,000 v. working ;
2 H.F. chokes ;
4 paper condensers, .1 mf. 450 v. working ;
2 paper condensers, .15 mf. ;
5 bakelite moulded mica condensers .001 ;
1 paper condenser, .01 mf. 3,000 v. working ;
24 rubber grommets, assorted sizes ;
6 resistors 1 watt, all useful values ;
6 resistors ½ watt, all useful values ;
40 resistors ½ watt, all useful values ;
40 silver mica condensers, assorted values, including : 10, 15, 20, 40, 50, 100, 150, 300, and 500 pf. types ;
4 English octal valve holders ;
2 English 5-pin valve holders ;
1 E.F.50 type valve holder ;
3 diode valve holders ;
1 louvred casing, size 12 × 7 × 4in. ;
1 heavy meta. chassis, size 12 × 7 × 2in. ;
8 condenser clips, assorted sizes.

Also an assortment of nuts, bolts P.K., self-threading screws, tag boards, chassis mounting tag connectors, screened grid caps, plain grid caps, levers rollers, connecting rods, output sockets, etc., etc. ALL THIS COLLECTION OF PARTS FOR **6/6** only, plus 1/9 postage and packing.

R.1155 RECEIVERS

Brand new, aerial tested, perfect in transit case, **£9/15/-**. Power pack and data available on request, carriage 10/-.



EX-ROYAL NAVY SOUND POWERED TELEPHONE

These require no batteries, and will go for long periods without attention. Complete with generator and sounder which gives a high pitched note, easily heard above any other noise. Also fitted with an indicator amp which in quiet situations can be used instead of the sounder, or where several 'phones are used together, will indicate which one is being called. Size 7¾in. × 9in. × 7¼in., wall mounting, designed for ships' use, but equally suitable for home, office, warehouse, factory, garage, etc. Price **37/6** each, plus 3/6 carriage.

10 kVA ALTERNATOR SETS

Complete electrically with all switch gear, voltage regulators, frequency meters, etc., etc. These have two circuits, one giving 10 kVA. at 230 v. 50 cycles, the other giving 1½ kVA. 230 v. 500 cycles. Complete with 'Vee' belt pulley. Can be driven by lorry engine, oil engine, etc., the speed of which is not important. Unused but somewhat storage soiled. Price **£65.** carriage extra.

SPECIAL JACK PLUG

American 4 contact which we can supply at **1/3** each. We have dozens of other types of plugs and sockets. Send us your special enquiries.

— WIN £5 —

You can have a lot of fun and at the same time stand a good chance of winning either the first prize of £5 or one of the £1 consolation prizes. All you have to do is to suggest some new use for our Impulse Relay. The action of the Impulse Relay is as follows : Current to the solenoid causes the ratchet wheel to rotate 1 notch per impulse. A built-in automatic switch converts the A.C. supply into impulses and keeps the relay going until it is switched off by either or both of two independent switches, which form part of the complete relay. We can supply these Impulse Relays at **3/9** each, and we can also supply a booklet of circuits for **1/9.**

THIS MONTH'S SNIP

E.M.I. Cathode Ray Tube, type No. 4/1, electrostatic 3in.—complete with tube holder—unused and guaranteed perfect. Price **9/6,** postage, packing and insurance 2/6 extra.

TWO VOLT ACCUMULATORS

Made for the forces by one of the most famous firms in the World. 15 amp. hour size approx. 6in. × 1¾in. square in ebonite case, precharged, only need filling with acid, **5/9** each, plus 9d. post and insurance. Six or more post free.

SERVICE DATA

100 service sheets, covering British receivers which have been sold in big quantities, and which every service engineer is ultimately bound to meet. The following makers are included : Aerodyne, Alba, Bush, Cossor, Ekco, Ever-Ready, Ferguson, Ferranti, G.E.C., H.M.V., Kolster Brandes, Lissen, McMichael, Marconi, Mullard, Murphy, Philco, Phillips, Pye, Ultra. Undoubtedly a mine of information invaluable to all who earn their living from radio servicing. Price **£1** for the complete folder.

Our folder No. 2 consists of 100 data sheets covering most of the popular American T.R.F. and superhet receivers "all dry" etc., which have been imported into this Country. Names include Sparton, Emmerson, Edmiral, Crossley, R.C.A. Victor, etc. Each sheet gives circuit diagrams and component values, alignment procedure etc., etc. Price for the folder of 100 sheets is **£1.** Post free.

RECEIVING VALVES

We carry a full range of all types ancient and modern, send for special list, or if in a hurry ask us to send your valves C.O.D. We also stock Tungar Rectifiers, Voltage Regulators, Photo Cells, Magnetrons, Clystrons, Thyratrons, etc., etc. Send us your enquiries.



.0005 2-GANG CONDENSER

Ceramic insulation with "no back lash" gear drive. Drive easily removed if required, when condenser becomes a standard type with long spindle. Price **9/6** each.

METAL DIVIDERS

Really well made for Government workshops. Ideal for marking out on metal chassis. Price **3/6.**

HEADPHONES

The famous DLR2, unused and in perfect order. Price **7/6** per pair.

MORSE KEYS

Made for the army, new and in perfect condition. Price **1/3** each.

P.P. INPUT TRANSFORMER

Small size—push-pull, fully shrouded, **5/6** each. Push-pull output transformers to match, **6/6** each.

INDUCTANCE TYPE ATTENUATORS

High fidelity enthusiasts will confirm that an ordinary wire wound volume control in series with a speech coil introduces distortion. We have some inductance type attenuators wound in a very compact manner with heavy stud contacts giving reactance tappings as follows:- off 42, 34, 23, 13, 7.9, 4.3, 1.7 0 ohms. You will see that these tappings have been chosen to enable the control to be calibrated in decibels. Price **4/6** each.

CLEAR PERSPEX PANELS

Size 5¼in. long, 3¼in. wide, and a little over a ¼in. thick. Price **1/6** per panel.

TYPE 6 INDICATOR

We have a few more of these left, brand new, containing, VCR97, 4—EF50, etc., etc. Price **£3/19/6** transit case, carriage, etc., **7/6**.

MORSE KEYS

Heavy duty type in bakelite housing, **7/6** each.

25 WATT AMPLIFIER

By 'Marconi' on 6ft. rack with power pack and pre-amplifier, but less valves. Price **£12/10/-**.

HIGH VOLTAGE CONDENSER

.01 5,000 v., in aluminium can, **2/6** each.

B7G PLUG

Fits any B7G holder, ideal in small chassis, etc. Price **1/4** each.

AIR SPACED TRIMMERS

We have a good assortment of air spaced trimmers. The one illustrated is a 50 p.f. with long (2½in.) spindle. Price **2/3**. Another interesting one is a 2-gang 75 p.f. with short spindle. Price **4/9**.

LIQUIDATOR'S STOCK



Polished walnut radio cabinet size 20×12×7½in., complete with L., M. and S. dial, size 7×6½in. and backplate with magic eye cutout, also with drilled chassis and hardboard back. You will find it quite a simple matter to complete this into a very handsome receiver of the £15 class. Limited quantity price 30/6 plus 2/6 carriage for the 5 items.

ELECTROLYTIC CONDENSERS

1 mfd. 500 v.	1/6	8 mfd. × 16 mfd. 450 v. (midget)	4/6
2 mfd. 450 v.	1/6	8 mfd. × 16 mfd. 500 v.	6/-
4 mfd. 350 v.	1/8	16 mfd. × 16 mfd. 500 v.	7/-
4 mfd. 450 v.	1/10	25 mfd. × 25 mfd. 200 v.	4/9
8 mfd. 350 v.	2/-	8 mfd. × 8 mfd. × 8 mfd. 450 v.	3/9
8 mfd. 450 v.	2/6	32 mfd. × 32 mfd. 450 v.	6/D
8 mfd. 500 v.	3/3	150 mfd. × 150 mfd. 150 v.	6/9
8 mfd. 500 v., centre screw fixing	1/6	50 mfd. × 12 v.	-/9
8 mfd. 600 v., centre screw fixing	1/9	1p mfd. × 25 v.	1/-
16 mfd. 350 v.	2/9	25 mfd. × 25 v.	1/6
16 mfd. 500 v.	4/9	12 mfd. × 50 v.	1/4
32 mfd. 350 v.	2/9	250 mfd. × 12 v.	2/3
8 mfd. × 8 mfd. 450 v.	3/9	500 mfd. × 12 v.	1/3
8 mfd. × 16 mfd. 450 v. (large)	1/9	25 mfd. × 50 v.	2/-
8 mfd. × 16 mfd. 350 v.	2/9	50 mfd. × 50 v.	2/3



VOLUME CONTROLS

We carry a full range of standard size volume controls from 2 K. to 2 meg. Prices are: Less switch, **3/-**, Single pole switch, **4/-**, Double pole switch, **5/-**. We can also supply midget type controls as illustrated: Less switch, **4/-**, Single pole switch, **5/9**, Double pole switch, **6/6**. Each of these midget controls has a serial number and carries a 12-month guarantee by the makers, they are made on the new moulded track principle and really do perform well.



6 v. VIBRATOR PACK

Small size ⅞in. × 4in. × 2½in., totally enclosed, complete with synchronous vibrator and smoothing. Limited quantity, **27/6** each.

LESS THAN HALF PRICE

15 amp. shuttered switch plug, bakelite moulded surface, mounting type, made by very famous maker, made to B.S.S. **8/6** each.



2-GANG .00035 TUNING CONDENSER

Complete with perspex dust cover and built-in trimmers. Super job for tuning personnel receivers. **8/6** each.



ALUMINIUM TUBE

½in.—ideal for all lighting work and for making T.V. aerials, etc. Price **1/-** per foot.

MAINS TRANSFORMER

Half shrouded drop through, standard primary, 300-0-300 v. at 80 mA., 6.3 v. 4 amps. tapped at 4 v., and 4 v. 3 amps., **15/6**.

METAL RECTIFIER

300 v. 100 mA., selenium 4½in long, **5/6**.

R.F. UNIT TYPE 27

Cases soiled but internally perfect, complete with valves, **32/6**.

HIGH VOLTAGE CONDENSERS

We have many types in stock, one special one at a low price is .01 mfd. 5 kV. in 5in. Ali-can, **2/6**.

80 OHM CO-AXIAL CABLE

Thin type by one of our leading manufacturers, **11d.** per yard.

COMPLETE CHASSIS FOR PERSONNEL SET

Medium wave, required only valves—three type 1T4 and one type 3V4, will fit into cabinet size 7in. × 4½in. × 3½in., leaving ample room for batteries. Price **40/6**, all wire ready.

FILAMENT TRANSFORMERS

6.3 v. 1½ amp., same size as standard output transformer, **6/6**.

RINGING SPEECH TRANSFORMER



Totally enclosed in round black case, 2in. high, diameter approximately 3½in. Circuit as per diagram, **6/6** each.

Orders under £2 add 1/6, under £1 add 1/-. Postable items can be sent C.O.D., additional charge approx. 1/-. Good stock of all items at time of going to press. List 6d. **Telephone: Ruislip 5780.**

ELECTRONIC PRECISION EQUIPMENT (2) ELECTRON HOUSE, Windmill Hill, RUISLIP MANOR, MIDDX.

DECCA LONG PLAYING INSTRUMENTS

The Decca long playing instruments described below have been designed for use with almost all radio receivers and radiograms. Nothing could be simpler than their installation: just plug in, and the whole new world of long playing plus full frequency range recording is yours to explore and enjoy—in the comfort of your own home.

Model 33A.
Single speed 33⅓ r.p.m. player. Crystal pick-up, pressed steel base **£9.9.0** inc. P.T.

Model 33B.
Single speed 33⅓ r.p.m. player with change-over switch for use with existing 78 r.p.m. player. Crystal pick-up, leather-cloth-covered case. **£12.1.6** inc. P.T.

Model 37A.
Similar in appearance to Model 33A, but fitted with dual speed (33⅓ and 78 r.p.m.) motor unit and turnover crystal pick-up for both 33⅓ and 78 r.p.m. records. **£12.1.6** inc. P.T.

AMERICAN TYPE
LONG BEAM FOCUSING
TORCH

700 ft. RANGE

Fully Guaranteed

Nickel-plated. Complete with U2 batteries and bulbs. Ideal for all-year-round use in home, workshop, garden. Eminently suitable for motorist or cyclist.

Pull-out loop; spare bulb in container in base.

Type A
15/11
Post free

No more of these torches can be imported at less than double the above price. Buy now while stocks last.

Effective next month—price increase to 18/6

Interested in HOME "BROADCASTING" or RECORD REPRODUCTION?



if so, this

M-O-S "A1" AMPLIFIER KIT

is a "MUST"

Even if you know nothing of radio **YOU CAN MAKE** this wonderful amplifier. It can be used with a microphone for HOME BROADCASTING, or you can play your records through it. The kit is complete right down to nuts and bolts and solder. There is DEFINITELY NOTHING ELSE TO BUY. The instruction manual contains easy step-by-step instructions. YOU CANNOT GO WRONG. Many diagrams show exactly what to do.
For A.C. Mains only. 200-250 v.

Complete Kit with Instruction Manual **92/6**
Instruction Manual Only 3/6, post free.
Microphone with matching transformer. Desk type, Bakelite moulding. 7/6

AC/DC AMPLIFIER Type A2



This amplifier is an A.C./D.C. version of the A.C. type A1. The A2 amplifier gives those on D.C. the opportunity to construct, at very reasonable cost, an amplifier whose reproduction can be classed as excellent. (For those on A.C., however, the A1 is to be preferred due to its higher safety factor.)
The amplifier has an output of 2-3 watts—more than adequate for normal rooms. It is designed mainly for use with crystal pick-ups, but can be used with magnetic types if desired.

A2 Amplifier Kit with Instruction Manual **85/-**
Instruction Manual (contains full details) **3/-**

Send for the instruction manual to-day—and see how easy it is to build these amplifiers.

"BURGOYNE" SOLDER GUN

79/6 POST FREE

This Solder Gun, ruggedly built for long life and trouble-free operation, will save you those embarrassing electricity bills, because it is only "on" while you are actually soldering a joint. NO risk of picking up the "wrong end." NO solder dropped about. NO more scorched tables. ALL the heat at the joint. NO heat wasted. NO risk of the iron becoming live. Scientifically balanced for ease of handling.
SPECIAL: NOW AVAILABLE AGAIN! Spare Bits for Burgoyne Solder Gun. 10 for 7/6

R.3515

21-valve radar units with six stage 14 MC I.F. Strip. There is sufficient space on the chassis to construct a complete T.V. receiver—excluding E.H.T. valves: one EA50, ten SP61, five EF36, three EBC33, one EF39, one EB34
Brand New in Transit Cases **£3.10.0**
Carr. Paid.

OVERSEAS BUYERS
please note

We are among the largest exporters of radio valves, components, meters, etc. Let us have your inquiries. An efficient service will unfailingly supply your requirements.

Special for
RADAR ENGINEERS
in stock now

FLUX DENSITY METERS,
H2S UNITS,
VOLTAGE REGULATORS,
ALTERNATORS, etc., etc.

MARINE RADAR BUYERS
We have available a quantity of SQ equipments, brand new, in original packing, and absolutely complete.

SPECIAL!
The following are still available at PRE-BUDGET PRICES. Buy now while stocks last.

FLEXIBLE TABLE LAMPS 45/- (post., pkg., 1/6)
FERGUSON 239A TABLE RECEIVERS £16 16s. (carr., pkg., 10/-).
IVALEX DE LUXE XTAL RECEIVERS 17/6 (post., pkg., 1/-).
IVALEX STANDARD XTAL RECEIVERS 12/11 (post., pkg., 1/-).
MARCONI 724D AB PORTABLES (AC/DC & battery) (carr., pkg., 5/-). £18 15s.

B.S.R. TAPE & WIRE RECORDER MOTORS

This small induction motor is specially designed for magnetic tape and wire recorders. Absolutely silent in operation and virtually free from vibration. Minimum stray magnetic field for A.C. mains 100-250 v. 50 cycles. Post free. Type FP10 **38/-**

The LIDO SUN LAMP

- ★ **Real high pressure quartz mercury generator (150 watts).**
- ★ **Radiant heat element**
- ★ **Compact. Size when closed 12in. × 7½in. × 3in.**
  Weight 3½lb. Suitcase type container.
- ★ **Ready for use on A.C. or D.C. mains.**
- ★ **12 months' guarantee.**

A few left at the pre-budget price of

£14/14 cash (or on H.P. terms)

For RELIABILITY plus EFFICIENCY
THE
"BURGOYNE" AERIAL CONNECTOR

This is the ONE and ONLY unit available which enables a really efficient and reliable weatherproof connection to be made between a dipole and its feeder. Why continue to worry about your dipole? Come gale or hail, rain in drops or by the bucket, this connector will never let you down. Brand new in original cartons. Postage 9d. **18/6**

M·O·S

MAIL ORDER SUPPLY CO., THE RADIO CENTRE, 33 Tottenham Court Road, London, W.1. Museum 6667

The Latest W.B. "Stentorian" P.M. Speakers. 2½in. 15/6; 3½in., 16/6; 5in. 17/6; 6in. 21/-; 7in. 21/-; 8in. 24/-; 9in. 29/6; 10in. 37/6.

Potentiometers. New Centrals: 2K, 5K, 10K, 25K, 50K, 100K, ½, ¾, 1 and 2 megs., less switch, 3/9, with switch, 6/-. Midget with switch, ½, 1 and 1 megs, 6/-. Surplus Midget, 1in. dia. values between 6 ohm. and 2 meg., 2/6 each.

Surplus Potentiometers. All standard size with extended spindles: 5K, 10K, 15K, 20K, 25K, 50K, 100K, 250K, 500K, 750K, 1 meg., 2/- each.

Coils. Denco Maxi "Q" High "Q" with miniature size 1½in wound on Polystyrene Formers with adjustable Iron Dust Cores. Aerial H.F., or Oscillator for 465 k/c. or 1.6 M/c. Ranges covers all wavebands from 8.5 to 2,000 metres. Wiring diagram. Prices: Chassis Mounting 3/9 (with React. 4/9). Octal fitting pin base, 4/- (with React. 5/-). Denco T.R.F. Matched pair Medium and Long Waves, 6/6 pair. Weymouth T.R.F. Matched pair M. and L. Waves, 6/6 pair. Superhet Matched pair S.M. and L. Waves, 9/6 or 11/6 pair. All types Wearite "P" Coils, 3/- each in stock. Weymouth Midget 1½in. x ½in. dia., Iron Core Aerial, H.F. or Osc., 3/6 each.

Electrolytic Condensers. B.R.G. Midget Can Tubular, 8 mfd. 450 v. (1¼in. x ½in. dia.), 3/-; 8-8 mfd. 450 v. (1¾in. x 1in. dia.), 4/6; 16-8 mfd. 450 v. (1¾in. x 1in. dia.), 5/6; 32 mfd. 450 v., 5/6; 16-16 mfd. 450 v. (1¾in. x 1¼in. dia.), 5/6. Dubilier "Definite" Cord Tubular, 4 mfd. 500 v. 2/6; 8 mfd. 500 v., 4/-; 16 mfd. 500 v., 5/6; B.I. Can, standard size, 8 mfd. 500 v., 4/3; 8-8 mfd. 500 v., 5/9; 16 mfd. 500 v., 5/3; 16-16 mfd. 500 v., 6/9; 32 mfd. 500 v., 6/9; All New stock. Dubilier mica .001 mfd. 5,000 v., 2/6.

Denco I.F. Liner for accurately lining-up 465 Kc/s, or 1/6 M/c I.F. channels. Pre-tuned circuits, battery operated and completely self-contained. Price 42/- (incl. P.T.).

Coil Packs. Osmor Midget Coil Pack. Size 3½in. x 2¼in. x 1¼in. covering S. M. and L. Waves. Coils wound on Polystyrene Formers with adjustable Iron Cores, ensures efficient performance. Factory wired and aligned. Price, including full circuits for Superhet 465 Kc/, Unit 2½-. Plus 7/4 P.T. This Osmor Coil Pack is also available for Midget Superhet BATTERY Portable sets, including a matched ready wound Frame Aerial. Price 27/6 (plus 8/10 P.T.). Weymouth Midget 2¼ x 2¼ x 1¾in. covering S.M.L. W/Bands, for 465 k/c., employing Matched Iron Cored Coils on each W/Band, 42/10. Wearite Superhet Type 702 and 706 size 4½in. x 3½in. x 1½in., covering two Short Wave and one Medium W/Band or S-M-L Wavebands. 465 k/c., employs Iron Cored Coils, 37/10. All of the above Coil Packs include Switching, Padding and Trimmer Condensers.

You're SURE to get it at

STERN'S

ESTABLISHED 25 YEARS

Output Transformer—Stern's. Midget 1½in. x ½in. x 1in. ratio 60-1, 3/9 (or ratio 90-1, 3/9). Stern's Multi-ratio (over 15 ratios, some C.T.), 5/6 watts, 6/6. Stern's Heavy Duty Multi-ratio, all C/Tapped, handles 12 watts and suits P.X.4s, 6L6s, etc., 29/6. Rola Multi-ratio, 5/6 watts, 13/-.

L.F. Chokes. Midget 10 henry 250 ohms 40 mA, 3/6; 20 hy. 250 ohm 60 mA, 5/6; 20 hy. 300 ohm, 100 mA, 11/9; 5 hy. 50 ohm 250 mA, 25/6; 20 hy. 250 ohm 120 mA, 26/-; 9 hy. 250 ohm, 150 mA, 8/6.

Metal Chassis. Substantially made of gauge 16 S.W.G. with four sides. 7in. x 4in. x 2½in., 3/3; 9in. x 6in. x 2½in., 4/3; 10in. x 6in. x 2½in., 4/11; 10½in. x 8in. x 2½in., 5/6; 13in. x 9in. x 2½in., 6/3; 14in. x 9in. x 2½in., 6/11; 14in. x 8in. x 3½in., 7/3; 16in. x 8in. x 3½in., 8/6.

I.F. Transformer, 465 k/c. New well-known manufacturer's surplus 1in. x ½in. x 1½in. Iron Core, 9/- each. Denco Iron Core, 465 k/c. or 1.6 m/c., 1½in. x 1½in. x 3½in., 16/6 pair. Wearite Stand Cap, Tuned, 465 k/c., 2/6/-. New Surplus 465 k/c. Iron Core, 4in. x 1½in. sq., 10/- pair.

Meter Rectifiers. Westinghouse 250 micro/amp., 11/6; 1 mA, 10/6; 5 mA, 6/6.

Selenium Rectifiers. H.T./H. wave. 230 v. 50 mA, 5/6; 250 v. 100 mA, 7/6; 280 v. 170 mA, 13/9.

F. Wave Bridge Rectifiers for Battery Charging or Model T. 4 or 6 v., 1½ amp., 6/6; 6 or 12 v. 1½ amp., 11/9; 6 or 12 v. 3 amps., 21/-; 6 or 12 v. 6 amps., 35/-; 12 or 24 v. 3 amps, 23/6.

Variable Resistor to control charging (or model speed) up to 8 amps. rating, 13/6. Suitable METER, 5/9.

Charger Transformers. Suitable for use with preceding Rectifiers. Each has input of 230 volts. Outputs (a) 24 volts tapped 12 v., 9 v. and 4 v. at 2 amps., 22/9; (b) 30 volts tapped 15 v. and 9 v. at 2 amps., 22/9; (c) 15 volts tapped 9 v. at 2 amps., 16/9; (d) 12 volts, 1½ amps. 11/3; (e) 15 volts tapped 9 v. at 6 amps, 21/6; 15 volts tapped 9 v. at 1½ amps, 13/6. 15 volts 1 amp, 7/6.
A Battery Charger Wiring Diagram is included with purchase of Charger Transformer and Rectifier.

NEW SURPLUS!! FOSTER TRANSFORMERS. PRIMARY 230 VOLTS. SECONDARY 12 VOLTS 9 AMPS. 21/-.

Filament Transformer. Inputs 230 volts, outputs 6.3 v. 1½ amp., 8/3; 4 v. 1½ amp., 7/9; Input 200/250 v., output 4 v. (C.T.), 1½ amp., 4 v. 3 amp., 6.3 v. 2 amp., 19/6. Input 230 v. output 6.3 v. (C.T.) 4 amp., 16/6.

Westinghouse Rectifiers. (a) H.T. 51. Rated 250-0-250 volts, 100 mA. 25/-; (b) H.T.52. Rated 350-0-350 v., 200 mA. 27/6; (c) H.T.53. Rated 500-0-500 v., 200 mA. 50/-; (d) Type 16H.T.56, 17/9; (e) Type 36H.T.75, 11/9; (f) Type 36E.H.T.35. Rated 2.5 kV, 1 mA, 17/6; (g) Type 36E.H.T.100. Pulse rating 5/6 kV, 20/6.

Mains Transformers. All New Stock with Primaries tapped for 200-250 volts. Secondaries (a) 250-0-250 volt, 60 mA, 6.3 v. (tapped 4 v.) 4 amp. and 5 v. (tapped 4 v.) 2 amp., 18/6 (also available with 350-0-350 volt at 18/6). Stern's 250-0-350 volt, 150 mA, 6.3 v. (tapped 4 v.), 4 amp. and 5 v. (tapped 4 v.) 2 amp., 41/6; (c) 250-0-350 v. 250 mA, 4 volt, 8 amp., 4 v. 3 amp. 6.3 v. (tapped 2 v.) 2 amp. and 6.3 v. 6 amp., 72/6, and many to other ratings.

Heater Auto Transformers: (a) tapped 2 v. 4 v., 5 v., and 6.3 volts 3 amps., 9/6; (b) 4 v. 3 amp. to 6 v. 2 amp. Reversible, 8/6; (c) 4 v. 2 amp. to 6.3 v. 2 amp. Reversible, 6/6.

Power Potentiometers. Bulgin adjustable slider type, max. 6 ohms 60 watt, or 14 ohms 60 watt, 12/6 each. Ex-Govt. Rotary Adjustable 50 ohms 60 watt, 5/9.

A 6-station pre-set Tuner. For Superhet circuits 465 Kc/s. A complete self-contained unit from which any 3 Medium W/band and 1 Long W/band Stations may be pre-selected, and then individually selected by turn of Rotary Switch. No Tuning Condensers required, only 4 connections are necessary, price 40/-.

Adjustable Mains Droppers. ½in. dia. x 2in. (a) .15 amp., 1,500 ohms, 5/-; (b) .2 amp., 1,000 ohms 4/3; (c) .3 amp. 600 ohms, 5/-.

KITS OF PARTS AND CONSTRUCTORS' ASSEMBLY OUTFITS

A MIDGET 4 STATION "PRE-SET" RECEIVER.

For 1/9 (Incl. Post)!! A complete set of Assembly Instructions, showing the COMPLETE CIRCUIT, together with a PRACTICAL COMPONENT LAYOUT and POINT-TO-POINT CONNECTION diagram, for the construction of a 4-station "PRE-SET" SUPERHET RECEIVER, for A.C. Mains 200-240 volts.
This Set is designed to receive three chosen stations on Medium Waveband and one on Long Wave, each station being then selected by the turn of a Rotary Switch, no tuning being necessary. It is of Midget size, being 8½in. x 4½in. x 7in. high, when fully assembled and has the performance of a far more expensive ready-made Receiver, but can be built for about half the price of such a manufactured set.
We can supply the Set either as a complete KIT OF PARTS, or by supplying the individual Components separately. The complete price details, including an individual COMPONENT PRICE LIST is included with the above Assembly Instruction publication at 1/9. The detailed instructions and diagrams make the assembly of the Set very simple. An attractive Walnut finished Wood Cabinet is available to accommodate the Set.

A MAINS or BATTERY "PERSONAL" SET

A complete KIT OF PARTS to build our MIDGET 4-VALVE SUPERHET PERSONAL SET, covering MEDIUM and LONG WAVES and designed for MAINS or BATTERY operation is now available.
This 2 Waveband Superhet Receiver is designed to operate on A.C. mains 200/240 volts, or by an "All-Dry" Battery, either method being selected by means of a Rotary Switch. It is so designed that the Mains Section (size 4½in. x 1½in. x 3½in.) is supplied as a separate unit, which may be added at any time. The kit therefore can be supplied either as an "All-Dry" Battery Personal Set, or as a Midget Receiver for combined Battery/Mains operation.
The circuit incorporates Delayed A.V.C. and Preselective Audio Feedback. A Rola 4in. P.M. Speaker with generous size Output Transformer ensures excellent quality reproduction. Ready Wound Frame Aerial, Fully aligned I.F. Transformers, and a Drilled Midget Chassis are included. Valve line-up: 1.R.5(F.C.)1 T.4 (I.F. Amp.), 1.S.5 (Diode Det. and Audio Amp.) and 3S.4 (Output Tet.).
We can supply the Set, either as a COMPLETE KIT OF PARTS (with or without the Mains Unit), or by supplying the Components separately. The complete price details, including an INDIVIDUAL COMPONENT PRICE LIST, is included in our Publication on the Set. This publication is available for 1/9 (incl. post), and in addition to the detailed Assembly Instructions it contains, it also shows the COMPLETE CIRCUIT, with a PRACTICAL COMPONENT LAYOUT and POINT-TO-POINT CONNECTIONS, which in themselves enable the Set to be quite easily assembled.
An attractive Walnut Finished Cabinet, size 9in. x 5½in. x 5½in., of the hinged-lid type and suitable to house the combined set is available for 21/6
A Midget T.R.F. Battery Portable "Personal" Kit. A complete Kit of Parts to build a Midget 4-valve All-dry Battery Personal Set. Consists of Regenerative T.R.F. Circuit employing Flat Tuned Frame Aerial, with Denco Iron Dust Cored Coil, thereby ensuring maximum gain for Single-Tuned Stage covering Medium Waveband.
Valve line-up: 1T4 (H.F. Ampl.), 1T4 (Detector), 1S5 (1st A.F.) and 3S4 (output). Includes latest Rola 3in. Moving Coil Speaker, and a Chassis already drilled and shaped. A consumption of only 7 mA ensures long battery life. The Kit is designed for a cabinet, minimum size 6½in. x 4½in. x 3in. We can supply the Set either as a COMPLETE KIT OF PARTS, or by supplying the Components separately. The complete price details, including an INDIVIDUAL COMPONENT PRICE LIST is included in our publication on the Set. This publication is available for 9d. (incl. post), and in addition to the very detailed Assembly Instructions it contains, it also shows the Complete CIRCUIT with a PRACTICAL COMPONENT LAYOUT and POINT-to-POINT connections, which in themselves make the assembly of the Set very simple.

A Complete Kit of Parts to build a "Midget" "All-Dry" Battery Eliminator, giving approx. 60 volts H.T. and 1.4 volts L.T. This Eliminator is suitable for any 4-valve Superhet Personal Set requiring H.T. and L.T. voltages indicated above. The Kit is quite easily and quickly assembled and is housed in a Light Aluminium Case, size 4½in. x 3½in. x 3½in. It can therefore be accommodated inside most makes of Personal Sets. Price of complete Kit, £2/2/6.

"Wireless World" Midget A.C. Mains 2-valve Receiver. We can supply all the components, including valves and M/coil Speaker to build this set as specified in the March 1950 issue at a total cost of £3/10/-. Reprint of detailed assembly instructions and circuit supplied separately for 9d.

"Wireless World" Midget A.C. Mains 3-Valve Receiver. Covering Long and Medium Wavebands. We can supply all the Components, including Drilled Chassis, Valves, Moving Coil Speaker, etc., to build this Set, as specified in the Feb. 1950 issue at a total cost of £4/17/9 including a reprint of the instructions Assembly Instructions and Circuit (this is available separately for 9d.) and Practical Components Layout with "point-to-point" connections. An attractive **Walnut Finished Cabinet** is now available for this W/World 3-Valve Set at 21/-, or it can be supplied with a complete Dial and Drive Assembly which includes the latest Station Name Dial and Dial Escutcheon, and a Combined Switch/Volume Control to effect very slight modification. Inclusive price, 25/- (Dial and Drive Assembly with Switch/V. Control supplied separately for 14/-).

We can supply all the Components, including Valves, M/Coil Speaker, etc., to build a **Midget A.C./D.C. Mains T.R.F. 3-Valve (Plus Metal Rectifier) Receiver** as designed and specified by a popular Technical Magazine, at a total cost of £5/9/6. A reprint of the assembly instructions, and layout available for 9d.

An Entirely Complete 3-Valve Amplifier Kit of Parts. Operation on A.C. or D.C. mains 200-250 volts. Has an output of max. 4 watts, with valve line-up 6K8, 6J7 and U31. A matched 5in. Moving Coil Speaker is supplied. Price, including Wiring Diagrams, £4/12/6.

FOR UNDER £6!! A complete KIT OF PARTS including Drilled Chassis and Valves, to build a 6 to 9 Watt Push-Pull Amplifier, for operation on A.C. mains. Is suitable for use with Magnetic Crystal or Light-weight Pick-up and incorporates Tone Control. Theoretical and Practical diagrams supplied. Price of Complete Kit, £5/18/9. Price of Amplifier Chassis, completely assembled, £7/10/0. Circuit and component list separately 9d.

TELEVISION!! The "Viewmaster" Televisor, assembly instructions showing Wiring Diagram and Practical Component Layout available for 5/-. We have the specified Components, including the T.C.C.—Bulgin—Morganite—W.B.—Westinghouse—Pinnacy—Colvern, etc., outfits in stock. We can supply this Televisor by the individual stages (as published) with the Chassis and/or by separate Components. Complete price details can be obtained on application.

A 3-POLE INDUCTION MOTOR, ideal for gram. motor, fans, etc., consumption 21 watts, speed (light), 2,750 r.p.m. 38/6.

A 4-POLE INDUCTION MOTOR, ideally suited for gram. motor, wire and tape recorders, and any application demanding a constant speed and vibration free motor. For A.C. mains, 100 to 250 volts operation, speed 1,400 r.p.m., consumption 14 watts, size 3½in. x 3 x 7/16in. x 2½in. 47/6.

THE NEW DECCA 3-SPEED GRAM. UNIT. A complete Unit, including Turntable and Pick-up for 33-45 and 70 r.p.m., price £11/2/6; or Motor and T/table only, 67/3/4; and Pick-up only (for 3 speeds), 43/19/4.

We have a limited number of COSMOCORD G-P.26 PICK-UPS in stock, price 23/11/5.

★ Send 6d. P.O. for our NEW STOCK LIST, showing many KITS OF PARTS for Sets and Battery Chargers and "hundreds" of Wireless Components. When ordering please include postage and packing.

STERN RADIO LTD., 109 and 115 FLEET STREET, E.C.4

Telephone: CENtral 5814 and 2280

LASKY'S RADIO

FIRST AGAIN ! AMPLIFIER SCOOP

BRAND NEW & UNUSED

FAMOUS MANUFACTURE NOT EX-GOVERNMENT

TYPE J/RA/1. 30 watts.

HEAVY DUTY AMPLIFIER. Rack mounting, grey crackle finished. Uses KTZ63 and L63, feeding 2 KT66's in push pull. Rectifier type U52. Meter and switch for checking all current readings. Panel light, bass, brilliance and gain controls. Size: 19in. × 12in. × 12in. on a chassis 4½in. high.

LASKY'S PRICE £13.19.6
Carriage and Packing 25/- extra.

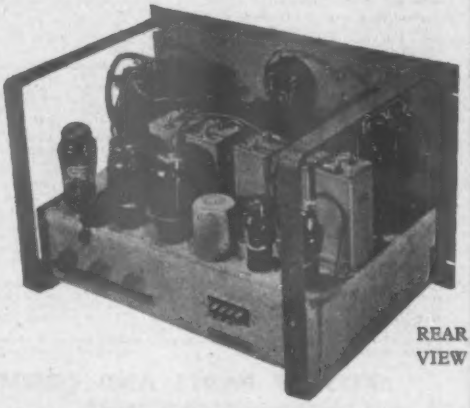

REAR VIEW



J/RA/2. 10-12 WATT CHASSIS AMPLIFIER. Uses an L63 feeding 2 KT61's in push pull. Rectifier type U50. Size 6in. × 17in. on 2in. chassis.

LASKY'S PRICE £7.19.6
Carriage and packing 10/- extra.

Limited Quantity
L.S.L. PORTABLE VALVE AND CIRCUIT ANALYSER.
LASKY'S PRICE £10.19.6
Complete. Carriage 10/- extra. Brand new and unused. Details available.

CARBON HAND MICROPHONES. Heavy brass case, chrome plated. Complete with screened cable.

LASKY'S PRICE 39/6
Postage and pkg. 3/6.

TABLE MICROPHONE STAND. Two sections, chrome plated. Crackle finished base.

LASKY'S PRICE 21/-
Post, pkg. 2/6 extra.

THESE AMPLIFIERS ARE BRAND NEW MANUFACTURER'S SURPLUS, AND NOT EX-GOVERNMENT. Mains working 200-250 volts 50 c.p.s. Supplied complete with brand new Marconi valves, fully guaranteed. Only the highest quality components have been used, and they are comparable with goods at double and treble the price offered. For full data and specifications of the equipment offered send a 2½d. stamp and name and address. (Block letters please.)

LASKY'S RADIO

370 HARROW ROAD, PADDINGTON, LONDON, W.9

(Opposite Paddington Hospital) *Telephones:* CUNningham 1979 and 7214
Hours: Mon. to Sat. 9.30 a.m. to 6 p.m., Thurs. half day 1 p.m. Send a 2½d. stamp with your name and address (in block letters please) for a copy of our current stock list giving details of our supplies of new manufacturers' surplus equipment and ex-Government radio, radar and valves, etc

TELEVISION CONSOLE CABINETS

DE LUXE BEAUTIFUL WALNUT VENEER

For 9, 10 or 12in. cathode ray tubes. Beautiful figured medium walnut finish, with high polish. Fitted with shelf for receiver, glass, speaker baffle and fret, rear tube protector, and castors for easy movement. Undrilled. Suitable for use with the Viewmaster, "Electronic Engineering," "Practical Television," "Practical Wireless," and "Wireless World" televisors.

LASKY'S PRICE

£8 . 10 . 0

Carriage 12/6 extra.
Outside dimensions of cabinet: 17½in." × 16½in. × 32in. high.
Why not convert your table receiver to a console?

BRAND NEW AND UNUSED. CATHODE RAY TUBES. COSSOR 108K. 10" Magnetic tube. Uses a special ion trap which prevents screen burns. **LASK'S PRE BUDGET PRICE £12.12.0** Carriage and insurance 22/6 extra.

I.F.F. RECEIVER TYPE R3168. BRAND NEW AND UNUSED. IN ORIGINAL CARTONS. Contains 8 new valves: 4 SP41, 1 BA50, 1 VR78, 2 CV6. Also a host of components, coils, condensers, resistances, etc. A motor generator with input of 24 volts, and output of 490 volts.

LASKY'S PRICE 25/-
Carriage 3/6 extra.

CONDENSERS. ALL BRAND NEW.

8 mfd. 500 v.w.	3/6
8 mfd. 450 v.w.	3/3
16 mfd. 500 v.w.	4/6
16 × 16 mfd. 450 v.w.	5/6
25 mfd. 25 v.w.	1/11
8 × 16 mfd. 500 v.w.	5/6
60 × 100 mfd. 350 v.w.	8/6
64 mfd. 500 v.w.	6/6

Postage extra.

VIBRATOR PACKS. Brand new, in original cartons. Manufactured in U.S.A. For 6 or 12 volt input. Output 300 volts, 60-80 m/a. Supplied complete with 4-pin non-synchronous vibrator and either OZ4 or 6X5 rectifier. Size of unit:—7in. × 5in. × 3½in.

LASKY'S PRICE 35/-
Postage and packing 2/6 extra.

COMMUNICATIONS RECEIVER. TYPE P.C.R. By Philips. Perfect condition. Aerial-tested before despatch. 6 valve superhet circuit: R.F., F.C., two I.F.s, D.D.T., pentode output. Frequency coverage: 16-50 mtrs.; 200-550 mtrs.; 800-2,500 mtrs. Fitted in metal case, black crackle finish, with built-in loudspeaker. Flywheel tuning. May be used with any suitable power pack. Supplied complete with 6 brand new Mullard valves. 3 EF39, 1 ECH35, 1 EBC33, 1 EL32.

LASKY'S PRICE £10 . 10 . 0 Carriage 10/- extra.

Power pack for P.C.R. Receiver. 12 volt.

LASKY'S PRICE 39/6 Carriage 5/- extra.

CAR RADIO PLUG SUPPRESSORS. Brand new Ex-Govt. Normally listed at 1/6 each.

LASKY'S PRICE 1/- each, 10/- per dozen. Post Free.

AMERICAN AIR CORPS RECEIVER TYPE BC454. Brand new in original cartons. Frequency range 3-6 Mc/s. Contains 6 valves: 3 12SK7, 1 12K8, 1 12A6, 1 12SR7. Also dozens of miniature components, resistances, condensers, etc. Built-in black crackle metal case, lightweight size, 11in. × 5in. × 5½in. Weight 10lb.

LASKY'S PRICE 55/- Carriage 3/6 extra.

PLESSEY TELEVISION

Line EHT Trans.	21/3
Focus Ring	19/6
Line width coil	8/9
Boost choke	5/-

SHORT-HORN WEATHERPROOF SPEAKERS BRAND NEW AND UNUSED

Complete with cable and mounting bracket. 15 ohm speech coil. Listed at nearly £12.

LASKY'S PRICE 89/6 carriage 10/- extra.

EX-A.M. COMMUNICATION RECEIVER TYPE R1155. BRAND NEW IN WOOD TRANSIT CASE. Aerial-tested before despatch. Supplied complete with 10 valves. Circuit: B.F.O., A.V.C., R.F. Amp., two I.F. stages, magic eye, etc. 5 frequency ranges: 18.5-7.5 Mc/s.; 7.5-3.0 Mc/s.; 1,500-600 kc/s.; 500-200 kc/s.; 200-75 kc/s.

LASKY'S PRICE £12.10.

Carriage (in wood case), 7/6 extra. Full modification data and circuit details supplied.

WESTINGHOUSE BOOST E.H.T. KIT. Contains 1 36EHT40, 2 meg resistance and 2 TCC .001mfd. 6Kv condr. **PRICE 30/-** plus 1/- post.

T.V. SCAN COILS FOR LINE AND FRAME. Brand new, manufacturer's surplus. For 9in. or 12in. c.r. tubes.

LASKY'S PRICE 19/6 Post 1/-.

RADAR INDICATOR UNITS TYPE 162C. BRAND NEW IN MAKER'S ORIGINAL WOOD CASE. Contains 2 cathode ray tubes, one 6in. VCR517 and one 3in. VCR139. Also the following valves: three SP61, one 6J5, three EA50, one D1. Dozens of components, coils, resistances, condensers, seven pot. meters, etc. Enclosed in metal case, size 12in. × 9in. × 19in. Weight 40lb. Carriage

LASKY'S PRICE 79/6 7/6 extra.

P.M. TELEVISION FOCUS MAGNETS

Suitable for any type of cathode ray tube. Tetrode

LASKY'S PRICE 15/- Postage 1/- extra.

Triode

LASKY'S PRICE 16/11 Postage 1/- extra.

GERMANIUM CRYSTALS

LASKY'S PRICE 3/- each. 8 for 20/-. Post Free.

PACKARD BELL TYPE K. MICROPHONE PRE-AMPLIFIERS. BRAND NEW AND UNUSED. Contains 2 valves 1 6SL7 twin triode and 1 28D7 twin pentode. Also associated components, input and output transformers, etc. Contained in lightweight metal case. Size: 4½in. × 5in. × 4in. Designed to increase the output of low gain pick-ups and microphones. Supplied with full circuit and details.

LASKY'S PRICE 16/6 Postage 1/6 extra.

SAFETY FIRST. Fused test prods. Fully insulated pencil type with retractable point. Contact is only made when desired by pressing top. Each prod contains a cartridge type fuse and spring.

LASKY'S PRICE 4/11 per pair (one red, one black). Post 6d. extra.

PHOTO ELECTRIC CELLS TYPE VA28. Requires 100 volts D.C. or peak A.C. to function. Ideal for experimental work.

LASKY'S PRICE 12/6 Postage 1/6 extra.

EX-A.M. RECEIVERS TYPE R1481. BRAND NEW AND UNUSED, IN ORIGINAL WOOD CASES. Frequency coverage: 66-86 Mc/s. Description: Contains 11 valves: 1 VR65, 1 VR66, 4 VR53, 2 VR54, 1 6J5, 1 VS70, 1 VR57. Large tuning scale with slow motion drive, 0-5 m/a tuning meter, R.F. and L.F. gain controls, jack sockets for line and 'phone. Totally enclosed in metal case, grey enamelled, with plated handles. Size 18in. × 10in. × 11in. Weight packed, 54lb. Supplied complete with circuit and calibration chart.

LASKY'S PRICE 99/6 each. Carriage 10/- extra.

CLYDESDALE

Bargains in Ex-Service Radio and Electronic Equipment

OLD T.V. FAITHFULS

AVAILABLE—BRAND NEW

INDICATOR TYPE 6 AND TYPE 6E. These units are mentioned in the INEXPENSIVE TELEVISION design and are complete and brand new, being fitted with a VCR97 Cathode Ray Tube, this tube is probably the most adaptable of all the radar CRT's for T.V. operation.
The indicator unit is fitted with 4/VR91 (SP50), 5/VR54 (EB34) plus a host of T.V. components, condensers and potentiometers.
The complete unit is enclosed in a metal box, 18in. × 9½in. × 7½in., finished in grey.

CLYDESDALE'S PRICE ONLY **£3/19/6** CARRIAGE PAID

Please include 10/- extra for transit case.

12.25 MCS. I.F. STRIP

H.38A. I.F. Strip by Pye provides a very compact I.F. sub-chassis complete 8/SP61 valves. The Chassis is wired for IF operation and input leads are tag terminated at rear end of unit. Coax input and output sockets are mounted on the front panel. Dim. 18in. × 9in. × 4½in.

CLYDESDALE'S PRICE ONLY **47/6** each POST PAID

Chassis, less valves, 17/6 each. Post paid.

VIEWING UNITS

EX-R.A.F. Indicator Unit 62 consists of a host of TV Components plus a VCR97 Cathode Ray Tube and various Valves 1/6/SP61's, 2/EB34's and 2/EA50's.
The Indicator Unit 62 circuit may be useful for your TV experiments in its existing state. Circuit details are available at 1/3 each.
Complete and enclosed in a metal case 18 × 8½ × 11½in.

CLYDESDALE'S PRICE ONLY **67/6** each POST PAID

Include 10/- for Transit Case.

WE STILL HAVE!

Brand new R.1355 I.F./VIDEO Receiver for T.V. vision or sound, readily available for use on your specific T.V. frequency in that the R.F. is fed in via a removable R.F. unit, i.e. the R.F.24-25-26 or 27. Space for an integral mains power pack is provided by the removal of the existing 80v/400 cycle pack.
The R.1355 is complete with valves, 5 stage of 7.5 Mc/s. I.F. (SP61's) Detector (EA50), Video amplifier (SP61) and Cathode follower (SP61), also an EHT rectifier (SU2150) and HT rectifier (5U4G).
Enclosed in a metal case 18in. × 16½in. × 7½in.

CLYDESDALE'S PRICE ONLY **67/6** each CARRIAGE PAID

Please include 10/- extra for transit case.

AN APA-1 RADAR UNIT

Consists of an enclosed self-contained repeater amplifier unit with high frequency (400 cy.) power supplied both E.H.T.-H.T. and L.T.
11 valves include: 1/2x2 EHT rectifier, 1/6x5 Rectifier 1/6G6 Power amplifier, 7/6SN7, R.F. Amplifier, 1/6H6 D/Diode, and 2 R.P.L. Cathode Ray Tube complete with base, metal shields mounting rack and 6ft. core braided interlock.
The unit is a wealth of components, i.e. condensers, resistors, etc., Circuit supplied with each unit.

CLYDESDALE'S PRICE ONLY **£4/19/6** each CARRIAGE PAID

CIRCUITS

Circuits for the VIEWMASTER television receiver available price 5/-, for both (A) LONDON and (B) BIRMINGHAM frequencies. Circuits for Ex W.D. Radar equipment, i.e., R1355, Indicators 6 and 62, and various others also available at low prices.

MISCELLANEOUS

STILL AVAILABLE AS PREVIOUSLY ADVERTISED

T.1154 Transmitter	£7 18 6
R.1155 Receivers	£12 12 0
Or complete with A.C. Mains Power Pack	£18 10 0
R28/ARC-5 V.H.F. Receivers	£1 17 6
W.S.18 Receiver Chassis	17 6
Circuit for W.S.18 Receiver	4 6
CRV.46151 Marine Receiver	£5 19 6
H176 Metal Mine Detector	£5 19 6
AC Mains Power Unit Type 3	£4 10 0
WS-38 Modulator Amplifier	£12 10 0
No. 43 Tx. Supply Unit Rectifier	£16 0 0
Type 6A Receiver	£2 5 0
R.1355 D.F. Loop	£3 10 0
BC950-A-40 Mod. Kit	10 0
455/515 Kc/s Band Pass Filter	7 6
BC-625A Partly Stripped	10 0
Magnetic (Marching) Compass	£1 1 0
DLR-1 Headphones with Bands	7 6
20H/120 M/a 400 ohm choke	12 6
25/60 M/a 250 ohm choke	6 6
Infra-Red Converter Cell	12 6

V.H.F. RECEIVER

The Stratton P46 for conversion on to 2 metres. Crystal controlled 86/98 Mc/s. and includes 1/EF54 (RF), 1/EF54 (MIX), 1/ECC2-2/EF54 (Osc. and Mult.), 2/EF39 (IF), 1/EB34 (DET/AVC), 16/35 (1st Aud.). 6V6 output. The receiver is enclosed in a die-cast frame with louvred cover 11½in. × 6½in. × 4½in. Less crystal.

CLYDESDALE'S PRICE ONLY **£3/19/6** POST PAID

NEW ARRIVALS—FRESH EQUIPMENT

UHF/TV RECEPTION

H492. **Ex. R.A.F. 3176** consists of a single deck chassis comprising of 2 U.H.F. untuned R.F. stages employing RL37 (CV66) safeguarded by a V1-607 static discharge tube, a variable oscillator stage EL16-EC52 followed by 5 stages of I.F., EF50 (VR37's) with a cathode follower and amplifier employing a further 2 EF50 (VR91) and 2 EA50's as detector and DC restorer stages. A filter stage using an HF50 (VR91) is mounted above the chassis and is stabilised with a CV166.
EHT and HT supplies (high frequency primary) employs a 5Z4 and VU111.
All connectors, plugs, switches etc., are brought out to the front panel.
The unit is enclosed in a metal box 18in. × 9in. × 8in., finished in grey.

CLYDESDALE'S PRICE ONLY **£4/12/6** CARRIAGE PAID

FOR EXPORT ONLY

Brand new **WIRELESS SET No. 38 Mk. 2. Transmitter/Receiver** for portable use on 7.4 to 9 Mc/s. Complete with all accessories. PLEASE ENQUIRE FOR DETAILS PRICE, ETC., QUOTING M.519.

U.H.F. ANTENNA

Ex. R.A.F. U.H.F. ANTENNA, mounted on a moulded streamlined base into which is fitted an EA50 untuned detector stage.
The antenna measure 22.5 cm. of solid copper construction and all connections are brought out to a 3 pin screened connector at the base of the body.
Dimensions of complete unit: 13in. × 4½in. × 2½in.

CLYDESDALE'S PRICE ONLY **12/6** POST PAID

SIGNALLING

Ex. R.A.F. SIGNAL LAMP TYPE 6. 5A/2254 fitted with a 14in. deep, 4½in. diam. reflector and a 12-volt 20 watt pre-focus lamp.
The signal lamp is mounted with two handle grips on either side of the carrier frame and is triggered by a finger pressure lever on the right-hand grip. Alignment sights with a rubber eye piece are also fitted, also 6 feet of rubber covered Ducol cable terminated with a 2 pin, 2 amps, plug.
The complete lamp is despatched in a wooden transit case, 9½in. × 8in. × 6½in., with leather handle.

CLYDESDALE'S PRICE ONLY **32/5** CARRIAGE PAID

Spare lamps are available at 1/6 each.

BREAKDOWN

Ex. R.A.F. R.3547 comprises of a chassis of remarkable breakdown value and comprises of a 24-volt D.C. reversible motor, 700-1 gear box, sweep switching unit, relays, over 100 various resistors, 50 Mica condensers, 11 potentiometers and numerous various components.
Included in the chassis is a 45 Mc/s I.F. strip employing EF50's and a total of 22 valves, i.e. 15 EF50's, 3 EB34's, 2 EF36's, 2 VR77's, 1 EA50.
Complete unit is housed in a metal box 18in. × 12in. × 7½in., finished in black.

CLYDESDALE'S PRICE ONLY **£5/19/6** CARRIAGE PAID

AMPLIFIER A2098A. Consists of a steel chassis 12in. × 8½in. × 1½in. with front panel—mounting an 80v. 400 cycle power pack employing a 5U4 and a 53 volt bias power employing a half wave metal rectifier together with 4/1 Mfd. Condensers, 1/3 Mfd. Condenser, 2 Chokes, 1/EF50 and 2/807's (5B/250A), numerous resistors, push switch, jack, etc. Enclosed in a metal case 12in. × 8½in. × 7½in.

CLYDESDALE'S PRICE ONLY **29/6** each CARRIAGE PAID

MULTI-WAY CABLE

H.504—YAS715. 5 pairs No. 1 Connector. This is a 10 way braided sheathed cable in 15ft. lengths in new condition.

CLYDESDALE'S PRICE ONLY **5/-** POST PAID

T.V. RECEPTION

R.1355. RECEIVER R.3091. Comprised of two individually built chassis, hinged at one end to allow the two sections to be closed together. One chassis comprises of an R.F. stage, Mixer, and Oscillator, 3/EF50's, followed by a 45 Mc/s I.F. strip employing 5 VT65 (SP61's) and an EA50.
The remaining section is built up with the "following" stages of the R.F. deck, EHT and HT power packs (high frequency primary transformers), a 24V D.C. motor and antenna sweep switch assembly, together with various condensers, etc.
The two sections hinge together as one unit and is enclosed in a metal retainer, 18in. × 9in. × 8in., finished in R.A.F. blue.

CLYDESDALE'S PRICE ONLY **£4/12/6** CARRIAGE PAID

V.H.F. TRANSMITTER

H517—65-96 Mc/s Phone transmitter by STRATTON. This transmitter is extremely suitable for "144" modifications and consists of a 6V6 crystal oscillator stage (3 Mc/s plus) RK34 multiplier stages and RK34 final. Speech and modulation by two 6N7's.

The unit is practically complete except for valves—there have been one or two of the inductances removed, but these would need to be replaced in any case for 2 Meter operation.
Complete in die-cast mounting with louvred cover 14in. × 8in. × 7in., finished in grey.

CLYDESDALE'S PRICE ONLY **27/6** CARRIAGE PAID

Circuit details will soon be available, also details of a suitable power pack.

U.H.F. TRANSMITTER

JEFFERSON-TRAVIS U.F.-2. This unit consists of a 3 valve transreceiver chassis, which is complete except for the tuning inductance, and one or two connections to the amplifier valve. The original unit operated on approx. 70 Mc/s.

The transmit/receive side of the unit has been left untouched with all transformers, valve holders and relative components in place but less valves—original valves were 2/6V7's and a 12J5.

The U.F.-2 consists of two units mounted by means of their front panels—one contains the R.F. tuning control, T/R switch and V/control with the antenna insulation feeding through the panel. The second panel mounts a 3 inch P.M. speaker, telephone handset jack and change over switch. Both panels are "silver" finished, measuring 8in. × 8in.
Complete U.F.-2 is housed in a black crackle cabinet approx. 10½in. × 10in. × 7in., fitted with handles.

CLYDESDALE'S PRICE ONLY **50/-** each CARRIAGE PAID

Circuit details will be available shortly.

Order direct from :—

CLYDESDALE SUPPLY CO. LTD. 2 BRIDGE STREET GLASGOW - C.5

Phone : South 2706/7. Branches in Scotland, England and Northern Ireland.

D. COHEN

RADIO & TELEVISION COMPONENTS

MAINS TRANSFORMERS

Primary 200-250 v. P. & P. on each 1/6 extra.
250-0-250, 100 mA., 6 v. 3 amp., 5 v. 2 amp. Upright mounting, 17/6.
250-0-250, 60 mA., 6 v. 4 amp. (to be used on common heater chain with 6 x 5 rectifier), 13/6.
280-0-280, 80 mA., 6 v. 3 amp., 4 v. 2 amp., drop-through, 14/-.
Drop thro' 350-0-350 v. 70 mA. 6 v. 2.5 amp., 5 v. 2 amp., 14/6.
Semi-shrouded, drop-thro' 280-0-280 6 v. 3 amp., 5 v. 2 amp., 16/-.
Semi-shrouded, drop-thro' or upright mounting 280-0-280 80 mA., 4 v. 6 amp., 4 v. 2 amp., 12/6.
Auto-wound H.T. 280 volts at 360 mA., 4 v. 3 amp., 2 v. 3 amp., or 6 v. 3 amp. Separate 4 v. 3 amp. rectifier winding (upright or drop-thro'), 10/6.
350-0-350 v. 120 mA., 4 v. 6 amp., 4 v. 3 amp., drop-through, 21/-.
Auto-transformer, various combinations of voltages including 110 v. 70 watt, and 3/4 volts windings at 1 amp., 2 volt 1 amp., drop-through or upright mounting, 10/6.
Heater Transformers Pri. 200-250 v., 6 v. 1½ amp., 6/-. P. & P., each 9d.

ELECTROLYTIC CONDENSERS

50 mfd. 50 work, 1/9
100 mfd. 12 v. work, 1/3.
50 mfd. 12 v. work, 1/-.
25 mfd. 25 v. work, 1/2.
16 x 8 mfd. 450 work, 4/-.
8 mfd. 450 v. work, 1/11.
250 mfd. 12 v. work, 1/3.
16 mfd. 500 v. 4/-.
8 mfd. 500 v., 3/-.
8 x 8 mfd. 450 work, 3/6.
32 mfd. 350 work, 2/-
32 + 32 mfd. small tube tag ends 200 v. work, 2/-.

P.M. SPEAKERS

	with trans.	less trans.
3½in.	—	10/-
5in.	14/-	11/6
6½in.	14/6	11/6
8in.	16/-	13/6

5in. Energised 750 ohm field with O.P. trans., 13/6.
P. & P. on each of the above 1/- extra.

THIS MONTH'S OUTSTANDING OFFER

465 Kc. Midget I.F.'s, Q. 120, size 1½in. long, 1in. wide, ½in. deep, by very famous manufacturer. Pre-aligned adjustable iron dust cores, per pair 12/6.

COIL PACK. 3 wave band, 16-50 metres, 180-550 metres, 1,000-2,000 metres. Iron cored coils, I.F. frequency 465 kc. Size 1⅞" high × 3½" wide × 2⅜" deep, complete with circuit diagram, tax paid 24/-. Post paid.

WALNUT BAKELITE CABINET. Size 12in. long × 7¼in. high × 6½in. deep, scale aperture 3½in. × 4ins.. louvred front, complete with 3 wave-band scale, back plate, 5 valve superhet chassis and back. 19/6 post paid.

OUTPUT TRANSFORMERS. Standard type 5,000 ohms imp., 2 ohms speech coil, 4/9 ; Push-Pull 6 v. 6 matching 10 watt 2 ohms speech coil, 6/9. Miniature type to suit 155, 5/-.

SET OF 3 BROWN KNOBS marked "wave change," "tuning," and "volume" 1/6.

MIDGET COMPONENTS. Twin gang ½in. diameter, ½in. long. (The dimensions of this gang are slightly deeper than a standard volume control.) Pair Medium and Long iron cored T.R.F. Coils ½in. long × ½in. wide complete with a 4-valve all dry circuit. Both above items 8/6, post paid.

ALL DRY A.C. MAINS SUPPLY UNIT, size 3½in. long × 2½in. wide × 1½in. deep. We can supply a complete all-dry circuit, using the above Midget Components to incorporate the above Power Unit, 19/6, post paid with circuit.

MIDGET BAKELITE CABINET. 7in. × 5½in. × 5in. c/w. 5-valve S/H. chassis med./long wave scale and back (takes std. twin gang condenser and 3½in. speaker), 15/-.

LINE AND FRAME COIL ASSEMBLY. Frame coils wound but not fitted (full instructions supplied). High impedance frame ; low impedance line, matching 5-1, 8/6.

PRE ALIGNED MIDGET 465 Kc. Q.120, 9/- per pair, post 6d.

MINIATURE 465 Kc. I.F.s. Type M4008. 14/-, plus 6d. post and packing.

MINIATURE 465 Kc. I.F.s (slightly larger than the above item) Q.120, per pair, 18/-.

IRON CORED 465 Kc. WHISTLE FILTER, screen, each 2/-.

VALVE HOLDERS. Paxolin International octal, 4d. each. Moulded International octal, 7d. each. EF50 ceramic 7d. each. Moulded 807G slightly soiled 6d. each.

LINE CORD. 3-way 0.3 amp., 180 ohm per yard. 1/3 per yard.

CERAMIC P.F.S. 3 each of the following : 330, 220, 180 and 82, 2/6.

TRIMMERS. 5-40 pf., 5d. ; 10-110, 10-250, 10-450 pf., 6d.

TWIN GANG .0005 TUNING CONDENSER. 5/-. With trimmers, 7/6 Post and packing, 6d.

TWIN GANG MIDGET .00037 with perspex dust cover and trimmers, 8/6. Post and packing, 6d.

MAINS DROPPERS. 0.3 amp., 460 ohms, tapped 280 and 410, 1/6 ; 0.2 amp., 717 ohms, tapped at 100 ohms, vitreous, 1/6 ; 0.3 amp., 950 ohms, tapped 700 and 825, 2/6 ; 0.2 amp. 1000 ohm, vitreous, tapped, 2/6. P. & P. on each, 3d.

VOLUME CONTROLS, by famous manufacturer. Long spindle and switch, ¼, ½, 1 and 2 meg., 4/- each. 20, 25 and 50 k., 3/6 each. Post and packing 3d. each.

VOLUME CONTROLS, by famous manufacturer. Long spindle less switch, 5 k., 50 k., 500 k., 1 meg., 2/6 each. Post and packing 3d. each.

GOVERNMENT SURPLUS. Removed from equipment but guaranteed : **Metal Rectifier,** 230 v. 80 mA., 5/-. **Metal Rectifier,** 300 v. 100 mA., 6/6. Post and packing on each, 6d.

WAVE CHANGE SWITCHES. 6-pole 3-way, 2/- ; 3-pole 2-way, 1/2 ; 4-pole 3-way, 1/9 ; 5-pole 2-way midget, 1/9 ; Post and packing 3d. each.

MINIATURE BUTTON NEON INDICATOR, complete with brass batten holder 200/250 v., 2/-.

TELEVISION MASKS

White Rubber. 9in with glass 10/6. White Rubber 12in. with glass, 15/-. 15in. white rubber mask, soiled, 12/6, plus 1/- P. & P.

CONSTRUCTOR'S PARCEL comprising : 5-valve superhet chassis with I.F. trans. and V/H. cut-outs, 13½in. × 6in. × 2in. with L.M.S. scale 7in. × 5in., back plate and two supporting brackets. Drive drum, spindle and pointer, mains trans. G.E.C. 350-0-350 70 mA., 6 v. 2.5 amp., 5 v 2 amp., and Plessey 6in. P.M. energised 2,000 ohm field with 5,000 ohm impedance, O.P. trans., 33/6. Post and packing, 2/-.

CONSTRUCTOR'S PARCEL comprising : 5-valve superhet chassis with I.F. trans., and V/H. cut-outs, 13½in. × 6in. × 2in. with L.M.S. scale 7in. × 5in., back plate and two supporting brackets. Drive drum spindle and pointer, 7/6. Post and packing 1/6.

CONSTRUCTOR'S PARCEL comprising : twin gang with feet, pair long and medium iron cored T.R.F coils, 4 octal V/H., 3-pole 2-way switch Erie 20k. pot. w/s., heater trans. 220-240 v. 1 amp., 2 yds. flat silk flex, 3 black knobs, chassis 10½in. × 5½in. × 2in. with speaker and V/H cut-outs, metal rectifier 60 mA., 230 v. and 32 + 32 mfd. 200 v., 19/6, post paid.

CONSTRUCTOR'S PARCEL comprising : Chassis 10½ × 5½in. × 2in. with speaker and valve holder cut-outs, R. and A. 6½in. P.M. with transformer, twin gang with feet, pair medium and long wave iron cored T.R.F. coils. Four International Octal valve holders, wave-change switch and Erie 20k pot with switch, 25/-, plus 1/6 post and packing.

CONSTRUCTOR'S PARCEL comprising chassis 10½in. × 5½in. × 2in. with speaker and valve holder cut-outs ; Rola 5in. P.M. with O.P. trans. ; twin-gang with trimmers ; pair of T.R.F. coils ; Four international Octal valve holders ; wave change switch and Erie 20k pot. with switch, 19/6 plus 1/6 post and packing.

CONSTRUCTOR'S PARCEL comprising : Midget twin-gang with slow-motion drive ; pair midget 465 Kc. I.F.s ; frame aerial ; medium wave osc. coil and layer type H.T. and L.T. batteries 90 v. × 1½ v., and midget chassis, 21/-, plus 2/- post and packing.

CONSTRUCTOR'S PARCEL comprising : 5-valve superhet chassis with transformer cut-out, size 13½in. × 6in. × 2in., with L.M. and S. scale, size 7in. × 5in. Back plate, two supporting brackets, drive drum, pointer, two-speed spindle, twin gang condenser Mains transformer 250-0-250 v. 60 mA., 6 v. 4 amp. Pri. 200-250, 6½in. speaker and 6 × 5 rect. 35/- plus 2/- post and packing.

Terms of business:—Cash with order. All enquiries must be accompanied by stamped addressed envelope.
PLEASE NOTE—Regret no orders accepted from outside United Kingdom.

POST ORDERS ONLY

67 RALEIGH AVENUE, HAYES, MIDDLESEX

The complete story of the motor cycle

ASSOCIATED ILIFFE TECHNICAL BOOKS

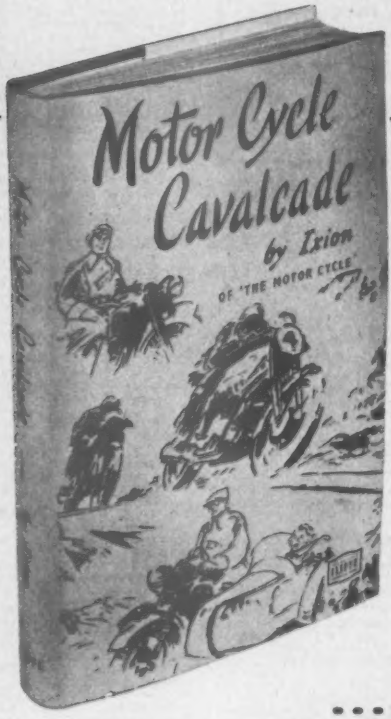

MOTOR CYCLE CAVALCADE

by "Ixion" of the "Motor Cycle"

Here is the complete and vivid story of motor cycling, told as a continuous narrative for the first time. "Ixion's" MOTOR CYCLE CAVALCADE gives the history of machines from 1884 onwards and tells the story of the men who designed, constructed and rode them. International T.T. events, trials and scrambles, the speedway, the motor cycle at war, star riders of yesterday and to-day, engine development and the making of records; all have their place in this great chronicle. Vividly written, packed with sparkling pictures, this book is one which every motor cycle enthusiast will want to read.

8¼in. x 5½in. 272 pp. **10s. 6d. net** *By Post 11s.*

...and for the enthusiast...

MOTOR CYCLES AND HOW TO MANAGE THEM

By "The Motor Cycle" Technical Staff

31st Edition. Based on the accumulated knowledge of many years' experience, this popular handbook is an authoritative, comprehensive guide to motor cycles, their care and maintenance, written in an easily understood manner. It deals with all types of power units and the construction and operation of various components. *7in. x 4¼in.* 290 *pp.* 4*s.* 6*d. net. By post* 4*s.* 10*d.*

MOTOR CYCLIST'S WORKSHOP

By "Torrens" of "The Motor Cycle"

5th Edition. Produced for the many who like to look after their own machines—maintaining, tuning, and where necessary overhauling them. It is a complete authoritative guide to workshop practice of the type which can be applied by the ordinary motor cyclist, with a special section devoted to tuning for speed and efficiency. *7in. x 4¼in.* 147 *pp.* 3*s. net. By post* 3*s.* 3*d.*

SPEED FROM YOUR MOTOR CYCLE

6th Edition. A book for the enthusiast, it covers the entire subject of a "strip and re-build," assuming the reader to be overhauling a fast machine. Every part is dealt with in detail. Finally there are many hints on the sport of racing.

7in. x 4¼in. 154 *pp.* 3*s.* 6*d. net. By post* 3*s.* 9*d.*

TWO-STROKE MOTOR CYCLES

10th Edition. Designed to help all owners and potential owners of one of the most popular types of motor cycle, this book gives a complete explanation of how a two-stroke functions, its construction, maintenance and general up-keep.

7in. x 4¼in. 135 *pp.* 3*s. net. By post* 3*s.* 2*d.*

YOUR AUTOCYCLE: and How To Get The Best From It

A helpful up-to-date guide giving hints and tips in easily understandable form on every aspect of autocycle ownership, from the purchase and learning to ride, to decarbonising the engine. *7in. x 4¼in.* 106 *pp.* 2*s.* 6*d. net. By post* 2*s.* 9*d*

Obtainable from all booksellers or direct from the Publishers:—

ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD ST., LONDON, S.E.1

GARLAND BROS

QUALTAPE MAGNETIC TAPE RECORDER : the modern, precision-made tape deck, as advertised this journal. Separately-motorised capstan drive, latest design heads. Complete kit of parts, requiring only pliers and screwdriver for assembly, £13/13/0. Send S.A.E. for particulars of our standard and high quality amplifiers, incorporating oscillator, for use with the above and other tape decks.

DECCA THREE-SPEED GRAM. MOTORS : for 33⅓, 45 and 78 r.p.m. Instant single-lever speed selection. For A.C. only, 100-250 v. 50 cycle operation. Price (incl. P.T.) £7/3/4. (Please note manufacture of two-speed model now discontinued.)

DECCA TURNOVER PICKUP : a high fidelity crystal pick-up with turnover head (two sapphires) for use on the above or other multi-speed motors. Price (incl. P.T.) £3/19/4.

AMPLIFIER 11/66 : An improved version of our Amplifier AC11, for those who desire good quality reproduction at low cost. Valve line-up is 6J5-6J5-KT66-5Z4. Output 5 watts. Volume, tone and variable feedback controls. High grade output transformer. Chassis completely isolated from mains. Complete kit, including punched chassis, all valves and components, with circuits and instructions, £8/2/6. Amplifier wired and tested, £6/2/6.

VALVEHOLDERS : Ceramic : UX5 (807, etc.), 1/- each, 10/- doz. ; UX7 medium (1625, RK34, etc.), 1/- each, 10/- doz. ; B9G (EF50, etc.), 9d. each, 7/6 doz. Amphenol : Inc. Octal, 9d. each, 7/6 doz. ; Br. 7p, 9d. each, 7/6 doz. ; Br.5p, 9d. each, 7/6 doz. ; UX7 med., 9d. each, 7/6 doz. ; UX5 9d. each, 7/6 doz. Paxolin : Br.5, Br.7, UX4, UX5, UX6, UX7, 6d. each.

RACK-MOUNTED AMPLIFIER TYPE A.1104 : Made by Marconi Co. for the G.P.O., and mounted on 19in. racks, 5ft. 6in. high. Valve line-up (but valves are NOT included) MH4, MHL4, PX25-PX25 P/P, VU39. Power pack is for 200-250 v. 50 c. operation ; transformers are by Varley and all smoothing is by paper condensers. Push-pull output transformer is to 600 ohm. line. Output stage anode current is metered by 2½in. 0-200 mA. moving coil meter. Control panel contains, among other items, microphone transformer and a Westinghouse 12 v. 1A. bridge rectifier originally used to rectify amplifier output for relay operation. Unused but slightly store-soiled. Price £6/10/0, plus transport at cost.

SPECIAL PURPOSE VALVES : VS110 (S130), 5/- ; OC3/VR105 6/6 ; 7475 5/- ; VR116 5/- ; VT501 (TT11) 6/6 ; RK34 5/- ; VT60 (807) 7/6 ; CV73 4/- ; 9003 5/- ; 954 3/- ; CV1141 6/6 ; VGT128 (GT1C) 6/6 ; CV66 6/6 ; VR136 (EF54) 7/6 ; VR137 (EC52) 7/6 ; VU111 5/- ; VU133 3/6 ; CV54 3/6.

ACCUMULATORS : 2 v. 10 A/H. In black moulded bakelite case, unfilled and uncharged. 4/9 each.

L.F. CHOKES : 5 H. 100 mA. 3/6 ; 3 H. 200 mA. 5/-.

VARIABLE RESISTORS : 50 ohm. 1.5 A., with fine calibrated worm-gear adjustment. Ex-unused equipment. 7/6 each.

SELENIUM RECTIFIERS : 24 v. 1.2 A. bridge, 12/6 each. 350 v. 40 mA. half wave, 4/6. Both items ex-equipment, but tested and perfect.

MUIRHEAD DIALS : as used on G-units and R.1224a. Precision-made and incorporating a slow motion drive of the order of 50 or 60 to one ; ideal for tuning or test equipment. 6/6 each.

SWITCHPLUGS : 15 A. 250 v. 3-pin. Metal-cased chromed, 6/- each.

METAL-CASED CONDENSERS : .01/1,000 v. wkg. 9d. each, 7/6 per doz. 1/350 v. wkg. 9d. each, 7/6 per doz. Ditto, but screw-fixing and with long insulated leads, 9d. each, 7/6 per doz.

JUNEERO TOOL AND XACTO SLIDE GAUGE : as previously advertised, 27/6 each. Juneero Engraving Tool Kit, for operation on 200-250 v. A.C. 8/6. Juneero Punching and Rivetting Tool, 7/6. All Juneero spares and accessories in stock ; send s.a.e. for price list. Trade and overseas enquiries invited.

HIGH-CAPACITY PRECISION MICA CONDENSERS : by leading manufacturers. Accuracy plus or minus 0.5 (point five) per cent of stated value. Pure mica and copper foil.

(c)	0.035020 μF	1/6	(d)	0.040710 μF	1/6	(e)	0.055820 μF	1/6
(f)	0.065350 μF	1/6	(h)	0.082910 μF	1/6	(g)	0.087460 μF	1/6
(h)	0.108435 μF	1/9	(i)	0.123750 μF	1/9	(j)	0.147000 μF	1/9
(k)	0.205276 μF	2/-						

Many close tolerance standard values may be made up by parallel or other combination of above, e.g. : 4k+1+e = 1μF ; 2k+g=0.5μF ; c+f=0.1μF. (A table of over 150 series and parallel combinations of these condensers invaluable in calculating filter networks, etc., is available on receipt of 2½d. stamp.)

CONNECTING BLOCKS. Heavy construction, 20 way with 2 B.A set screws. 7⅛in. x 1in. x ⅝in., 2/6 each.

CONDENSERS (pFs). 2, 4, 10, 15, 20, 25, 50, 75, 100, 160, 200, 6d. each, 5/6 per doz. 300, 330, 500, 1,000, 5,000, 9d. each, 7/6 per doz.

H.F. CHOKES : 650μH, to pass 1 a., 1/3 each, 12/- per doz.

MICA T/X CONDENSERS : 500 pF, 1.5 A. at 4-7.5 mc/s. Test 5,000 v. A.C. for ten minutes. 6 for 5/-.

MAINS TRANSFORMERS : Pri. 0-200-220-240 v. Secs. 250-0-250 v. 80 mA., 0-4-6.3 v. 4 A., 0-4-5 v. 2 A. Electrostatic screen. Tag connections. Universal mounting. Each 18/6.

MAINS TRANSFORMERS : Pri. 0-200-220-240 v. Secs. 350-0-350 v. 80 mA., 0-4-6.3 v. 4 A., 0-4-5 v. 2 A. Electrostatic screen. Tag connections. Universal mounting. A truly all-purpose transformer. Each 18/6.

STABILIVOLTS : Type NSI. Voltage stabiliser and divider. Operating voltages 280 v., 210 v., 140 v., 70 v. ; max. electrode current, 80 mA. Again available. Each 10/-.

I.F. TRANSFORMERS : 465 k/c., standard size, capacity-tuned. Made for us by a leading manufacturer. Per pair, 12/6.

PLUGS AND SOCKETS : Pye angle, 1/- ; Pye straight, 1/3 ; B. & L. 5-pin, 1/6 ; B. & L. 7-pin, 1/9 ; B. & L. 10-pin, 2/- ; Jones 6-way, 1/6 ; Jones 8-way, 1/9 ; Jones 10-way, 2/- ; E.H.T. Single 1/-. The above prices include plug and socket in all cases. Pye T-pieces, 6d. Pye connectors, 6d. Now in stock : Pye Angle P. & S. to fit ¼in. cable. 1/3 complete.

WAFER SWITCHES : S.P. 3W. 1/- each ; 3P. 2W. 1/6 each ; 4P. 2W. miniature 2/- each ; S.P. 10W. 1/9 each ; S.P. 11W. 2/- each.

PUSH-SWITCHES : Type 10F 11062, G.P.O. pattern, D.P.C.O. non-locking, 1/6 each, 15/- per doz., £7 per gross.

CATHODE RAY TUBES : 5CP1 Electrostatic Intensifier, type C.R.T., diameter 5in. max. second anode voltage 2 kv., max. intensifier anode voltage 4 kv., medium persistence screen. Brand new in original crate or carton, 22/6 each.

AERIAL RODS : Copper plated steel. Fit into each other to make up any length aerial. Per doz. 2/- ; per gross 18/- ; per thousand £4/10/-.

TOROIDAL POTENTIOMETERS : On ceramic former, 2,400 ohms, at 50 w. Each 5/6.

STABILIVOLT TYPE VS68. Similar to STV280/40. Operating voltages 280, 210, 140, 70 v. Max. electrode current 60 mA. A further large purchase enables us to offer these at 7/6 each, or 78/- per doz. while stocks last.

UNIT OFFER. Ex-Govt. Indicator Unit Type 6A. For T/V or "W.W." oscilloscope. Containing VCR97, 4 x EF50, 3 x EB34, 10 w/w pots, 2 carbon pots, 4-pole 3-way and other switches, condensers, resistors, etc., etc. Brand-new in original transit cases. Our price £3/12/6, carriage forward.

POTENTIOMETERS : Unused ex-Govt. Carbon, 3k, 10k, 20k, 50k, 100k, 200k, 500k, 1m, each 1/6. Wirewound, 50Ω, 1k, 2k, 5k, 8k, 20k, 25k, 50k, each 2/6. 100Ω 1w. pre-set pots, wirewound, 1/6 each, 15/- per doz. Humdingers, 0-10Ω 6d. each, 5/- per doz.

HEATER TRANSFORMERS : Pri. 230 v., Sec. 6.3 v. 1.5 A., 6/9 ; Pri. 230 v., Sec. 12 v. 1 A. 7/6.

SPEAKER CABINETS : 17in. x 17in. x 6¼in. o.d., 16¼in. x 13¼in. x 5¼in. i.d., to take 10in. speaker. With carrying handle and separate cable compartment at top. Soundly constructed in wood, these are ideal for dance band use. 10/6 each, carriage and packing 2/6.

P.O. RACKS : 5ft. 6in. high by 19in. wide. Available again, but early ordering essential, as stocks are limited. 20/- each, collect or carriage forward. (Carriage is normally between 3/- and 5/-.)

PULLIN MOTORS, Type A/3R. For 24 v. D.C. 3¼in. x 2¼in. x 2in. 8/6 each.

METAL CUTTING SHEARS. A robust tool, one-inch blades, will cut up to 16 s.w.g. aluminium. Per pair, 2/- ; per doz. pairs, 21/-.

SMALL-SIZE PAPER CONDENSERS : 2μF 100 v. wkg., dimensions 1¼in. x 1¼in. x ⅝in. Ideal for cross-over networks, etc., 4/6 per doz., 45/- per gross ; £14/10/- per thousand.

MOTORISED SWITCH ASSEMBLY : Type 10FB/556. Containing 24 v. miniature motor, 2¼in. x 1¼in x 1¼in., gearing, switch contacts, etc. Ex-Govt. Motor only tested. 10/- each.

ROTARY TRANSFORMERS : With permanent magnet field. Input 11/12 v., output 480 v. 40 mA. Each 10/6.

ALL GOODS NEW AND UNUSED UNLESS OTHERWISE STATED. GOODS SHOWN AS EX-EQUIPMENT HAVE BEEN FULLY TESTED AND ARE IN GOOD WORKING ORDER. **PLEASE ADD POST OR CARRIAGE ON ALL ITEMS. KINDLY PRINT NAME AND ADDRESS.**

We maintain a very complete and comprehensive stock of valves, cathode tubes and components for radio, television and electronics. Our shop hours are 9 a.m. to 6 p.m. on Monday, Tuesday, Wednesday, Friday and Saturday, and 9 a.m. to 1 p.m. on Thursday, during which times we are always pleased to welcome callers. Post orders to Garland Bros., Chesham House, Deptford Broadway, S.E.8.

GARLAND BROS

GARLAND RADIO
CHESHAM HOUSE, DEPTFORD BROADWAY, S.E.8
TELEPHONE : TIDEWAY 4412/3

ALLEN & GOULD
5, OBELISK PARADE, LEWISHAM, S.E.13
TELEPHONE : LEE GREEN 4038

For Quality Bargains Always —Best Buy at Britain's

Communications Receiver Type R1155. No longer needs any introduction. A new revised and enlarged "Wireless World" leaflet, at 1/3, post paid, gives all relevant data. A limited number only of absolutely brand new, unused receivers available at **£9/19/6**. We also offer these receivers at **£7/19/6**. Although not new at this price, they are nevertheless in excellent condition and represent sound value. All our receivers are aerial tested before despatch. Whichever set you specify there is a carriage charge of 10/- to cover despatch in maker's transit case. Any receiver gladly demonstrated.

R1155 Power Pack/Output Stage. Enables the receiver to be operated direct from A.C. mains. Just plug in and connect low impedance speaker. (Note: speaker NOT supplied.) Only **£3/19/6**.

Receiver R2547. Contains 15 of EF50, one of VR56 (EF36), one of VR55 (EBC33), two of VR116, three of VR54 (EB34), one of VR92 (EA50), and a 45 mc/s. "Pye" Strip. Also included are 11 pot'meters, a motor with gear box, relays and numerous other small components all mounted on an extremely useful chassis. **BRAND NEW IN TRANSIT BOXES.** Only **£5/19/6**, carriage paid to your door.

45 Mc/s "Pye" Strip. A ready made vision receiver (London frequency). Uses six of EF50 and an EA50. Complete circuit data provided. Less valves, **39/6**; with all valves **62/6**. In brand new condition.

Receiver type 52. A battery operated superhet receiver covering 4.2-7.5 mc/s and 19-31 mc/s. Operates as a double superhet on the 16 metre band. Complete with nine 2 v. valves and circuit diagram. New condition. **45/-**. Carriage paid.

6 v. Vibrator Pack. Suitable for use with the 21 set. Output 150 v. at 40 m/a. fully smoothed and rectified. Circuit diagram included. Cheap at **17/6**, post paid.

Command Receiver type BC455. Frequency range 6-9 mc/s. Valve line-up: three of 12SK7, one of 12SK8, one of 12SR7, one of 12A6—all metal valves. I.F. value 1415 kc/s. In brand new condition and complete with circuit diagram. Contained in a black crackle case. Only **55/-**, post paid. A bargain.

Receiver type 160. Valve line-up: one of CV66 (grounded grid triode), one of EF50, one of VR65 (SP61), one of VR92 (EA50), small impulse motor, all in case size 8½ x 4½ x 6½in. **12/6**, post paid.

Simpson Dual-Range Ohmmeter. BRAND NEW AMERICAN INSTRUMENT. Incorporates 2½in. moving coil meter. Ranges: 0-2,000 ohms and 0-200,000 ohms. **52/6** post free.

MODULATOR UNIT TYPE 169. CONTAINS ONE OF SU4G, ONE OF EF50, THREE SMALL NEONS, ONE KLYSTRON, ONE OF CV85 (TRIGGERON), TWO LONG METAL RECTIFIERS, RESISTORS, CONDENSERS, ETC., ALL HOUSED IN A HANDSOME METAL CASE. PACKED BRAND NEW IN TRANSIT CASES. 32/6, PLUS 7/6 CARRIAGE. THIS UNIT SHOULD PROVE PARTICULARLY SUITABLE FOR THE EXPERIMENTAL LABORATORY OF INDUSTRIAL CONCERNS.

COMPONENT MART.

Blower Motor. For operation from 24 v. A.C. or D.C. but will run from mains when fitted with suitable dropper resistance. Has many uses—ventilation purposes, as a hair dryer etc. AS NEW. Only **7/6**, post paid.

Dual Crystal Standard. 100 kc/s./1,000 kc/s. As used in Class "D" Wavemeter, etc. Brand new and boxed. **23/-**, post paid.

Output Transformer. Six ratios, **7/6**, plus 6d. post.

Mains Transformers. Standard primaries. Universal mounting. 250-0-250 v. 80 m/a., 0-4-6.3 v., 4 a. and 0-5-6v. 2 a.; 250-0-250 v. 90 m/a., 0-4-6.3 v. 5 a. and 0-4-6 v. 2 a.; 30 v. 2 a. tapped 3 v. 4 v. 5 v., 6 v., 8 v., 9 v., 10 v., 12 v., 15 v., 18 v., 20 v. and 24 v. All these transformers are brand new, fully guaranteed, and priced at **12/6** each, plus 9d. post.

E.H.T. Transformer. For VCR97 or VCR517 tubes. 2000 v., 4 v., for tube heater and 4 v. tapped at 2 v. for E.H.T. rectifier. Brand new and fully guaranteed. Our price: **35/-**, plus 9d. post.

Mains Transformer. Manufacturer's surplus. Few only, so reserved for callers 300-0-300 v. 70 m/a., 6.3 v. 3½ a., 6 v. 2 a. **12/6**.

Metal Rectifiers. 12 v. 2 a. full wave bridge, **12/6**, plus 6d. post. Miniature H.T. rectifier type RM2. 120 v. 100 m/a., **4/6** each or two for **8/-**, plus 6d post one or two.

Potentiometers. Heavy duty twin wire wound pot., 10 K. and 100 K. **5/-** each, post free.

Speakers. 3in. P.M. Brand new. **11/6**, plus 9d. post. 6½in. P.M. Heavy Duty Magnet, **9/6**. This item callers only.

Coil Pack. 3 waveband, short, medium, long, complete with all trimmers, padders, switch, etc., ready for use. Employs slug tuned iron cored coils throughout. With circuit diagram. **17/6** each, plus 1/- post and packing.

Electrolytic Condensers. 8 mfd. 500 v. wkg., 700 v. surge, three for **10/-**, post paid. 16 mfd. 500 v. wkg., 600 v. surge, three for **11/6**, post paid. These condensers are tall can type single hole fixing. Minimum quantity supplied by post three.

Multiple Block Condenser. Electrolytic. 8 x 16 x 4 x 4 x 6 mfd., all for 450 v. wkg. **4/9** each, plus 9d. post or two for **10/-**, post paid. A real snip!

Block Condensers. Electrolytic. 8 mfd. 500 v. wkg., three for **9/-**, post paid.

OUR STOCK OF VALVES, C.R. TUBES, COMPONENTS AND SPECIALISED COMMUNICATION AND EXPERIMENTER'S EQUIPMENT IS HUGE AND VARIED. WE CURRENTLY OFFER MANY, MANY BARGAINS FOR THE PERSONAL CALLER. WHY NOT PAY US A VISIT?

Have you heard our new range of high fidelity amplifiers, designed for the connoisseur? Send a large S. A. E. and specify Brochure WW. Full details will be sent by return.

CHARLES BRITAIN (Radio) Ltd.
11, UPPER SAINT MARTIN'S LANE
LONDON, W.C.2. TEM 0545

3 minutes from Leicester Square Station (up Cranbourn Street)
Shop Hours: 9-6 p.m. (9-1 p.m. Thursday) Open all day Saturday

MORE OUTSTANDING OFFERS THIS MONTH

EDDYSTONE 640 COMMUNICATION RECEIVER. As brand new, £24, carr. paid.

DIRECTION FINDING RECEIVERS. Ex-U.S. Army. Type 1005A. Complete with 15 valves. 18-65 Mc/s in 2 bands. Fitted with 3 extremely expensive meters size 4½in. x 4in. reading 0-15 v. 0-50 mA, 0-75 microamps. Size 24in. x 13in. x 14in. Brand new condition. Easily modified for amateur use. Price **£12/10/-** each, plus £1 packing and carriage.

RECEIVER TYPE 25 (TR1196). See "Practical Wireless" May 1951. Easily converted to all wave superhet. 6 valves. EF36 (2), EF39 (2), EK32, EBC33. Conversion data included. Purchased by us last month from the M.O.S. 140 only. Price **39/6**, post 1/6.

TYPE 87 ROTARY POWER UNITS. Input 24 v. Output 250 v. 65 mA and 6.6 v. 2.5 a. Elaborately smoothed. Neat black metal case, size 8½ x 7 x 4½. Brand new, **10/-** each. Post 1/6.

AMPLIFIER A1271. Brand new in sealed cartons. Size 5 x 5 x 5in. Fitted VR56 DPDT Relay. 2 mfd. condenser, Potmeter, 2 transformers, neat case. Unique value. **15/-** each, post 1/6. (90 only).

CONTROL UNIT 454A. Brand new in sealed packing. Size 8½ x 6½ x 3½. Fitted with 0-1 mA meter. 4 50k pots, 1 5k pot, 1 250 k pot, 1 DP Toggle switch, 3 jewel light jacks, 1 G.P.O. type 2 pole switch, 1 Yaxley 5 pole switch. Ideal for conversion to a first class test meter. 38 only, price **30/-** each. Post 1/6.

SELECTOR DRIVE IMPULSE RELAY with ratchet mechanism. 1 notch rotation per impulse. Type No. 10D/373. Brand new in sealed cartons. 3/9, post 10d.

CONTROL UNIT TYPE 1A AM 10L/12. Size 19 x 7 x 7. Looks like a G.P.O. Telephone jack panel. Has 26 jacks, 5 fine relays, various switches, condensers, etc. Very good condition. £1 each, carr. paid. 30 only.

CONTROL UNIT 499. Size 5½ x 5 x 3in. Slow motion drive control switches and many useful parts. Brand new, **5/-** each, post 1/-.

CONTROL UNIT TYPE 410. 25k pot. 2 SPDT switches. 1 3-way switch, 1 DPST jack push switch, neat case, size 5 x 3½ x 3. Brand new, **5/-** each, post 1/-.

RF24 UNITS. Complete with 3 valves. 20-30 Mc/s. 5 spot frequencies, **21/-**, post 1/6.

TUNING UNITS CAY 47151A. 800-1,500 Kc/s, brand new with case and lid, **15/-**, less case, 12/6. Carr. 2/6.

VOLTAGE CONTROL UNIT. Type C3. Brand new in original cases. On/Off switch, Pilot light, 6 bank fuse panel, 5 mfd. 3 mfd. heavy duty mains, noise suppressor. Excellent case. Ideal for an amplifier. Outstanding value. **12/6**, post 1/6.

FREQUENCY METERS AMERICAN 906D. Brand new in transit cases. 150-225 Mc/s. Black crackle cabinet. Absorption type. Vernier drive dial. Midget telescopic antenna. Precision microammeter 0-500 indicates resonance. Power requirements 1.5 v. LT 45 v. H.T. Has phone jack, 2 toggle switches. Valve fitted type VT172. Complete with calibration chart and circuit. 3 gns., carr. 5/-.

SECTIONAL AERIAL MASTS. 10 sections, each 3 feet. Metal sleeved sections, seasoned timber. Fitted with Guy hooks. Store soiled but absolutely sound. Price **50/-**, each carr. 5/-. Few doz. only.

12-VOLT CAR RADIO. Comprises an ex-Govt. 6-valve Command receiver expertly modified to tune medium wave band. Complete with separate 5in. loudspeaker. Excellent performance (definitely not available for 6 volts), price **£5/10/-**, carr. paid.

TELEVISION PRE-AMPLIFIERS. Makes a blur into a clear picture. Really sensitive. Fitted with EF50. Very compact. Power requirements 6-3 v. L.T. and 200/250 H.T. Ready for instant use. No modifications. State for London or Birmingham. Price **15/-**, plus 1/- post and packing. A snip.

SATISFACTION UNCONDITIONALLY GUARANTEED.

H. P. RADIO SERVICES LTD.
Established 1931
55, COUNTY ROAD, LIVERPOOL, 4
Telephone: Aintree 1446

Recognised as the Most Reliable Valveholders

Sub-Miniature Valveholders

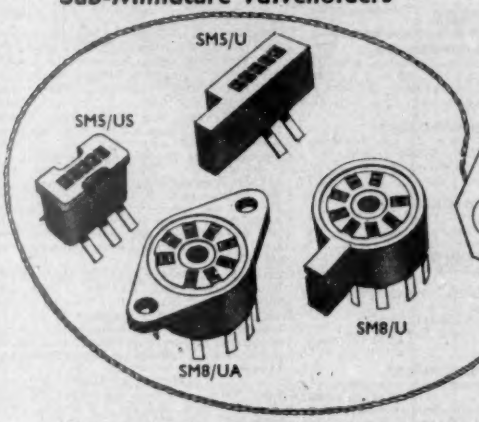

McMURDO Moulded Valveholders

All Moulded in Silica-loaded Polystyrene

B5A TYPES
SM5/U. Panel Mounting
SM5/US. Chassis Mounting

B8D TYPES
SM8/U. Panel Mounting
SM8/UA. Chassis Mounting

THE McMURDO INSTRUMENT COMPANY LTD., VICTORIA WORKS, ASHTEAD, SURREY · ASHTEAD 3401

NEW RADAR PROJECTION INDICATING EQUIPMENT MODEL V.G. TYPE CG–55 AEB.

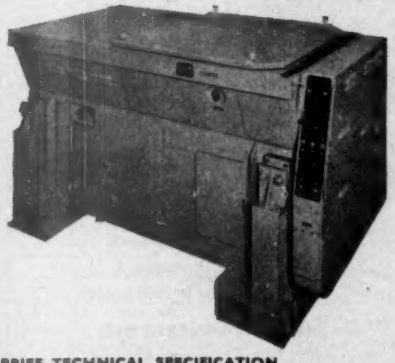

Designed and produced by the General Electric Co., U.S.A., for installation in ships, shore stations, aerodromes or research establishments. This Projection Type Plan Position Repeater performs a duty similar to the conventional P.P.I., except that the pattern is optically projected on to a large, flat horizontal surface, instead of being observed directly on a cathode ray tube face. The complete unit is approximately the size of a desk, 35in. high, with the viewing screen occupying half of the top surface, and is operated as a plotting table, on which the actual map-in-motion is portrayed. Navigational calculations are made directly on the paper viewing screen which can be replaced at will from a concealed 30-yard roll supply. The Schmidt Camera and Optical System are of latest design and exceptional quality.

The full screen may be employed to map an area of 4, 10, 20, 80, or 200 miles radius, the choice of range being made by a range selector switch. Electronically generated range marks divide the screen into concentric rings for ranging purposes. In addition, two bearing scales are projected on to the screen, one being fixed to present true or relative bearing, the other rotating to present heading. The radar pattern is therefore far more significant, because it can be observed simultaneously with the pattern of actual bearing.

The equipment is designed for operation with any radar system, of repetition rates of from 60 to 1,000 per second, and only very limited arrangements are necessary to provide the video, trigger and synchro inputs.

BRIEF TECHNICAL SPECIFICATION

Power requirements : 115 v. A.C. Single phase, or 230 v. with auxiliary transformer. Total consumption 1765 watts.
Input requirements : Trigger voltage 5-40 volts peak. Video voltage 3 volts peak max.
Ambient Temperature Limits of Operation : 0°C to + 50°C.
Screen Diameter : 23½in.
Picture Diameter : 24in.
Image Visibility : Image on Projection Screen may be observed in the presence of approx. 1 foot candle of indirect lighting.
Optical System : Highest grade lenses and components by Bausch & Lomb.

Range Accuracy : ± 1% of total designated range.
Bearing Accuracy : Within .75 degrees.
Overall Dimensions : 59in. x 34in. x 35in.
Weight unpacked : 1,000 lb.

The exceptional quality of construction, together with the numerous operational advantages are several of many features which make this advanced equipment of outstanding interest in the field of Radar Engineering.

Available for immediate delivery to U.K. and Overseas Buyers at exceptionally moderate cost. Full technical details are available on request.

LAWRENCES LIVERPOOL LTD. 61 BYROM ST., LIVERPOOL, 3 Phone CENtral 4430

RADIO SUPPLY CO.

34, HANOVER STREET, PARK LANE, LEEDS, 1. *(Telephone 22153)*

Post Terms C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/2 charged on orders under £2. Open to callers 9 a.m. to 5.30 p.m., Sats., until 1.0 p.m.

R.S.C. MAINS TRANSFORMERS

Fully Guaranteed, Interleaved, and Impregnated. Primaries 200-230-250v., 50 c/s. Screened.

DROP THROUGH TYPES WITH TOP SHROUD

260-0-260 v. 70 ma., 6.3 v. 2 a., 5 v. 2 a....	12/11
350-0-350 v. 70 ma., 6.3 v. 2 a., 5 v. 2 a. ...	14/11
350-0-350 v. 80 ma., 0-4-6.3 v. 2 a., 0-4-5 v. 2 a.	18/9
260-0-260 v. 90 ma., 6.3 v. 3 a., 5 v. 2 a.	17/6
350-0-350 v. 90 ma., 6.3 v. 3 a., 5 v. 2 a.	19/9
250-0-250 v. 100 ma., 6.3 v. 4 a., 5 v. 3 a.	21/9
250-0-250 v. 100 ma., 6.3 v. 6 a., 5 v. 3 a., for R1355 conversion	23/11
350-0-350 v. 100 ma., 6.3 v.-4 v. 4 a. C.T., 0-4.5 v. 3 a.	21/11
350-0-350 v. 120 ma., 6.3 v. 4 a., 5 v. 3 a.	25/9
350-0-350 v. 150 ma., 6.3 v. 4 a., 5 v. 3 a.	27/11

FULLY SHROUDED UPRIGHT MOUNTING

250-0-250 v. 60 ma., 6.3 v. 2 a., 5 v. 2 a., Midget type 2½-3-3in.	16/11
350-0-350 v. 70 ma., 6.3 v. 2 a., 5 v. 2 a.	16/9
250-0-250 v. 100 ma., 6.3 v. -4v.-4 a. C.T., 0-4-5 v. 3 a.	23/9
250-0-250 v. 100 ma., 6.3 v. 6 a., 5 v. 3 a., for 1355 Conversion	26/9
300-0-300 v. 100 ma., 6.3 v.-4 v. 4 a. C.T., 0-4-5 v. 3 a.	23/9
350-0-350 v. 100 ma., 6.3 v.-4 v. 4 a. C.T., 0-4-5 v. 3 a.	23/9
350-0-350 v. 120 ma., 6.3 v. 4 a., 5 v. 3 a.	27/9
350-0-350 v. 150 ma., 6.3 v. 2 a., 6.3 v. 2 a., 5 v. 3 a.	29/11
350-0-350 v. 250 ma., 6.3 v. 6 a., 4 v. 8 a., 0-2-6 v. 2 a., 4 v. 3 a., for Electronic Eng. Televisor	63/-
425-0-425 v. 200 ma., 6.3 v.-4 v. 4 a. C.T., 6.3 v.-4 v. 4 a. C.T., 0-4-5 v. 3 a., suitable Williamson Amplifier	47/6
325-0-325 v. 20 ma., 6.3 v. 0.6 a., 6.3 v. 1.5 a., for Williamson Preamplifier	16/9

FILAMENT TRANSFORMERS

All with 200-250 v. 50 c/s. primaries : 6.3 v. 2 a., 7/6 ; 0-4-6.3 v. 2 a., 7/9 ; 12 v. 1 a., 7/11 ; 6.3 v. 4 a., 14/9 ; 6.3 v. 6 a., 16/9 ; 0-2-4-5-6.3 v. 4 a., 16/9 ; 12 v. 3 a. or 24 v. 1.5 a.	16/9

CHARGER TRANSFORMERS

All with 200-230-250 v. 50 c/s. Primaries : 0-9-15 v. 1.5 a., 12/9 ; 0-9-15 v. 3 a., 15/9 ; 0-9-15 v. 6 a., 21/9 ; 0-4-9-15-24 v. 3 a., 21/9 ; 0-9-15-30 v. 3 a.	22/9

SMOOTHING CHOKES

200 ma. 5 h. 100 ohms	7/6
100 ma. 10 h. 100 ohms.	7/6
80 ma. 12 h. 350 ohms.	5/6

AUTO TRANSFORMERS

100 watts 110-200-230-250 v.	19/9

FILAMENT AUTO TRANSFORMERS

6.3 v. to 4 v. 3 a., or 4 v. to 6.3 v. 3 a. ...	7/11

ELIMINATOR TRANSFORMERS

200-250 v. 50 c/s. input, 120 v. 40 ma. output	7/9

OUTPUT TRANSFORMERS

Midget Battery, Pentode 66 : 1 for 3S4, etc.	3/6
Medium Pentode, 5,000 ohms to 3 ohms	2/9
Standard Pentode 8,000 ohms to 3 ohms	4/6
Multi ratio 40 ma., 30 : 1, 45 : 1, 60 : 1, 90 : 1 Class B Push-Pull	5/3
Push-Pull 8 watt 6V6 to 3 ohms	9/11
Push-Pull 10-12 watts 6V6 to 3 or 15 ohms	15/11
Push-Pull 10-12 watt to match 6L6, PX4, 6V6, etc., to 3-5-8 or 15 ohm speaker ...	15/11
Push-Pull 15-18 watt to match 6L6, etc., to 3 or 15 ohm speaker	21/9
Williamson type exact to author's spec.	72/-

RECEIVER CHASSIS, 16 s.w.g., Aluminium : 10-5½-2in., 3/3 ; 11-6-2½in., 3/9 ; 12-8-2½in., 4/6 ; 16-8-2½in. 5/6

AMPLIFIER CHASSIS, 16 s.w.g., Aluminium : 12-8-2½in., 6/6 ; 16-8-2½in., 7/11 ; 20-8-2½in. 10/6

MISC. ITEMS, T.V. Masks, 12in., White, 12/9. Ex Govt. Chokes, 100 ma., 10 h., 100 ohms., tropicalised 4/3 each, 45/- doz. Ex-Govt. Selenium Rects. (Ex-New Equip.), 12/24 v. 1 a. H.W. 3/6 each ; 250/500 v. 100 ma., 6/11. Ex-Govt. Receiver Units, type 71, less valves, 7/6. Vol. controls with D.P. switch, spindle, 1in., 25K, 2/9 ea., less switch 55K, 1/6. Sectional Aerial Rods, Copperised steel, 1ft. in length, ¼in. diameter, 1/11 doz., 18/- gross ; 0.1 mfd. 1,000 v. Tubs, 5/6 doz. Ceramic Trimmers 4-40 pfd. 3/9 doz.

BRAND NEW GOVT. SURPLUS VALVES (boxed). 954, 955, 956, 2/9 ; 9003, 3/3 ; VU133, 3/9 ; 7193, 1/9.

TRIMMERS AND PADDERS

4-40 pfd., 3/11 doz. ; Twin types 50-150 pfd., plus 50-150 pfd., 11/- doz. ; 10-100 pfd., plus 100-500 pfd., 10/6 doz. ; 100-600 pfd., plus 100-600 pfd., 14/- doz.

ELECTROLYTICS

4 mfd. 200 v. Tub wire ended, 7/6 doz. ; 12 mfd 50 v. Micropack, 10/6 doz. ; 8-16 mfd. 350 v. Cans, 3/3 ; 8-16 mfd. 450 v. Cans, 3/11.

FULL RANGE OF STANDARD COMPONENTS AVAILABLE AT KEEN PRICES. ALL GOODS GUARANTEED AND NEW, UNLESS OTHERWISE STATED. WE CAN QUOTE FOR ANY TYPE OF CHOKE OR TRANSFORMER, (EXCEPT E.H.T.). S.A.E. PLEASE WITH ALL ENQUIRIES. FULL STOCK LIST, 3d. SPECIAL LIST FOR TRADE, 3d.

WANTED URGENTLY, *the following equipment*

FOR RADAR OR REBECCA AIRCRAFT RADIO INSTALLATIONS

10DB/6342. Receivers 3553A or 3653A.
10VB/6084. Oscillator Units, type 221.
10LB/6011. Control Units, type 411.
10VB/6149. Amplifiers, type A.3644.
10LB/6336. Control Units, type 455A.
10LB/16012. Control Units, type 522.
10DB/8452. Rebecca Mk. II or Mk. IIB. TR. 3173.C.
10DB/6477. Rebecca TR. 3576.
10QB/6382. Indicators, type 226.
10 DB 6622. T.R. 3519 B. or Variant.
10 QB 6169. Indicator Unit 216.
10 LB 6313. Control Unit, type 552.
10—VB 6053. Amplifier Unit, type 226.
10 LB 6299. Control Unit, 426A.
10 LB 6350. Control Unit, 446A.
10 LB 6053. Control Unit, 446.

AIRCRAFT RADIO AND RADAR EQUIPMENT

Winch Trailing Aerials, type 358. This equipment is in a box approx. 2 ft. × 18in. × 1 ft. Has a Fairlead approx. 6 ft. long and includes a winch motor and Dynamode. Weight approx. 100 lb.

Radio Set Meters—made by Gruen Watch Co. Model 250. Reads 0-200 Micro. Amps.

Meters—by Simpson Electric Co., Reading—0-1 Milli. Amps.

Chokes L.F. Type 370—reference 10C/12137.

Relay Units type 21 (fairly large type).

Packer Motors (these are part of the 1143 Set).

110Q.B 29 × Indicator Unit Type B.C. 929.
110Q.B. 13 Indicator Type B.C. 1151 A.
110L.B. 24 × Control Unit Type B.C. 1145.
110L.B. 7 or 13 or N.I.V.2 Control Box. Type B.G. 115Q.A.

110D.B. 130 R.F. Unit, Type 1091.A.
110D.B. 129. Modulator Type B.C. 1142.A.
110D.B. 126 × Interrogation Responser B.C. 800.
110D.B. 32. Rectifier Type R.A. 88.A.
110D.B. 30. H.V. Reg. R.A. 90.A.
110B.B. 303. Antenna Assemblies R.C.-94A-A.
110A.B. 809. Synchromatic Unit. B.C. 1148.C.
D.110/AB/1250. American type 'No.
110K.B. 153. Power Unit P.E. 158.A.
×—S.C.R. 729. Variant Considered.
S.C.R. 720. Variant Considered.

MOD. KITS FOR ABOVE

110D.B./167. 1.
110D.B./168.
110D.B./169.
110D.B. 390. Mod. Kit No. 4.
110D.B. 391. Mod. Kit No. 3.
110D.B. 392. Mod. Kit No. 9.
110D.B. 393. Mod. Kit No. 10.
110D.B. 396. Mod. Kit No. 13.

TEST SET

110 S.B./12. L.Z./Test Sec. Signal Generator. U.S. Description. C.W.—60-A.C.A. Size 2ft. 6in. × 2ft. 6in. × 2ft.—2 cases. Size 1ft. × 1ft. × 1ft.—1 case. (Painted U.S. Green. Aerial System Coils at Cables. Tripod arrangement. Perspex Dome. Aerial System. Switch Units 110 Q.B./29 Type B.C. 929. Switch Unit for Indicator Unit.

TEST GEAR

A.1—10. S.C.R. 720.
R.F. Feeder F. Block. 110S/302. Drawing No. D.152036.
Feeder Cable. 110H/5060.
Sockets. Qty. 6 per set. 110H/3659 Co-Axial.
Test Set. 296. 10S.B./6235.
L.Z. Signal Generator. 110S/33.
Test Set 3.A.P. 110S.B./106.
Plugs. Qty. 12 per set 110H/1259.
T.56. Monitor.

PLUGS

AN 3102—28—17.P.
AN 3102—28—17—P Position 2.
AN 3102—28—794.P.
AN3102—28—17.P. Position 3.
AN 3102—28—805.P.
AN 3106—28—16P. With Split Shell.

SIGNAL GENERATORS

Ref. No. 10S/65.	Type 30.
10S/66.	Type 31.
10S/189.	Type 53.
10SB/647.	Type 56.
10SB/693.	Type 57.

TEST SETS

Type 5A. Ref. 10S/20.
Type 46. Ref. 10S/111.

STARAVIA

BLACKBUSHE AIRPORT, CAMBERLEY, Surrey

Tel. Camberley 1600

Henry's

RADIO COMPONENTS
ELECTRONIC & TELEPHONE EQUIPMENT

METAL RECTIFIERS. S.T.C. 300 volts, 75 m/a., 8/- ; S.T.C. 24 volts, 2½ amps. 17/6 ; G.E.C. 6 volts, 1 amp. 4/- ; Westinghouse 12 volts, 2 amp. 12/6 Pencil Type E.H.T. 600 v. 1 m/a., 4/7 ; Pencil Type E.H.T. 1,000 v. 1 m/a. 6/- ; Pencil Type E.H.T., 2,400 v. 3 m/a , 18/- ; Pencil Type J50, 500 v., 2 m/a., 7/6.

5M/A METER RECT., 5/- ; W.6 and WX6, 1/6.

5 CPI. C.R. TUBES. Brand new and boxed, 25/-. Carr. paid.

FILAMENT TRANSFORMERS. All inputs 200/50 A.C. 6.3 v. 1.5 amp., 7/6 ; 6.3 v. 2½ amp., 10/- ; 6 v. or 12 v. 3A., 15/- ; 6.3 v. 12A. 37/6.

R.3515 I.F. STRIP. A complete I.F. Unit, comprising 6 SP61 I.F Stages, tuned to 13.5 Mc/s., 1 EA50 diode detector, and 1 EF35 or EF39 output or video stage. A few modifications only are required to adapt this unit, which will give pictures of extremely good quality. Price, complete with valves, and foolproof modification instructions, is 45/-, plus 5/- carriage and packing. Limited quantity only.

R3547 RECEIVERS. Absolutely brand new, in sealed manufacturers' packing cases. Incorporating 15 valves type EF50, 2 of SP61, EF36, EBC33, 3 of EB34. Complete 45 mc/s. I.F. Strip, motor dial and drive, pots, etc., etc. £6 only, plus 10/- packing and carriage. Whilst they last !

EX-R.A.F. INDICATOR UNIT TYPE 62. Containing VCR 97 CRT with mu-metal screen ; Xtal Unit and valves 16/VR65 (SP61), 2/VR54 (EB34), 2/VR92 (EA50), etc., etc., two deck chassis in metal case. 18 x 18½ x 11½in. New condition. 67/6 each. Plus 7/6 packing.

INDICATOR TYPE 6. These units are brand new, in excellent condition, and are all fitted with a VCR97 CRT, the tube which many constructors have put to T.V. use. Valves include 4/VR9 (EF50), 3/VR54 (EB34), plus a host of potentiometers and H.V. condensers, etc. The complete unit is enclosed in a metal box 18 x 8½ x 7½in. **PRICE ONLY £3/19/6 POST PAID.** Please include 10/- for transit case to ensure safe transit of unit. Refunded on return of case.

RECEIVER TYPE 21. The receiver portion of the W/S 21 operating from 4.2-7.5 mc/s. Double superhet from 18-30 mc/s. Incorporating B.F.O. and crash limiter. Valve line-up 7-ARP12 (VP23) and 2-AR8 (HL23DD). Absolutely brand new, complete with circuit. Only 45/- complete. Vibrator Power Unit for above, brand new, 17/6 only.

NO. 38 "WALKIE TALKIE" TRANS-RECEIVERS. Complete with Throat Mike, 'Phones, Aerial Rods, Freq. Range : 7.4 to 9 mc/s. Brand new and guaranteed, £4/19/6. Carr. 2/6.

RECEIVER R. 1355 as specified for "Inexpensive Television." Complete with 8 valves VR65, and 1 ea. 5U4G, VU120, VR92, and a copy of "Inexpensive T.V." ONLY 55/- (carriage, etc., 7/6).

FREQUENCY CONTROL CRYSTALS. By American G.E Co. Octal base fixing. Following frequencies only : 2,500 kc/s., 6,200 kc/s., 8,000 kc/s. 7/6 each. Also FT243 ½in. pin spacing, 5765KC/7975, 10/- each. 8000/8425KC. 12/6. New and unused.
VR91 (EF50) Brand New Red Sylvanian 10/-. Original boxes. British types boxed, 7/6. Unboxed 5/-.

MIDGET .0005 mfd. TWO GANG TUNING CONDENSERS. Size only 2½in. x 1½in. x 1½in. Capacity guaranteed, standard length ¼in. spindle complete with mounting bracket, less trimmers, 6/6 or, complete with "built-in" trimmers, 7/6 each plus 6d. post.

MAINS TRANSFORMERS. 250-0-250, 90 m/a., 6.3 v. 3 a., 5 v. 2 a., half shrouded, drop through type Electrostatic screen. Price 20/- only, plus 9d. post. Limited quantity.

I.F. TRANSFORMERS. Manufacturers' surplus. Iron-cored. 465 kc/s. Size 4in. x 1½in. x 1½in. Per pair 8/6 whilst they last. **TYPE 25 R.F. UNIT,** brand new, converted from new R.F.24. 19/6. (Carriage and packing 1/6).

R.F. UNIT TYPE 26. For 26-30 mc/s. Preset, switched tuning, incorporating 3 valves SP61. Brand new. ONLY 16/6. This unit can now also be supplied modified to cover B.B.C. 26 frequency (for Midlands T.V.), brand new, at 25/-.

Send stamp for current Component List—
Probably the most comprehensive in the trade

5, HARROW ROAD, LONDON, W.2

PADdington 1008/9 and 0401

£7-19-6

for a first-class **COMMUNICATIONS RECEIVER.** This is the famous ex-R.A.F. type R.1155, which is justly known as being a really tip-top set. Covers 5 wave ranges, 18.5-7.5 mcs., 7.5-3.0 mcs, 1,500-600 kcs., 500-200 kcs., 200-75 kcs., and is easily and simply adapted for normal mains use, full details being supplied. These receivers have had some use, but are in very good condition, and are all aerial tested and guaranteed in working order before despatch. Please remit 10/- extra for packing and carriage on post orders.

INDICATOR UNIT, TYPE 6. The very popular indicator unit which is recommended for so many uses, and in particular for conversion to the "Wireless World General Purpose Oscilloscope." Contains a 6in. C.R. Tube type VCR 97, 4 valves EF50, and 3 of EB34. BRAND NEW IN MAKERS CRATES. ONLY 79/6 (carriage 7/6). Constructional data as above supplied free with each unit, or available 9d. The following components required for the conversion are also available, EHT TRANSFORMER for VCR 97 32/6 (postage 1/6), 4 v. EHT RECTIFIER with ceramic base 8/6 (post 9d.) 20n 80 ma. CHOKES 6/6 (post 9d.)

BATTERY SUPERSEDER. A "must have" for everyone dependent on HT Batteries. Operates from a 2 volt accumulator, and delivers 67 volts at 4.7 ma., 130 volts at 13-25 ma., and 1.4 volts LT. This is a first-class American made vibrator unit, and is easily modified for use with any set, fully illustrated details being supplied. For the few coppers cost of charging an accumulator constant HT is derived, and the initial outlay is soon regained in saving on batteries. ONLY 60/- (postage 1/6), or with two 2 volt accumulators in metal case 90/- (carriage etc 5/-).

"PYE" 45 MCS. I.F. STRIP. Ready made for the London vision channel, this 5 stage strip contains 6 valves EF50 and 1 EA50 Circuits and simple mod data supplied. BRAND NEW. ONLY 60/- (postage etc. 2/6). Less valves 37/6 (plus postage 2/6).

10 VALVE 1½ METRE SUPERHET ZC.8931. The ideal receiver for long distance TV results. The valve line-up is 6 of VR65, 2 of VR92, and 1 each VR136 and VR137, and the 12 mcs 6 stage I.F. Strip gives tremendous amplification with ample bandwidth of 4 mcs. Easily modified, full details being supplied. BRAND NEW IN MAKERS CARTONS. ONLY 39/6 (carriage 5/-).

R.1355 RECEIVER. The unit specified for "Inexpensive Television." Complete with 8 valves VR65, and 1 each 5U4G, VU120, VR92, and a copy of the book. BRAND NEW. ONLY 55/- (carriage etc. 7/6).

194 I.F. STRIP. Another strip easily modified for TV Contains 6 valves VR65, and 1 each VR53 and VR92. This 6 stage strip measures only 18in. x 5in. x 5in. and is particularly recommended for constructors who have built televisors but are having trouble in the vision or sound receivers. Full modification data supplied BRAND NEW. ONLY 45/- (postage etc. 2/6).

INDICATOR UNIT, TYPE 184A. Contains two C.R. Tubes, a 6in. VCR 517 and a 3in. VCR 139, 5 valves EF50, 3 of EB34, 3 of SP61, and 5 diodes EA50. ONLY 75/-. (Carriage etc. 12/6).

OSMOR MIDGET COIL PACK TYPE H.O. Covers S.M. and L. waves, and is complete with full circuits for 465 kcs. superhet unit. Limited quantity only available at pre-budget P.T rates ONLY 40/4 (postage 8d.).

3in. VITAVOX P.M. SPEAKER. A really beautiful job, incorporating an aluminium cone which gives better response and volume. IN SEALED MAKERS CARTONS. ONLY 11/9 (postage 9d.).

Cash with order please, and print name and address clearly. Amounts given for carriage refer to inland only.

U.E.I. CORPORATION

Radio Corner, 138 Gray's Inn Road, London, W.C.1. *Phone :* TERMINUS 7937.

(Open until 1 p.m. Saturdays We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross)

OUTSTANDING OFFERS FOR EXPORT ONLY

U.S.A. RADIO EQUIPMENT

RCA TRANSMITTERS Type ET 4336-H
Westinghouse AIRCRAFT TRANSMITTERS, Navy Model G.O.9
TRANSMITTERS/RECEIVERS SCR-536
TEST EQUIPMENT iE-46 (I.F.F. Test)

U.S.A. RADAR EQUIPMENT

Mk. 26 (Models 3 and 4) — APS-3, 4 and 6 units and spares
BM-Units — AN/UPM-1B
BN-Units — SO-13
VF-Units

SPARES (RADIO & RADAR — U.S.A.)

(ET.4336, SCR-522, ATC, BRC, RU, Aircraft Radio Altimeter Equip. AN/APN, BC-640, BC 453/4/5 APX, TPX, ABK, BM, BN, SO-1, 2, 13, BL, SK, SL, SA-2, etc. Full range of spares for A.C.U. of SO-Series of Naval Radar Equipment:
Gisholt Balancing Metering Units
Filter Room—Model AN/TTQ-1

COMPONENTS

Large quantity of all types of U.S.A. and British Condensers—Transformers—Chokes—Coils—Potentiometers—Resistors—Relays—Crystals—Dynamotors, etc.

POWER UNITS PE-99 (7½ KVA) PE-117 and PE-120 (50 of each)

Individual Test Certificates and A.I.D. Certificates can be supplied upon request

ENQUIRIES TO

BRITISH SAROZAL LTD.

(Export Branch)

1, BRISTOL HOUSE, SOUTHAMPTON ROW, LONDON, W.C.1
Telephone : HOLborn 6763/4/5 *Cables : Sarozal, London*

OVERSEAS BUYERS ARE CORDIALLY INVITED TO VISIT OUR WAREHOUSES, SHOWROOMS AND LABORATORY

G2AK *This Month's Bargains* G2AK

C.R. TUBES Type 5CP1 brand new in cartons 17/6 each, plus 1/6 postage.

ARMD SPARE CRYSTALS. 455 Kc/s. 15/- each.

RECEIVERS. Type 18. Cover 6-9 Mc/s, and are for battery operation. New condition. Only 17/6 each. Phones to suit 4/6.

MOVING COIL HEADPHONES with moving coil microphone. Price 6/-. Post 1/-. Transformer to match 2/-. High resistance headphones, 4,000 ohms, 8/6 per pair. Post 1/-.

CABLE. 10ft. length flexible T.R.S. 3-core. Fitted with 3 position switch and plug. 1/6 post free.

TWIN RIBBON FEEDER. Heavy duty 300 ohm, 5d. per yd. Standard K25 300 ohm ribbon, 9d. per yd. Co-ax. cable, ¼in. dia. 70 ohm, 8d. per yd. ½in. dia., 1/- per yd. 7ft. length ½in. dia. Co-ax. with Pye plug one end, 1/6, post free. All other Co-ax., and feeder, plus 1/6 post any length.

POTENTIOMETERS. 5 watt wire-wound 20 k., 25 k., 2/-. 500 ohm and 2,000 ohm 50 watt wire-wound on heavy Ceramic former, 3/6 each. Carbon Type Potentiometers, 50 k., 100 k., 1 meg., 2 meg., 1/6.

BRAND NEW 807 VALVES. 10/- each or 4 for 35/-.

AERIAL INSULATORS. Pyrex 7in. ribbed glass, 3/6 per pair, plus 1/- post.

STATION LOG BOOKS. 200 pages printed one side only. Size 8½in. x 11in. First class paper and bound with heavy cover. Price 17/6.

Carriage paid on all orders over £1 except where stated. Please include small amount for orders under £1.

Please print your name and address.

CHAS. H. YOUNG, G2AK

All Callers to **110 DALE END, BIRMINGHAM**
Phone : CENTRAL 1635
Mail Orders to **102 HOLLOWAY HEAD, BIRMINGHAM**
Phone : MIDLAND 3254

ALEC Davis SUPPLIES Ltd.

Dept. W.W.

18 TOTTENHAM COURT ROAD, LONDON, W.1
Tel.: MUSeum 2453/4539

Shop hours : Monday - Friday 9—5.30 *Saturday 9—1*
FULL MAIL ORDER FACILITIES. *Please add postage*

RELAYS (EX-MINISTRY)

D.C. COIL RESISTANCE

3,000 TYPES : 1.9Ω to 80,000Ω
600 TYPES : 0.4Ω to 9,200Ω



600 or 3,000 TYPE

ALSO LARGE STOCKS OF DOUBLE & TRIPLE-WOUND AND SLUGGED COILS.

CONTACTS

3,000 TYPES : up to 8 sets.
600 TYPES : up to 4 sets.

3,000 TYPES : Make (M), Break (B), in Twin-silver, Twin-platinum, Dome-silver (2 amp.), Tungsten (5 amp.), and Flat-silver (8 amp.). Change-Over (C), in all but Tungsten : Make-Before-Break (K), in Twin-silver and Twin-platinum.

600 TYPES : (M), (B) and (C), in Twin-silver and Twin-platinum.



SIEMENS H/S TYPE

SPECIAL
3,000 type Relays with 80,000Ω coils operating on approx. 600 μA. with up to four sets of contacts.

PRATTS RADIO

1070 Harrow Road, London, N.W.10
(Nr. SCRUBBS LANE) Tel. LADbroke 1734

MODEL AG10E £9/18/-

AMPLIFIERS. College general purpose units. **MODEL AG10E,** 4 valve 10 watts. Neg. feedback, **£9/15/-. MODEL AG12E,** 6 valve, 18½ watts P/P output. Feedback over 3 stages, **£14/14/-. MODEL AG25E,** 32 watts P/P output. Feedback over 3 stages, **£17/17/-. MODEL U10E,** for DC/AC mains, 6 valve 10 watt P/P output. Feedback over 3 stages, **£12/18/-.** All are complete with name and chrome handles. They have a separate microphone stage. Separate inputs for mike and gram., allowing individual mixing etc. Outputs match 2, 8 or 15 ohm speakers. Max. input volts required for full stated output average Mike .003, Gram. .3 v. H.P. terms available. **MODEL AG6C,** 5 valve P/P 6-10 watt unit for records, radio etc. Feedback over 3 stages. Output to 2, 8, 15 ohms. **£9/18/6. MODEL AG4C,** 3 valve record/radio amplifier. 4 watts to 3 ohms. **£5/5/-.** Ditto U4C for DC/AC mains, **£5/5/-.** Stamp for list. Full range of accessories available, including: Rothermel Crystal Mikes, **105/-;** Goodmans 12in. P.M. speaker, **£6/15/-;** Collaro A.C. Record Players, rim drive, magnetic model, **£6/9/-,** Crystal, **£6/15/-.** Jack plugs 1/6 each extra.
Nearest Station: Kensal Green.

RADIO DEALERS AND SERVICE ENGINEERS

WE HAVE WHAT YOU WANT
to service your Radio & Television Receivers. Stock Lines all Types of Condensers—Mains Transformers—Chokes—Coils—Potentiometers—Resistors—Loud Speakers, and many other attractive items at low prices.

SEND FOR OUR MONTHLY BULLETIN
which includes special bargain lines.

— TRADE ONLY SUPPLIED —

HOME and OVERSEAS

V. E. S. WHOLESALE SERVICES LTD.

11, GUNNERSBURY LANE, WEST ACTON, W.3
'Phone : ACOrn 5027

Wireless World Classified Advertisements

Rate 7/- for 2 lines or less and 3/6 for every additional line of not thereof, average lines 6 words. Box Numbers 2 words plus 1/-. (Address replies: Box 0000 c/o "Wireless World," Dorset House, Stamford St., London, S.E.1.). Trade discount details available on application. Press Day: July 1951 issue, Thursday, May 31st. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components which may be offered for sale through our columns carry no manufacturers' guarantee. Many of these components will have been designed for special purposes making them unsuitable for civilian use, or may have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such components purchased.

NEW RECEIVERS AND AMPLIFIERS

BERNARD'S.—New address (see below).

BERNARD'S, manufacturers of television, radio and amplifying equipment, can now offer good deliveries of hand-built equipment; let us quote you and save yourself £££££s by buying direct from actual manufacturers; 12 months' written guarantee; we supply complete television receivers; time-bases, vision strips, amplifiers 5-1,000 watts, radio receivers; quotations by return post.
BERNARD'S, 12, St. Stephens House, Westminster Bridge, London, S.W.1. [0097

UNIVERSAL ELECTRONIC PRODUCTS, 34, Marylebone High St., London, W.1. Welbeck 4058.
SPECIALISTS in the design and manufacture of high fidelity reproducing equipment from 5-100 watts for domestic or industrial purposes. Our new twin channel amplifier (type U.E.57), with independent bass and treble outputs, provides the most satisfying standard of reproduction we have yet experienced. It is now being demonstrated in our showrooms daily (we close Thursday 1 p.m., Saturday 4.30 p.m.), and we invite those who seek perfection from recorded music to hear this superb instrument. We also offer tuning units or complete chassis designed and constructed to individual requirements.

12-watt high quality amplifiers, bass and treble boost; £12/10; lists.—Broadcast & Acoustic Equipment Co., Ltd., Tombland, Norwich. [0065

MIDLAND RADIO COIL PRODUCTS offer a service for the production of high quality amplifiers and radio equipment to specification; list of standard products is available; suppliers of audio and radio equipment to the Northamptonshire Education Authority.—Enquiries to 28 Winstanly Rd., Wellingborough. [6336

C.J.R. ELECTRICAL & ELECTRONIC DEVELOPMENT, Ltd., Hubert St., Birmingham, 6 (Aston Cross 2440), the Midlands specialist manufacturers of high fidelity sound reproduction equipment, offer the world-famous Williamson amplifier and associated accessories including tone control stages, loudspeaker crossover units, distortionless contrast expanders and radio feeders; send for details and prices. [0105

CONNOISSEUR'S receiver, acclaimed by its users as the finest receiver for the enthusiast and the only one with the following facilities: 9-1,500-metre, world-wide results on highly sensitive 10-valve receiver, comparable with any good communication set, or by change of switch, maximum fidelity reception of local stations on non-superhet receiver with high quality 2-PX4 push-pull amplifier incorporating all refinements, bass and treble tone control (boost to cut), whistle filter and gram input, etc.; basis rebuilt R1155; write for details or call for demonstration. FEEDER units as above, for use with external high-quality amplifiers; R1155 specialists, receivers repaired and re-aligned, also modified as above, or to your requirements; R1155 circuit and values 2/- post free.—R.T.E., Ltd., 25, Gladstone Rd., Wimbledon, S.W.19. Tel. Lib. 3303.

TELRAD ELECTRONICS, 70, Church Rd., Upper Norwood, London, S.E.19.—Designers and manufacturers of Telrad quality amplifiers; established as the most outstanding value in high-quality amplifiers, thanks to faithful reproduction at unrivalled price, these unique amplifiers are the first choice of the enthusiast; built to satisfy the discriminating ear; bass and treble independent controls, providing widest possible variation to suit all recordings and varying acoustic properties of one room with another; full details on request.—Write, call or 'phone Livingstone 4979. [0019

£13/18.—Yes, this is the surprisingly low price of our latest 5-valve all-wave a.c. Superhet R/O chassis; these chassis have been acclaimed by many of our customers as being the best value they invested in; the chassis is fully wired, aligned and aerial tested, installation is simplicity itself; large fully illuminated glass dial in attractive colours; 3½w output from a specially matched speaker; price with 10in P.M. speaker £13/18, with 8in P.M. £13/8; send 2½d stamp for illustrated leaflets of this grand performer; trade enquiries invited.—Bayly Bros., 46, Pavilion Drive, Leigh-on-Sea, Essex. [6905

Partridge News

PRECISION
TRANSFORMERS
(5VA to 100kVA)

100 TYPES available from Stock

This extended "in stock" range also includes all components for the

WILLIAMSON AMPLIFIER

The transformer illustrated provides the widest possible audio range, the lowest possible distortion and an output of 20 watts . . . it is built to the strict demands of the designer of this famous amplifier—it embodies the finest technical skill and craftsmanship available

De Luxe Model
PRICE £6 - 4 - 0
Or Potted as shown
PRICE £6 - 12 - 0

Technical data available on request.

PARTRIDGE
TRANSFORMERS LTD
ROEBUCK ROAD, KINGSTON BY-PASS
TOLWORTH SURREY
Telephone: ELMbridge 6737-8

RECEIVERS, AMPLIFIERS—SURPLUS AND SECONDHAND

R1155, perfect condition, not modified; £8/7/6, including carriage and ins.—Box 1330. [6890

V53B communications receiver by Radiovision of Leicester (unused); price £10.—Box 1284. [6012

SALE, Marconi CR100/4, perfect condition.—Offers to Cave, Vanzeua, Wyndham Rd., Taunton. [6851

CHARLES K51 amplifier, £15; R.C. tuner, £14, used few hours only.—Knightbridge, Emkay, Maldon, Essex. [6832

QUALITY equipment disposal: Receivers, amplifiers, speakers, etc.—Rickards, 3, Chestnut Ave., Tipton. [6862

ARMSTRONG EXP119 chassis, 10v, 9 wavebands, 10in speaker; offers.—Stiles, 20, Richmond Terrace, Bristol, 8. [6814

HAYNES qual. recvr., with Epoch 12in enersp., £35; buyer collects; S.E. 036, 56/-.—51, Bemsted Rd., Walthamstow, E.17. [6904

HALLICRAFTERS Skyrider Marine 8-valve a.c./d.c. receiver, B.F.O., 4 bands; £16.—502, Clive Court, Maida Vale, W.9. Cun. 3461. [6864

MASSIVE 50 watt high quality amplifier, 4KT66, in parallel push-pull, mike, gram and PE cell input, in steel case 18in×18in×17in; £35.—Box 1411. [6938

HRO Rx's and coils in stock, also AR88, BC348R, CR100, etc.—Requirements please to R.T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0054

EDDYSTONE 670 marine receiver, new Sept. '49, perfect order, spare set valves, mains filter, double aerial and feeder; £40.—Mawby, Witney Rd., Eynsham, Oxford. [6912

SCOTT Philharmonic 30v all-wave chassis, amplifier and 15in speaker, little used, £110; Warwick cabinet for above, £25.—A.C. Radio, 44, Widmore Rd., Bromley, Kent. [6820

EDDYSTONE 750 receiver, with 688 loudspeaker, 699 "S" meter, 1 pair Brown's phones, used only two months; nearest offer to £50.—Hartley, 245, Keighley Rd., Colne, Lancs. [6928

CLEARANCE for rearmament orders, slightly substandard amplifiers, tuners, etc., at substantially reduced prices; s.a.e. list.—Felicity Amplifiers, 26a, Wadham Rd., S.W.15. Vandyke 4653. [6918

WILLIAMSON amplifier with preamplifier and tone compensation and filter units, Garrard motor 78/33⅓ with Acos G.P.20 pickup, 2 heads, Barker speaker, 12in model 14as, Console cabinet; £60.—Box 1388. [6916

ARMSTRONG chassis, exp. 12S/1, 14 valves, 2 i.f. ouput, 6v6 parallel push-pull, 2 units, condition as new, modified for twin high impedence pick-ups, with individual faders, using ECC32; £30 or nearest offer secures.—Box 1332. [6896

WILLIAMSON amplifier, with pre-amp bass, middle, treble lift, Colaro auto-change (mixed), Sifted head, Goodmans Axiom speaker in bass reflex cabinet, large console cabinet, sacrifice at £40.—Vennard, Coombe Ridge, Brimscombe, Stroud, Glos. [6821

RADIOGRAM, Pentron Astra-Sonic portable high-fidelity 7-valve wire-recorder/radio/record-player/amplifier, complete with mic. and six one-hour reels Hi-Fidelity wire, £85; R103 Canadian 7-valve 6v vibrator set, complete with box spare valves, £15 or near offer.—Box 1329. [6887

WILLIAMSON amplifier, paper smoothing condensers, and Williamson tone control unit, engraved oxidised copper panel, £15; 2 R.F. and I.I. Det. 6-station pre-tuned receiver, recs. re-aligning, £4; power supply, £2/10; Rola G.12 energised 15Ω speaker, £2/10; £25 the lot; also Baker Selhurst P.M. 15Ω speaker in 18in cube veneered walnut cabinet, £5.—Widdowson, 37, Hawksworth Lane, Guiseley, near Leeds. [6878

LOUDSPEAKERS—SURPLUS AND SECONDHAND

VITAVOX Bitone, 20watts, as new; nearest £40; Surrey.—Box 1286. [6902

FOLDED bass corner horn (Klipsch) fitted Telefunken 12in high flux unit; £19.—Tel. Prospect 4563. [6889

ROGERS reflector type L.S. corner cabinet, in walnut, £17; Axiom 22, as new, £10; Decca "C" P.U., £5/7/6; Varleton Hi-Fi O.P.T., £5; Leak P.U., L.P., as new, £10.—Seymour, 19, Parkhurst Court, Holloway, N.7. [6867

TEST EQUIPMENT—SURPLUS AND SECONDHAND

AVO wide range signal generator, new; £24.—Bennett, 8, Kingsmead Ave., Romford. [6892

FOR sale, Avo valve tester, £12; Advance Signal generator, £15; both as new.—Want, 45, Woodside Ave., N.10. [6837

FREQUENCY meter, BCR221, with mains power supply, perfect order; £15 complete.—Orama Radio, Kinnel St., Rhyl, Flints. [6825

TEST EQUIPMENT—SURPLUS AND SECONDHAND

MOVING coil D.C. meters, 0-3,500, 3½in dial flush, 35/-; also 2in P.S.D., 1.5ma, scaled 0-5, 6/-.—Passingham, 16, Greenhead Lane, Keighley. [0092

COMBINED multi-range and valve tester, maker Slade & Co., tests every component; full instructions; offers; perfect condition.—Box 1386. [6902

B.P.I. six-generator (mains), £8; B.P.I. Universal bridge, £3; Everett-Edgcumbe service valve tester, £14; all perfect condition; £23 the lot, or offers.—W. D. M., 10, Harley Ave., Bebington, Cheshire. [6856

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters multi-range meters in stock; your enquiries are invited.—Requirements to R.T. & I. Service, 254 Grove Green Rd., London, E.11. Ley. 4986.

NEW DYNAMOS, MOTORS, ETC.

BATTERY chargers, 4 models, 2-6-12v, 1-2-4 amp D.C.; any mains voltage; also larger types special transformers, chokes, test gear, interior car heaters, etc.—The Banner Electric Co., Ltd., Hoddesdon, Herts. [0122

ALL types of rotating electrical machinery up to 20kva available, including rotary converters, rotary transformers, motors, petrol and diesel-engined generating plants, alternators and d.c. generators. We are also in a position to quote for power transformers; as actual manufacturers we will be glad to quote for any quantity for home or export.

DIESEL Electric generating plants, 5kva, 230v with push-button remote control, starting equipment ready for use, £205.

ROTARY transformers, input 20v d.c., outputs 6.5v d.c. and 300v d.c., permanent magnet field, 20/-; ditto, input 28v d.c. and 1,200v 70ma d.c. output; energised field, 35/-; ditto, input 12v d.c., output 500v, 50ma d.c., energised fields, 35/-.

CHAS. F. WARD, Lordscroft Works, Haverhill, Suffolk. Tel. 253. [0089

DYNAMOS, MOTORS, ETC.—SURPLUS AND SECONDHAND

"VALRADIO," D.C./A.C. 230/200 converter; new condition; must sell; what offers?—Ponsford, 39, Acacia Ave., Eastcote, Middlesex. [6868

CHARGING and lighting plants, a.c. and d.c., please note items 1 and 2 are not surplus, but current products of well-known British manufacturers.

DIESEL alternator, 230/1/50, 3 kva, belt driven, by Petters, very latest type diesel engine A.V.1, self-energised, automatic voltage control, handle, starter, press button and remote control, 1 press-button remote control start and stop supplied, extra control units £1, complete with H. duty Exide starter battery, complete with charger for starter, battery full load 4½-5 hrs. on 1 gall. of fuel; engine covered by Petters inspection service, tested on full load before dispatch, delivered ready for use; £210.

ALTERNATOR, 230/1/50, 3 and 6 kva only, 1,500 rpm, clock or anti-clock, self energised, with voltage control rolling, two-bearing set complete with 24v charging and lighting circuit, suitable engine, Petters diesel A.V.1 for 3 kva, 8v batts., 72 amp/hr., 65/-; 85 amp/hr., 70/-; 120-140 amp/hr., 100/-; set for £19 100/- delivered.

PLEASE do not ask for catalogues, state exact requirements. See displayed advert., page 88, for S.T.C. selenium rectifiers; terms o.w.o. pro-forma invoice, c.o.d. (post goods only).—PEARCE, 66, Ot. Percy St., W.C.1 (near Angel). [0014

D.C.-A.C. converter by Electro Dynamic, input 200/250 D.C. 1.3amps. output, 110 A.C. 50 cycles, 2.27amps., suitable for projector, as new, offers.—Brixham Electric Service, 50a, Fore St., Brixham, Devon. [6852

ROTARY converter, 2, both smoothed for radio, 200 volt d.c. input, 220 volt a.c. output; 1 100 watt, £7; 235 watt, practically new, £20.—Apply W. J. Simms, Sons & Cooke, Ltd., Haydn Rd., Sherwood, Nottingham. Tel. 66264, ext. 6. [6837

TRANSMITTING EQUIPMENT

TR1143A sets in good condition, quantity available for export only, cheap.—B.E.R., 69, Church Rd., Moseley, Birmingham. [6792

NEW GRAMOPHONE AND SOUND EQUIPMENT

FRITH RADIOCRAFT, Ltd., offer from stock:—

ACOS GP-20 pick-ups with standard head, £3/11/6; extra microgroove heads GP-18LP, £2/3/4.

MARCONI type 14 pick-ups, Hi-Fi lightweight for miniature needles, complete with matching transformer, £6/6/4; complete with matching fossmer, £1/15/10.

B.S.R. MU-10 gram motors, 2-speed, turnover pulley for 33 or 78 rpm, £3/15.

B.S.R. MU-24 de luxe version of above, fitted with instant speed change, 33-45-78 rpm, £7/3/4.

COLLARO AC-564 radiogram units complete with magnetic pick-up, £6/10/5.

ALL above prices include purchase tax; post free in United Kingdom.

EXPORT orders tax free; price list by air mail on request.

FRITH RADIOCRAFT, Ltd., 69-71, Churchgate, Leicester. 'Phone 58827. [0024

MAGNETIC tape recorders.—Make your own. Simply and easily; Cleartone recorders (10 watt) specially designed for amateurs, crystal clear, silent running, superb performance comparable professional machines; simplified instructions, blueprints, 5/9 post free; kits supplied.—Earnshaw Hare (member B.S.R.A.), Lydford, Devon. Tel. 206. [6596

THE IDEA BEHIND THE WORDS HARTLEY-TURNER

3. Attaining the near ideal

We have described the policy which begat the Hartley-Turner 215 speaker. The question arises "Have we produced something which really does appeal to the high-fidelity listener?"

All over America there are Hartley-Turner clubs formed of enthusiasts for our products. Here is a letter from one in Venezuela.

"It is thought you would like our report on the 215 speaker, three of which were received in perfect condition about two weeks ago. All were impressed by both the packaging and the fine workmanship. The speaker is a beautiful appearing job mechanically, the craftsmanship evident to even the lay eye.

"We set it up in line against my s600 unit and three other prominent American speakers, one a Monitoring system, one in a reflex enclosure and one in an acoustical labyrinth. About that time my wife was ready to throw all of us out of the house.

"But there have been a number of evenings of listening—most of us skeptics thought it would all be over in one hearing—and the average reaction is one of being not quite able to believe it. But, more seriously, I think the group opinion boils down to this: It is a wonderful speaker. As you have said, it takes more 'drive' than most. It is not as good as my own $600 unit (maybe we are over-conditioned to its sound, however). It is better than the Monitoring system which lacks bass—sharp cut-off at 60 cycles. Nothing else tested is in the same class.

"There have been other tests. We ran it as a bass woofer, feeding it from the low half of a 400 cycle crossover network, as a tweeter above 1,000 cycles, and as a mid-range unit, 400-1,000 cycles. In each position we were impressed, but mostly in its high and low response. The answer to your low response is of course the available 1in. movement without distortion. The highs—well, your cone is the first direct radiator I have encountered that approaches the crispness of a diaphragm type speaker. Most of these are too crisp: I like the 215 there very much.

"As things stand now, and this is but a progress report, I still prefer my own multiple system, but I never expected to find, in one single unit, the musical quality and range of the 215. As economics do not allow $600 for every room the 215 will find one or several useful spots in my home as well as in some of the others' homes. And it will certainly be my recommendation to all of those who cannot afford a six-hundred-dollar unit."

We have had other letters by the dozen which say that no American unit under $200 can compare with the 215 at $48. (And one or two who like it better than our $600 friendly competitor). We cannot reasonably expect to produce a better speaker for $48 than someone else can for $600, but we seem to get pretty near.

To you in Britain, the price is £10.10.0 (plus 3s. for postage, packing and insurance) and its users say it is better than any other British speaker at any price level.

H. A. HARTLEY Co. Ltd.

152, HAMMERSMITH ROAD, LONDON, W.6

RIV. 7367

NEW GRAMOPHONE AND SOUND EQUIPMENT

WILLIAMSON amplifier, tuner coils to spec., LW or MW, 7/6 per pair, or 2/- your station choice.

BATTLESHIP series, transformers, guaranteed and made to last, capable heavy overloads, GPO type construction and specification, examples, 425v CT @ 250ma, 2 LT @ 6a, 80/- (weight 14lb); 130v @ 15ma 6.3v @ 1a (no CT), 22/6; list available.

BEL SOUND PRODUCTS Co., Marlborough Yard, London, N.19. Arc. 5078. [0187

DECCA pick-ups for l.p. and standard records, two interchangeable Aeos cartridges with sapphire styli; 84/6.

MARCONI type 14 pick-up and transformer; 45/4.

MOVING coil pick-up, well-known make, with high output transformer, few only remain at 35/6.

3-SPEED Decca motor, heavy 10in turntable, 33-45-78 rpm; £7/8/4.

QUALITY MART, 110, Villiers Road, Watford, Herts. [6981

TAPE recorder motors, 250v a.c., powerful, quiet, brand new, 15/11; post, etc., 1/-.—K. W. Logan Westalley, Hitchin, Herts. [6469

MAGNETIC Tape.—Emitape on 1,200ft spool, 25/-; G.E.C. A tape, 30/-; blank recording discs, 10in d/sided, 3/-; all from stock; full trade terms available.

SOUND DISCS (SUPPLIES), Ltd., 178, Bispham Rd., Southport, Lancs. Tel. 58153. [5335

INFINITE baffle corner deflectors, scientifically designed acoustic chambers for 8 to 15in speakers; lists.—Broadcast & Acoustic Equipment Co., Ltd., Tombland, Norwich. [0064

QUALITY tape recording, ballbearing capstan, reel spindles, rollers; all parts precision-made; list 2½d.—"Magnetic Tape Recorder Construction," gives theory, mechanical-electrical constructional data; 28 f/cap. pages, 11 sketches, 7/6.—GM6LS, 15, Corstorphine Hill Rd., Edinburgh. [6899

CINE-VOX disc recording equipments, type C7J for high-quality recordings from existing microphone equipments, price from £295; also available as a complete channel inclusive of mic., amplifier and playback equipment, at 70gns; type C7, for highest quality professional requirements—recorder mechanism at 48gns, or complete channel at 110gns; demonstrations arranged in London.

PLEASE write for details to K.T.S., Ltd., 60, Aylward Rd., London, S.W.20. (Liberty 2426.) Callers by appointment only. [6724

"MAGNETAPE" recording panels, two speeds, 7.5 and 15 ips selected by 2-position switch, automatic braking, rewind tape lifting and tape tension mechanism all interlocked to 3-position switch, simple to operate, no tape spills, no unlacing of tape for rewind, tape can be inched in either direction with instantaneous stop and start for easy editing and cueing, hi-fidelity record/play heads using full width track for high noise recording, top panel size 19in/12in in black perspex and is symmetrical in layout, heads and mechanism enclosed in moulded perspex cover; price £25; stamp for details.—Electronechs, Euston Chambers, Morecambe, Lancs. [6932

GRAMOPHONE AND SOUND EQUIPMENT —SURPLUS AND SECONDHAND

TANNOY metal projection horns, 37/6.

TANNOY flared metal horns with speakers, 70/-.

LOUD Hailers complete, 80/-; 12-volt mobile amplifiers, £9; all in good condition.

RADIOVOX SOUND SYSTEM, 5, Oxford Place, Leeds, 1. [6813

UNUSED A.S.P. wire recorder deck, £13; immediate sale.—Box 1291. [6853

SOUNDMIRROR tape recorder, hardly used, orig. carton; offers, exchange Leica.—Lad, 0780. [6917

WILKINS & WRIGHT super quality coil pick-up, unused, £6/10.—Fletcher, 1a, Queensberry Place, S.W.7. Ken. 5776. [6865

DISC recording machine, Presto Model D, 10in or 13in discs, 33⅓ or 78 r.p.m., stock of discs, best offer around £45.—Box 1289. [6825

AMERICAN brush sound mirror tape recorder with mike and transformer, in new condition, £57/10.—Harris, 93, Wardour St., W.1. [6834

TAPE recording amplifier, by Scophony-Baird, erase and mic. inputs, independent volume controls, complete with microphone, recording head and speaker, £30.—Box 1355. [6901

COLLARO RC49 changer, £10; Decca 33A L.P. desk, £8; P.P. amplifier and 10in speaker, £8; all four in solid oak cabinet, £30.—99, Ranelagh Rd., E.1. (Tow. 2660.) [6873

MAGNETIC sound recording wire, stainless steel, temporary wooden spools, approx 1¼ hours' running time at 2ft per sec., 14/- per spool.—A. Smart, 40, Orange Rd., Halesowen. [6491

B.S.R. direct disc recording outfit, comprising amplifier AR15C, disc recorder (type DR33C in leatherette cases, interconnecting leads, monitor loudspeaker, sapphire cutting stylus, etc.; scarcely used and still under guarantee, cost price over £200, offered at £120.—Lamberti, "Severn," Markham Ave., Rawdon, Leeds. [6851

Surplus BARGAINS

MANUFACTURERS' & BANKRUPT STOCKS
LIMITED SUPPLIES ONLY

PRICES ARE RISING
SUPPLIES ARE GETTING SHORT

—BUY NOW—

ALWAYS SOMETHING NEW
VISIT OUR SHOWROOM
We can offer for immediate delivery

JUST IN! PURCHASED FURTHER STOCK

—DIRECT FROM M.O.S.

STORAGE AND STARTER BATTERIES

6 volt. 72 Amp.	"ESE"
6 volt. 90 Amp.	15 plate "Reading" U.S.
6 volt. 100 Amp.	15 plate "Delco Remy"
6 volt. 140 Amp.	21 plate "Delco Remy"
12 volt. 9 plate.	

12 volt. 14 Amp. In METAL CARRYING CASE.

All Brand New in original cases.

Receivers: R1155, 1355 and 184 Brand New in original cases. Dinghy Radio Transmitter SCR 578.

EX-W.D.

AERIALS

CAN ALSO BE USED AS

FISHING RODS

12 ft. Steel Aerials (3 sections of 4 ft.)



MAKE IDEAL FISHING RODS

Charging Control Boards with Auto. cut out, 3 amp. 220 v.

2 Volt Accumulators, suitable for Radio or Model Driving. House Lighting, etc. Heavy Mass Type Plates. Pre-charged. Only need filling. Size: 7in. x 2in. x 2in.



Magnifying Lenses, Rubber Masks, Burgoyne Solder Guns. Bakelite Accumulators. Ex-Govt. S.W. Condensers. All types. Meters, Switches, Toggle and Yaxley. Headphones, L/R and H/R. Vibrators, 6 and 12 v. Speakers all types. Volume Controls. Output Transformers. Chokes. Crystals—Valves Type CV.101.

Your enquiries are invited

WHOLESALE AND EXPORT ONLY

For further bargains call at our Counter or write for new bulletin

RADIO MERCHANDISE
COMPANY LIMITED
65, Farringdon Road, London, E.C.1
Telephone: HOLborn 6377

GRAMOPHONE AND SOUND EQUIPMENT —SURPLUS AND SECONDHAND

B.S.E. direct disc recording outfit in leatherette covered teak carrying cases, comprising amplifier, disc recorder, playback loudspeaker. B.S.E. ribbon microphone, floor stand, microphone matching transformer, Brown M.C. monitor headphones, all connecting leads, sapphire and steel cutting stylii, and copying desk with Decca pick-up, new condition, cost £260/10 £160 or offers.
HARVIE & HENDERSON, 93, Eastwood Mains Rd., Clarkston, Glasgow. [6053

NEW COMPONENTS

WIRELESS World Televisor.

A LUXURY receiver, ideal for fringe areas and used conventional valves; complete parts list available; booklets, very detailed, suit beginner; 5/-.
RF STRIPS, to spec. with boxes, V/H; screens 52/6.
RF COILSETS, 20 pieces, to spec.; 42/6.
LINE transformers, to spec., 2 types avail.; 42/-.
DEFLECTOR coils, set 4 mounted; 45/-.
FOCUS coils, potted, 1K, heavily made; 37/6.
BLOCKING transformer, 1:1 ratio; 15/-.
EHT, 6/9KV tripler unit, kit, 77/6; potentiometers, resistors, condensors, also mains transformer, and all other parts.
SYNCHRODYNE, FM receiver, and Balun coils, RF Horn metalwork, made to order.
INDUCTANCE, measure 10uH to 10H accurately with a simple bridge, uses standard parts, circuit and instructions; 5/-.
TUNER unit, a tiny TRF 2-station RF feeder, med. wave, suitable to drive TV sound OP viv., 2X3X1in chassis, 2-miniature v/holders, switch, trimmers, 4 coils, circuit; 20/6.
MINIATURE coil cans, ¾in square, and cored formers, 1/10; miniature condensors, .01 and .001, 350v, 1/6 and 1/8.
JUNE bargain, 1¼in×1in iron cored superhet coils, SW and MW, AE and osc., 465 IF, single hole fixing, with 5-valve circuit; 6/- per set.
CALLERS, sig. gens., v/voltmeters, lab. parts. TRADE supplied.
BEL SOUND PRODUCTS Co., Marlborough Yard, London, N.19. Arc. 5078. [0185

HANNEY OF BATH, offers:—
WILLIAMSON amplifier, kit of resistors and pots. for main amplifier, 22/-; ditto fig. 19, 32/6; fig. 15, 19/9; fig. 13, 8/7; condenser kit for fig. 19, 54/6; fig. 15, 47/-; fig. 13, 15/-; matched pairs of resistors, 47K 1 watt, 5/- pr.; 22K 1½ watt, 2/- pr.; all HR resistors and 1% silver micas available as previously advertised; Williamson tone unit (fig. 19), wired and tested, a laboratory job at 12gns and exactly to specification.
EDDYSTONE 740 receiver . . . we always have a reasonable number of these on order, get into touch with us about delivery; current price £35/10.
WE have reasonable stocks of the following:—
W.B. STENTORIAN speakers, 2½in, 17/3; 3½in, 18/6; 5in, 17/6; 7in, 23/6; 8in, 24/-; also 4 only Wharfdale Golden 10in 2-3 ohm at 80/-; Wearite P coils, full range always, ex-stock, 3/- each; Denco C coils, 6/6 per pair.
WIRELESS World TV sheet; set of 20 coils exactly to designers specification, 45/- (Logan, Pham or Holme Moss); polystyrene and paxolin formers still available as previously advertised. SEND 3d stamp for our lists which contain information on almost everything you require; retail only.
L. F. HANNEY, 77, Lower Bristol Rd., Bath. Tel. 3811. [6820

WIDE range of components and valves in stock; 1951 catalogue sent free upon request.
M. WATTS & Co., 6, Baker St., Weybridge, Surrey. [6840

CRYSTAL microphone inserts (Cosmocord Mic-6), guarantee' brand new, 15/6 post free.
RADIO-AID, Ltd., 29, Market St., Watford. Tel. Watford 5986. [0036

RADIO components, valves, transmitting equipment, television accessories, telephone equipment, electrical measuring instruments, electronic apparatus, etc., etc.
EXPORTERS and others requiring or having for disposal, any of these items, are invited to contact us for immediate attention and service.
R. C. SERVICES (RADIO), 12, Theobalds Rd., London, W.C.1. Telephones: Chancery 5235/4. [6719

CAPACITORS, finest British makers, at exceptional prices, most popular sizes available, 50-1,000pF, 6/6 doz; 1,500pF-.1mF, 8/6; all 500v wkg.; .25 and .5mF, 350v, 10/6.
QUALITY MART, 110 Villiers Road, Watford, Herts. [6422

EHT Transformers, mains transformers, output transformers and chokes; open or potted types; transformers designed to individual specification; singles or in quantity.
WILLESDEN TRANSFORMER COMPANY, Ltd., 20a, Church Lane, Church Road, N.W.10. [0078

EVERYTHING for home constructor, chassis, condensers, coils, valves, resistors, tram units, speakers, test gear, Viewmaster kits, etc., cash or H.P.; stamp for lists; quick service, no Govt. surplus offered.—RCM/KDJWA, London, W.C.1. [6227

MIDGET TRF Pre-set 5-station Coilpack Kits as previously advertised, 19/-; midget relays, 5,000 ohm coil, weight 1oz, 10/-; special Viewmaster pre-amp kit, exact to author's specification with valve and instructions, 42/-; brand new 6V6GT/G valves, 7/6 each; all c.w.o.—A. F. Cretton (W), 349 Connor Rd., Portsmouth. [6634

"DEMOBBED VALVES" MANUAL

2/9 POST FREE

giving Equivalents of British and American Service and Cross Reference of Commercial Types, with an Appendix of B.V.A. Equivalents and comprehensive Price List. We have still some Valves left at PRE-BUDGET rates which are actually sold at the old price.

3/16in. DIA. BIT SOLDERING INSTRUMENT. Miniature type to meet every requirement for Radio, Television, etc. 23/6. Post 1/-.

HEADPHONES (S. G. BROWN). High Resistance and Lightweight Type Standard D.C. 4,000 ohms. 27/6. Post 1/-.

LOUDSPEAKERS. Baffle with Volume control, in luxury Cabinet. 35/6, post 1/6.

MULLARD MANUAL, with Base Diagrams. 5/6.

MORSE BUZZER OUTFITS. Consisting of a buzzer, a morse key and a battery compartment, all mounted on a polished base board. All parts high grade ex-Air Ministry An excellent gift for a boy. 6/-, post free.

CONDENSER TESTERS and Rectifier Units. Plugs straight into A.C. mains 200/240 v. and is indispensable for examination of condensers. Very slight and intermittent leakages which cannot be discovered by conventional instruments can be traced by this unit. Complete 39/6.

SERVICE SHEETS, the one you require on FREE loan if you buy one dozen assorted at 10/6.

RESISTOR Colour Code Discs, 1/-.

2in. BALANCED ARMATURE TELEPHONE INSERTS, 4/-.

MORSE TAPPERS, ex-Govt., 2/-.

1-FOOT AERIAL RODS, ex-Govt., doz., 6/-.

HYDROMETERS, non-break type, 6/-.

ELECTROLYTIC CONDENSERS, 25 mfd., 25 v., 1/-; 8.5 mfd., 350 v., 1/-.

TEST PRODS, Superior Product, 3/6.

ERIE RESISTOR KITS, containing 56 ½-watt insulated Resistors, all clearly marked, in metal cabinet, £2. Postage 1/- extra.

SOLON PENCIL BIT SOLDERING IRON. 45 w. 230-250 v., 21/-, post 1/-.

HOME BROADCASTER.
Connects to your radio pick-up or gram. sockets. Talk or sing over your own radio from room to room. Easy to fix. With 2 microphones you can fix a 2 station house-phone in your own home. Order to-day



12/6 Post 1/6

STOP PRESS.

JUNEERO multi purpose tool (1,000 uses) for bending, cutting, punching, slotting 29/- (post 2/-). (With "Xakto" slide gauge. 27/6).

Goods can be sent C.O.D. (over 20/-). Kindly mark envelope (WW6)

RADIO BULLS VALVES
246 HIGH ST. NORTHOLT

A Festival of Sound!

COME TO

HOLLEY'S RADIO STORES

285, CAMBERWELL ROAD, S.E.5.

Demonstrations daily of
SOUND SALES A-Z Amplifier, TONE COLOUR Control Unit and new DX Radio Tuner

LEAK TL 12 Amplifier, RC/PA/U Tone Control and V.S. Radio Tuner

ACOUSTICAL Q.U.A.D. Amplifier and Pre-set Radio Tuner

WILLIAMSON AMPLIFIERS and Radio Tuners by GOODSELL Ltd.

CHARLES New K5I Amplifier and R.C. Tuner Unit

Recommended SPEAKERS
VOIGT Corner
TANNOY "DUAL CONCENTRIC"
WHARFEDALE Corner DUAL
BARKER 148a and 150 Units
Units by GOODMANS

SOUND SALES PHASE INVERTER
DECCA Corner Speaker and long playing RECORD EQUIPMENT

TWO SPEED MOTORS AND L.P. PICK-UPS
RADIOGRAM AND CORNER SPEAKER CABINETS

Open all day Saturday.
Callers only.
'Phone : RODney 4988

NEW ELECTRONIC SUPPLIES Co.

281 LEEDS ROAD, FAGLEY, BRADFORD, YORKS

MAIL ORDER ONLY

Primaries 200/250. Varnish impregnated. **New goods only.** S = drop through. F = fully shrouded. W.F. = skeleton finish, upright. Special quotes 48 hours. **Stamp, please.** C.W.O. carriage paid.

S261. 250-0-250 v. 75 m/a., 6.3 v. 3 a., 5 v. 2 a.	19/11
***S350.** 330-0-330 v. 90 m/a.	21/3
***S350.** 250-0-250 v. 110 m/a.	23/11
***S300.** 300-0-300 v. 110 m/a.	24/11
***S351.** 330-0-330 v. 110 m/a.	26/11
Above marked * have L.T.s 0-4-6.3 v. 4 a., 0-4-5 v. 2 a.	
S315. 250-0-250 v. 160 m/a., 6.3 v. 3 a. C.T., 5 v. 3 a.	30/11
F315. 350-0-350 v. 160 m/a., 6.3 v. 6 a., 6.3 v. 2 a., 5 v. 3 a.	43/9
***F350.** 330-0-330 v. 90 m/a.	28/3
***F250.** 250-0-250 v. 110 m/a.	24/11
***F300.** 300-0-300 v. 110 m/a.	25/11
***F350.** 350-0-350 v. 110 m/a.	27/11
Above marked * L.T.s 0-4-6.3 v. 4 a., 0-4-5 v. 2 a.	
W.F.2. 300-0-300 v. 70 m/a.	16/3
W.F.1. 330-0-330 v. 70 m/a.	17/6
Above 3 L.T.s 4-5 v. 3 a., 5 v. 2 a.	
W.F.4. 350-0-350 v. 80 m/a.	19/11
W.F.5. 260-0-260 v. 90 m/a.	19/11
W.F.6. 250-0-250 v. 90 m/a.	20/11
Above 3 L.T.s 6.3 v. 3 a., 6 v. 2 a.	
S3515. 350-0-350 v. 150 m/a., 6.3 v. 4 a. C.T., 5 v. 3 a.	29/6
F3515. 350-0-350 v. 150 m/a., 6.3 v. 4 a. C.T., 5 v. 3 a.	32/9
S305. 250-0-250, 100 m/a., 6.3 v. 6 a., 5 v. 3 a.	27/9
F305. 250-0-250, 100 m/a., 6.3v.6 a., 5 v. 3 a.	29/11
Williamson mains F.628. 425-0-425 v. 200 m/a., 6.3 v. 4 a. C.T., 6.3 v. 4 a. C.T., 5 v. 3 a.	58/11
Williamson Amplifier Components below :—	
Pre-amp. Mains. F.325-0-325, 20 m/a., 6.3 v. 1.5 a., 6.3 v. 0.6 a.	21/11
C.K.8. 30 H. 90 m/a., 1,500 ohms.	21/11
C.K.9. 10 H. 150 m/a.	29/11
C.K.10. 30 H. 20 m/a.	16/-
W.F.C.11. 6 H. 110 m/a.	14/11
All above very heavy jobs, generous design.	

Lb. bobbin silk covered 7/36-40 Wire (suitable coil winding) **2/6** per bobbin.

F

NEW COMPONENTS

YOU are bound to try an Osmor "Q" Coil-pack eventually and be delighted with the results; why not save time and money now? Send a stamp for free circuits and latest lists of coils coilpacks, dials, etc., etc. OSMOR RADIO PRODUCTS, Ltd. (Dept. W.C.A.), Borough Hill, Croydon, Surrey. (Tel. Croydon 1220.) [0066

VALVE adaptor washers for modifying existing chassis to incorporate the new glass base valves; type 2366 suitable B9A-Noval, or B8A valveholders, 2/- per dozen, £1/2/6 per gross; type 2350 suitable for B7G valveholders, 2/- per dozen, £1/1 per gross; c.w.o. or c.o.d.; despatch by return. SOUND SALES, Ltd., West Street, Farnham, Surrey. [6841

RADIO and radar equipment; suitable for "Radio Fans" and "Hams"; comprising: Ultra short power units, receivers, transmitters, chokes, serials, drive motors, SW units, test gear, component parts; trade enquiries invited; send p.c. for trade sheet.—E. Barrett, 27, Hockerill, Bishop's Stortford. [6869

16/6 pair only; we can now supply the world-famous "MM" L.F. transformers (variable iron dust cored, high "Q" high stability) pre-aligned to 465 Kc/s at only 16/6 pair; iron dust cored coils for standard wavelengths available at 3/- each; Coil Group A consisting of 6 Supacoils (your own selection from our range), 1 four pole three way switch, 2 fixed padders, suitable for coils selected, and 6 variable trimmers, all for 29/-; Coil Group B, similar to above but with 9 coils (your choice), six pole three way switch, 2 padders and 9 trimmers, all for 47/6; Home Constructor's Handbook, 2/-; see also our display advertisement in this issue. SUPACOILS, 98, Greenway Ave., London, E.17.

COMPONENTS—SURPLUS AND SECONDHAND

C. J. EMMS, Ltd.

RECTIFIERS, full wave bridge type, as follows: 1 amp, 12 or 6v, 5/6; 3 amp, 12 or 6v, 12/6; 4 amp, 12 or 6v, 15/-; 5 amp, 12 or 6v, 17/6; 7 amp, 6 or 12v, 22/6; 24v 1 amp, 11/-; 24v 3 amp, 25/-; 24v 4 amp, 30/-.
NEW sliding resistance sets from 1 to 4 amp 14 ft. to 12 amp 10 ft., 7 in all, 30/- per carton.
26a, Colherne Mews, London, S.W.10. Fremantle 8941. [0201

SEND s.a.e. to-day for our latest list to WALTON'S WIRELESS STORES, 203, Staveley Rd., Wolverhampton. [0061

BENDIX BC.221 frequency meters complete; £30.
S.C.R. 522 frequency 100-156 mcs complete transmitter/receiver, in new condition, with all tubes; £30.
EIMAC 100th transmitting valves; 55/-.
TAYLOR T200 transmitting valves; 45.
THROAT microphones, new and boxed; 4/6.
PLUG and key assembly No. 3 with send/rec. switch; 5/6.
LEACH relay heavy duty 24 VDC, res. 250 ohms; 7/6.
CLARKE keying relays; 17/6.
PAPER condenser, 4mfd 300v wkg., 6/6; paper condenser, 0.25mfd 1,200v wkg., 4/-; paper condenser, 0.05 plus 0.05, 2,000v, 4/-.
SMALL porcelain jumbo, 4-pin bases; 4/- each.
LARGE porcelain jumbo, 4-pin bases; 6/6 each.
McELROY-ADAMS MFG. GROUP, Ltd., 46, Greyhound Rd., Fulham, W.6. Tel. Fulham 1802. Cables: Hallicraft, London. [0196

MAGSLIPS at 1/10 to 1/20 of list prices, huge stocks, please state requirements.—K. LOGAN, Westalley, Hitchin, Herts. [6369

SUPREME RADIO, 746b, Romford Rd., Manor Park, London, E.12. Tel. Ilf. 1260. Est. 16 yrs.
THIS month's super barrains:
CARBON vol. controls, all less switch, 100k ohms 1/3 ea., 5k ohms 1/- ea., .25 megohm 2/- ea.
YAXLEY type switches 3-pole 3-way 9d ea., 2-pole 2-way type 8d ea., 7 ohm wire wound slide type resistors 6d ea.
WESTINGHOUSE type metal rectifiers, 250v R.M.S 65M/A 4/- ea., Sentercel type rectifiers, 125 volt 75 M/A 4/3 ea., 5 M/R meter rectifiers, bridge type, 5/- ea., C.V.103 crystal diodes 2/6 ea., noise suppressor units, consisting of 2, .1mfd cond and iron cored choke 6d ea., 650 ohm .2 amp flat type mains dropper tapped for 200-250v 1/6 ea.
PERMANENT magnet focus units for triode or tetrode tubes or a high flux type, an amazing bargain, state type required. 16/- ea.
PANELS with 6 resistors and 5 condensers or with 6 resistances, WX6 and 1 PP, all handy values, either panel 6 ea., 50mfd 50 volt tub. cardboard bias cond. 1/- ea.; standard size 1-F-Ts 465Kc/s 8/6 pr
DROP thro' type mains trans. primary tapped 0.250v with voltage panel, sec. 275-0-275v 80 M/A, 6-3v 3 amp 5v 2 amp. with screen, 15/11 ea.
ELECTROLYTIC condensers 16×16mfd 450v tub. cardboard, 2/9 ea.; 16mfd 450v tub. cardboard, 2/- ea.; twin trimmers 160 P.F. 6d ea.; trimmer panels with 2 50 P.F. and 2 85 P.F. trimmers 9d ea.
ENQUIRIES welcomed on all types of radio and television component parts.
TERMS: C.W.O., no c.o.d.: send 6d extra for postage orders under £5. [0021

1.2 kva 110/230 auto-transformers, tapped, wire end finish, new but slightly soiled, 69/-; carr. pkg. 5/-.—Champion Products, 43, Uplands Way, London, N.21. [0101

Wire-wound and Composition types. Single, Ganged, Tandem Units. Characteristics : linear, log., semi-log., non-inductive etc. Full details on request.

RELIANCE

RELIANCE MNFG. CO. (SOUTHWARK), LTD.
SUTHERLAND ROAD, HIGHAM HILL, WALTHAMSTOW, E.17
Telephone: Larkswood 3245

DUKE & CO.

TYPE 22/40 TRANSMITTER. 2/6. Relay, crystal and coil wire removed, otherwise perfect. Transmitter includes:—11 resis.; 11 fixed conds.; 6-way Jones socket, 3 international v/holders, 2 tag panels, press button switch, panel of sockets for crystals, s/wave choke, 2 bank Yaxley switch, aerial panel, intervalve trans.; locking clamps, 4 slow motion drives, valve caps, metal chassis and cover. No valves. Ideal for amplifier. Contents not guaranteed. Post 1/6.

T.V. LENSES. 55/-. These are made by one of our most famous manufacturers, nicely packed in their own boxes. Fitted with straps to fix to the back of the cabinet. No screws. All sizes. 8in., 9in., 10in. 12in. **75/-** Post 1/6.

NI-CHROME WIRE. 50 yd. spools of .014 wire for only **2/-**, or 25 yds. .032 same price. These bargains are a fraction of today's prices. (If you can buy it). Post extra.

PHONES. Single head set NEW, very sensitive **1/9.** Double head set CLR used, but all tested **3/6.** Brown's famous head sets, used, tested. **9/6.** Moving coils, with Tannoy mikes, **9/6.** All postage extra.

CONDENSERS. SINGLE tuning, first quality, brand new, **2/6.**

15ft. EX-MILITARY BOATS. 6 gns. Inflatable. New, in two carrying cases. 2 sets of paddles, bellows, etc.; carr. extra.

GERMAN INVASION BOATS. 20 to 30ft. x 6 to 9ft. wide, self draining, inflatable. Room required. Sizes as they come. Made of tough vulcanised rubber. Carriage extra. Only **50/-.**

AERIALS. 12ft. tough, spring steel, copper plated, in 3 tapering sections, **3/6,** carr. 1/6.

ELECTRIC MOTOR BLOWER. 50/-. 1/3rd H.P. 6/Phase, A.C. 110 v. Can be converted to 220 volts. Complete with forge-type blower, 3in. dia. outlet. Motor is 2,850-3,450 r.p.m. ½in. spindle. Carr. extra.

Money back guarantee. Cash with order please, o C.O.D. Stamps ONLY for lists.

219 ILFORD LANE, ILFORD, ESSEX. *ILFord 0295*

GALPINS

ELECTRICAL STORES,

408 HIGH ST., LEWISHAM, LONDON, S.E.13

Tel.: Lee Green 0309 *Near Lewisham Hospital*

TERMS: CASH WITH ORDER. NO C.O.D.

All goods sent on 7 days' approval against cash.

EARLY CLOSING DAY THURSDAY

B.S.I. FIRST GRADE SWITCHBOARD VOLTMETERS. 6in. scale, moving coil, 0-200 volts 30/- ; 0-75 volts 30/- ; A.C. ditto 0-300 volts, 47/6.

MAINS VARIABLE RESISTANCES. 14 ohms to carry 1 to 4 amps, 12/6 each ; 0.4 ohms to carry 25 amps, 10/- ; 1,500 ohms to carry 0.45 amps. **MILLIAMP-METERS CENTRE ZERO MOVING COIL.** 15/0/15 Milliamps. 2½in. scale, 7/6 each, post 9d. Another 0 to 10 Milliamps, 10/- each, post 9d. Another reading, 350/0/350 Millivolts, 12/6 each, post 9d. All new, boxed by well-known makers.

VOLTAGE CHANGER TRANSFORMERS (New) 500 watts tapped 0, 110, 200, 230 volts can be used either way, 65/- each, carriage 3/6. **ELECTRIC LIGHT CHECK METERS,** quarterly type, for sub-letting garages, apartments, etc., all fully guaranteed electrically for 200/250 volts, A.C. mains, 50 cys., 1 ph., 5 amp. load, 17/6 each ; 10 amp. load 20/- each ; 20 amp. load, 25/- each ; 50 amp. load 37/6 each ; carriage 2/- extra on each ; special discount of 10 per cent. on quantities of one dozen or more.

POWER TRANSFORMER AUTO WOUND voltage changer tapped 0, 110, 150, 180 and 230 volts at 1,600 watts, £5/5/- each, carriage 3/6 ; ditto, 2,000 watts, £6/5/- each, carriage 3/6 ; another tapped 0, 110, 200, 230 volts at 350 watts at 48/6 each, carriage 2/-.

DOUBLE WOUND 3,000-WATT VOLTAGE CHANGER TRANSFORMERS. 130 to 250 volts or vice versa, weight 100 lb., £10 each, carriage 10/-.

MAINS BOOSTER TRANSFORMERS. 1,500 watts tapped 0, 6, 10, 19, 175, 100, 225, 240 and 250 volts, good condition, electrically guaranteed, £4/15/- each, carriage 5/-.

SWITCHBOARD METERS. 4in. scale ; 0 to 14 amp. D.C., 17/6 each ; 0 to 30 amps. A.C./D.C., 22/6 ; 0 to 14 amps. A.C./D.C., 22/6 each. All fully guaranteed.

MAINS TRANSFORMERS (New). All 200/250 volt primaries in steps of 10 volts. Output 350/0/350 volts, 320 mA., 6.3 v. 8 a., 6.3 v. 8 a., 4 v. 4 a., 5 v. 4 a., 42/6 each ; 500/0/450 volts 300 mA. 6.3v. 8a., 6.3v. 8a., 5v. 4a., 42/6 each ; 500/0/500 volts 4 v. 4 a., 300 mA., 6.3 v. 8 a., 6.3 v. 8 a., 6.3 v. 4 a., 5 v. 4 a., 3 v. 4 a., 67/6 each ; 350/0/350 volts, 250 mA., 6.3 v. 8 a., 4 v. 8 a., 4 v. 4 a., 6.3 tapped 2 v. 2 amps. (Electronic), 57/6 each, carriage 3/6.

MAINS TRANSFORMERS (New), all with 200/250 volt primaries in steps of 10 volts ; output 350/0/350 volts, 180 mA., 6.3 v. 8 a., 5 v. 3 a., 37/6 each ; 350/0/350 volts, 180 mA., 6.3 v. 4 a., 5 v. 3 a., 4 v. 4 a., 37/6 each ; 500/0/500 volts, 150 mA., 6.3 v. 5 a., 4 v. 4 a., 5 v. 3 a., 42/6 each ; 425/0/425 volts, 160 mA., 6.3 v. 3 a., 6.3 v. 3 a., 5.3 a., 39/6 each, carriage extra 1/6.

MAINS TRANSFORMERS. 230 volts, 50 cys., 1 ph. input, tapped output, 0, 6, 12, 18 volts at 4 amps., at 17/6 each, post 1/6 ; another 230 volt input, 700/0/700 volt, 70 mA., 12 v. 1 a., 4 v. 2½ a., 27/6 each, post 1/6.

METERS, EX-W.D. SURPLUS (New), 2in. scale, moving coil 0 to 20 volts 6/- each, post 9d. ; another 0 to 40 volts, 7/7 each, post 9d.

DUCOIN VARIABLE TARIFF ELECTRIC LIGHT 1d./1s. SLOT METERS, all fully guaranteed 200/250 volt A.C. mains 5 amp. load, 42/6 each, carriage 2/6.

SMALL SIZE CREDIT-TYPE ELECTRIC METERS, 200/250 volt A.C. mains, overall size 4½in. × 3½in. × 3½in., weight 4 lb., 10 amp. load, 25/-, post 1/- ; 20 amp. load, 30/-, post 1/- ; 25 amp. load, 35/-, post 1/-, fully guaranteed electrically.

ROTARY CONVERTERS, 24 volts D.C. input, 50 volts 50 cycles, 1 ph. at 450 watts output, complete with step-up Transformer from 50 to 230 volts, £7/10/- each, carriage 10/-, condition as new.

ROTARY CONVERTERS, EX-NAVAL, well-known makers, 100 volts D.C. input, 230 volts 50 cys. 1 phase at 250 watts output, capable of 100 per cent overload, weight 100 lb., condition as new, £10/10/- each, carr. paid.

EX-R.A.F. MICROPHONE TESTERS. These contain a 2½in. scale 0 to 450 microamp. meter shunted to 1 m/amp., calibrated 0 to 10 volts, moving coil, complete with 1 mA. rectifier, "mike transformer," etc., all contained in polished wood box, as new, 17/6 each.

MAINS TRANSFORMERS (New). All 200/250 volts input in steps of 10 volts. Output 0, 6, 12 and 24 volts at 10/12 amps., 47/- each ; 0, 18, 30, 36 volts at 5/6 amps., 42/6 each ; 0, 6, 12 and 24 volts at 25/30 amps., 68/6 each, carriage 5/-. 0, 6, 12 and 24 volts at 3/6 amps., 33/- each, carriage 1/6.

COMPONENTS—SURPLUS AND SECONDHAND

RADIO CLEARANCE, Ltd.

TELEVISION! Set of 3 components, comprising line output trans., with E.H.T. winding to give 7 kV, using EY51 (heater winding for EY51 also included), and fitted with width control scanning coils, low impedance line and frame, focus coil (res. 10,000Ω, current approx. 20 mA) the set of 3 for 42/- plus 1/6 post., diagram of line trans supplied, scanning coils, as "Viewmaster," low imp. line and frame, 12/6 plus 9d. **MINIATURE** iron cored coils, former size 1⅜in. × ⅝in. adjustable core, set of 4 coils, M.W., AE and OSC, S.W., AE and OSC, 5/11, post 6d; mains dropping resistors for .15a valves, 920Ω, tapped at 850 and 700Ω, small size (3in.×⅝in), 2/6.

A.C./D.C. amplifiers, complete kit for construction of 20w, 8v amplifier, by McMurdo, all first-class components, by Partridge, Gardner, etc., valves 4×CL33, 2×EF37, 2×UR3C, black crackle, chassis and case, isolated from mains, and drilled, circuit diagram supplied, everything complete, £10/19/6, carr. paid; television focus coils, for 9 or 12in mag. tubes, res. 10,000Ω, average current 20mA, 7/6.

PERSONAL receivers, 3 valve T.R.F. using 1T4's, contained in handsome bakelite case with lift-up lid, size 7×6½×5in. with lid closed, plastic carrying handle, from AE in lid, these receivers cover the medium waveband and operate from self-contained dry batts., standard types, W1435 and D1, output to a pair of lightweight 'phones (H.R.) controls, S&M tuning and reaction, opening lid switches on, supplied brand new, with valves, batteries, 'phones, an ideal set for invalids, boys, patients, etc., these receivers are not Govt. surplus and are offered ready to play; carr. paid 23/9/6.

CHASSIS steel 5¼×5¼×1¼in drilled 3 button base holes 1/9, 7×9×1½ drilled 5 button base holes, 2/3, 17×7×2½ drilled 12 holes, 3/11, 18in. square, open ends 3/-, all. 14½×10×2¾ drilled 10-BSA, 5 int, octal, ex. T.V. 4/3; E.H.T. trans. 4kv 1ma, 5v 2a secs, primary 230v, 50c/s, gives approx. 5,500v with usual smoothing, 29/6; primary 0-110-210/240v 50c/s, secs 500-0-500v 80ma, 4v 2a, 6.3v 2.5a, 15/6, heater trans., auto. wound 200/250v 50c/s to 6.3v 3a, 8/-; smoothing chokes 250Ω 150ma 35H 6/11, 5H, 200ma 100Ω 5/6, 6H 200ma 100Ω 6/6, 8H 250ma 50Ω size 4×5×5 potted 10/6 post paid; electrolytics 32mf 350v card 2/-, 32-350v can 3/6, 25-25v 1/3, 25-50v 2/6, 50-25v 1/3, 100-12 1/3, 16-450v can 2/6, 16+48 450v can 5/-, 60mf 450v can 3/6, 8+4 450v can small 2/9, 8+4 275v 2/-, 2-450v 1/6; switches standard Yaxley type, 2p 6w 1lb with shorting wafer 2/-, superhet coils 1⅛in×1¼ formers M. wave H.P. AE, Osc. L. wave H.P. AE, Osc. 1/9 per coil; I.F. trans 465K/cs 1⅛×1¼×4in iron cored 8/- pair; meters metal cased 0-15/600v 2in circular, req. cut. res 6/6; meters 2in square bakelite cased 0/1ma 9/-, 0/5ma 6/6, 0/50ma 7/6, 0/300v d.c. with series res. 7/6, 0/20v 5/6; bakelite cased 2½in circular 0/300ma 9/6; Rotary power units type 104, p.m. rotary mounted on chassis with supp. input 12v d.c. output, 250v 60ma, 6.5v 2.5a d.c. 8/-, type 87 24v input, outputs as 104 5/6 post paid; plugs and sockets, bakelite with keyway, 5, 7, 10-way, 1/6 pair; 8-way "Jones" with cover 1/6 pair; bakelite cases with lid, inside meas. 6×6½×3¾, without lid, lid 1in deep, with former for frame AE, lid requires fixing, ideal for personal sets, meters, etc., 6/6 post paid; extension speaker controls 10Ω wire wound, ½in spindle 2/6; "Pye Strips" the well-known 45mc/s vision strips, brand new, less EF50s, with EA50, perfect condition, 39/6, plus 1/6 post; focus coils, low res., 200Ω, standard TV 6/6 can be had as alternative with kit, if required; 6½in loudspeakers, p.m. less trans., boxed, 12/6 post paid; Mansbridge cands. 4mf 1000v wkg. 3/-; v.c. with sp switch long spindle 25k, 50k, 100k, 2M 4/-.

RADIO CLEARANCE, Ltd., 27, Tottenham Court Rd., London, W.1. Tel. Museum 9188. [0015

SOUTHERN RADIO SUPPLY, Ltd., 11, Little Newport Street, London, W.C.2. See our displayed advertisement page 94. [0016

LITTLEWOODS. North London's best selection of radio and television components; pay us a visit or post or 'phone your enquiries; no lists. LITTLEWOOD & GRINER, Ltd., 27, Ballards Lane, Finchley, N.3. Fin. 5060. [0055

RADIO components, etc., quickly obtained from our regular bargain lists. Don't delay—send s.a.e. to-day! Goods c.w.o. only. Money back guarantee.—Ansaknin, 25, Ashfield Place, Otley, Yorks.

5000v trans., 35/-; focus coil, 912H, 30/-; both Haynes; Gardner Somerford 500v 200ma 6.3v-2.5a, 6.3v-3a, 5v-3a, 30/-; 450v 180ma 2×4v-4a, 6.3v-3a, 25/-; M.C. flush meter, 150ma, 10/-; all unused.—17, Thorndene Avenue, N.11. [6914

230/115v step-down transformers, 75-watt, 6/6; heavy duty output transformers, weight 3¼lb, two primaries, one centre tapped and one secondary 4 taps, these can also be used as small mains transformers, delivering 150-0-150v at 100 ma and 10-20-30-40v all at 65 ma., 230v input, only 4/6; wanted, tape or wire recorder.—Haynsome, 14, St. Mary's Bedford. 'Phone 5568.

SPOTLESS components.—Choke 7h 60ma, 6/9; mains trans. 350/0/350, 80ma, 6v, 5v, tub. tap 4v, univl., mntg., 17/6, each; 350/0/350, 80ma, fully shdd., 6v, 4v, 29/6; P.M. spkrs., 3¼in 14/6, 5in 14/6, 6½in 15/3, 8in 15/6, 10in 25/-, 12in 66/-; Standard CoAx 80 ohm, ¼in, 12/6 doz. yds.; Ampliton cnds., ¼in spindle, less/sw 4/-, 3P/sw 5/9, DP/sw 6/6; mtl. recs., 250v 60ma, 6/11 each.—Radio Unlimited, Elm Rd., London, E.17. [0062

A WINDOW WORTH LOOKING INTO

Meters. 2in. round 0-500 microamp movement, 7/- each ; Indicator Units, type 217/a, containing 0-100 microamp movements, 39/6 each ; 2in. round 0-1½ mA, 7/6 each.

Transformers. Special offer ex-W.D. 230 volt input 50 cycle, output 4 volt 8 amps., 6.3 volt 1 amp C.T., 12/6 each ; E.H.T. transformers, ex-W.D., 230 volt 50 cycle input, 1800 volt 20 mA output, 19/6 each.

Rectifiers. 12 volt 5 amp Full Wave, 17/6 each ; 24 volt 5 amp Full Wave, 32/6 each ; 850 volt 40 mA, 8/6 each ; 2 volt ½ amp, 2/6 each ; 48 volt 60 mA, 2/6 each ; 12 volt 1 amp, 10/6 each.

Television. Amplifiers, type 208a, complete with 2 E.F. 50's for 45 Mc/s or sound complete with mod. circuit, 13/6 each.

Television. Ditto, single stage, less valve, 4/6 each.

Output Meters. American type CWI-60ABJ, complete with 0-50 2½in. microamp meter, 72/6 each.

Ground Station. Remote control, complete with type D morse key, brand new, 10/6 each.

American type, 58 Transmitter-Receiver. Slightly gashed but complete with 100 Kc. crystal, 19/6 each. Very limited number only, special Hams' Treat.

Switches. 2 bank single pole 8 way, 1/9 each ; 1in. single pole 7 way, 1/3 each ; heavy duty 2 pole 6 way, will pass 10 amps 250 volt A.C., 5/6 each ; 1in. 3 pole 4 way, 9d. each.

Telescopic Aerials. 15in.-7 foot in Dural, ideal for television aerials, 5/6 each.

Television. Power packs, ex-W.D., type 285, complete television power supply. Input voltage 230 volt 50 cycle, output 350 v 250 volt 200 mA, 6.3 volt 15 amps E.H.T. supply, 2500 volt 5 mA, complete with all rectifying valves, 92/6 each. Limited number only.

Television. Receiver type 1355. Brand new, complete with all valves, for Sutton or London, 49/6 each.

Television. Brand new "Pye" 45 Mc/s I.F. strips, using 5 EF50's, diode stage EA50 and cathode follower EF50, complete with all valves, 59/6 each ; ditto less valves, 37/6.

Condensers. "Trouble Free" oil filled, .1 mfd. 5000 volt, the only safe condensers to fit in your television. Limited number only, 2/6 each.

Chokes. L.F. 3 henry 200 mA 100 ohms, 3/6 each ; 5 henry 200 mA 100 ohms, 3/6 each ; 20 henry 100 mA 350 ohm, 6/6 each.

Condensers. Block type electrolytic, 8 mfd. 750 volt, 4/6 each ; 16 mfd. 750 volt, 8/6 each ; 16 x 16 x 16 mfd. 450 volt, 3/6 each.

11 volt Rotary Packs. Fully smoothed input and output, giving 220 volt 60 mA, 17/6 each

Open all day Saturday

G. W. SMITH & CO.

(RADIO) LTD.

3, LISLE STREET, LONDON, W.C.2

Phone : GERrard 8204

Make a better job of it! with the

HENLEY SOLON ELECTRIC SOLDERING IRONS

5 models

FOR INDUSTRIAL USE

ALL THE HEAT IS IN THE BIT

PERFECT BALANCE FOR EASY HANDLING

ALL CONNECTIONS HOUSED AT END OF HANDLE AWAY FROM THE HEAT

CORD GRIP SECURES FLEXIBLE (prevents twist or pull being transmitted to internal wiring)

Write for Folder Y. 10.

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.,
51-53 Hatton Garden, London, E.C.1

If you care to call at

MODERN ELECTRICS LTD.,
164, CHARING CROSS ROAD, W.C.2
TEMple Bar 7587

we should be pleased to demonstrate and give immediate delivery of the

"SOUND MIRROR"
TAPE RECORDER

as described and illustrated on Page 35

"NOT the cheapest but certainly the BEST"

S.A.E. please for catalogue.

Export enquiries welcomed

COMPONENTS—SURPLUS AND SECONDHAND

SYNCHRONOUS clock units, self-starting, 200-250v a.c., 50 cycle, fitted Sangamo motors, consumption 2½ watts size 2½in diam., 2in deep, geared 1 rev 60 mins friction reset.
IDEAL movements for making electric clocks, time switches, etc., complete with 12 to 1 dial train and 5in hands, price 22/6 post paid.
SANGAMO as above, final speed one rev per min, less dial train, ideal for dark room process time, etc., price 20/- each, post paid.
STEP-DOWN transformers, input 220v a.c. 50 cys., output 6.3-0-6.3 volts 19 amps; £3/12/6 each.
WESTINGHOUSE rectifier sets, style 28B, G.P.O., input 200-250 volts a.c., 50 cycles, output 50 volts d.c., 1½ amps; £3/10 each, carr. paid.
DITTO rectifier sets, output 50 volts d.c., 3 amps; £6 each.
BATTERY chargers, input 230v a.c. 50 cy., output 6/12 volts d.c. 4 amps., continuous rating, fitted in metal case 12×6×6in, 5 amp meter and fuses also mains switch on front panel, selenium rectification, crackle finish cabinet; £4/15 each, carr. 7/6.
STAINLESS steel serial wire in 1,650ft reels, gauge 7/.015in, 35/- per reel post paid.
LONDEX Relays type 220, ref. IOP/494, two heavy break contacts, 24 volts, fitted metal cases, 8/6 each.
CORNELL-Dubilier 650 mfd 80 volt working electrolytic condensers, size 6×6×3in; 12/6 each.
"WESTOOL" electric furnaces, 200/220 volts, high and medium heat control for heating two soldering irons, up to inch diam. bits; 50/- each.
CONDENSERS, electrolytic, 1,000 mfd. 25v d.c. wkg; 4/6 each; post paid 45/- per doz.
PERFORMANCE meters type No. 2, fitted standard mains 230v a.c., 50 cycle power pack, 2 V.R.91, 1 V.R.137, 1 SZ40, 1 O.Y.51, 1 V.R.92, and other useful components, £2/5 each, carriage 7/6.
A LARGE assortment of various ex-W.D. radar and radio equipment, relays, power packs, oscillograph units, gears, photographic apparatus available; s.a.e. for lists.
H. FRANKS, 58, New Oxford St., London, W.C.1. Tel. Museum 9594. [0057

EDDYSTONE 640, 1145, transmitters, communication receivers in stock. Hammerling Super Pro, E.R.O., Seniors, Hallicrafter 6.5S, C.R.100, A.R.88D., A.R.88L.F., etc., all in perfect order; R.1155 receivers in new condition; your enquiries are invited for rotary convertors and electric motors, most sizes and types available from stock; motor alternators, 110v d.c. input 230v a.c., 50 cycles, 250 watt output, £8; special clearance of F.H.P. electric motors, 35/-, 110v-250v a.c.
UNIVERSAL a.c./d.c. motors, suitable for sewing machines, 40/- each; 12v-15v a.c./d.c. motors with extended spindle, suitable for models, etc., 9/3; 20 watt P.A. rack mounting amplifier, new and complete, with heavy duty a.c. power pack, 200/250v, PX25 P.P. output, £4/10, less valves; new moving coil microphones, hand type, heavy duty and complete with 15yd screened cable, £3/15; 20ft telescopic tubular T/Y mast, 15/6 each; large selection of test equipment; multirange meters, valve testers, signal generators, oscilloscopes, bridge meggers and meggers, etc., all at reasonable prices; hand bearing prismatic compasses with provision for battery in handle, perfect, 40/- each; very large stocks of transmitting valves, Klystron, of all types, send us your requirements; special offer of new, not ex-W.D., mains transformers, 200/250v 350/0/350v tapped primary, 250-0-250, 100ma, 5v 3amp, 6v 4amp, 20/- each; large stocks of L.T. transformers, special sizes and ratings wound to specification; auto-record changers in stock from £10/15; switchboard mounting voltmeters, ampmeters, various ranges a.c. and d.c. available at cheap prices to clear; large stocks of enamelled wire, 22 s.w.g., 18 and 20 s.w.g., D.S.C., No. 15 U.K. base, American valves available. Special offer: H.R.O. coils, .48-.96 m/c and 160-430 k/c, 45/- each; quantity of lits and nickel chrome wire available; 100 microamp meters, 2½in scale, new, 70/- each; type 74 indicator units, complete with tube, as new, £5 each; Fluxmeters, model WY0023, complete, new, £5/10; prices do not include postage; American Dingley transmitter, type SCR578, 800 k/c, M.C.W.; Volgt speakers, complete with special corner cabinet; large stock electric exhaust fans, most types; Webster wire recorder, £28; Hallicrafter *Super Skyrider*, SX28 and SX72A in stock.
SERVICE RADIO SPARES, 4, Lisle St., W.C.2. Gerrard 1734. [0188

G. A. RYALL, "Utopia," Mayfield Rd., St Herse Bay, Kent, offer post-free barzains: meters, 2½in, 3½in overall, 0.50ma circular, flush, bolting through front flange, bakelite cased, 6/9 each, or best known make 8/9, or 2in best make 8/9, also 2in square front best make 0-5ma 6/9, and 2in square front 0-500v, 5ma, separate series resistance, price 6/9; metal boxes, size 8½×7¼, four fixing lugs, bench or wall fixing, paxolin lid, ¼in, exact fit, 6/9 complete; paxolin panels, 12×12, 1/8in, 6/10, or slightly soiled or marked, two for 5/10; miniature instrument switches, S.B., 2-p, six-way, 1/6 each; standard size Yaxley type 9w S.B., S.P., 1/6 each; ditto 2B, single-pole 6-way, 1/6 each; smaller type, 3-bank, 2-pole, 6-way, total five poles, only 2/- each; none soldered; one type switch, soldered with leads, 2-bank, 4-way, with five poles total, one double bank, 1/6 each; ditto 2-b., 3-p., 3-way, total six poles, with bakelite pointed knob, 1/6 each; all switches single-hole fixing. [0205

. . . Thank you for your letter of the 7th Nov. and the interest you have taken in my very small order. I shall find no difficulty in following your instructions for phasing the windings. I must say that I admire your arrangement which gives seven useful output impedances with only five secondary windings.
H. L. M. South Africa.

SAVAGE TRANSFORMERS OF DEVIZES LIMITED

SAVAGE TRANSFORMERS LTD.
Nurstead Road · Devizes · Wilts
Tel: Devizes 334

NEW S.T.C. SELENIUM RECTIFIERS. Largest L.T. range in Great Britain. Current products. NOT SURPLUS. E.H.T. H4/200 W.W. Televisor replaced by N2/100, 17/-; for VR97, N2/50 12/-. Post 6d.
Note increased Prices from 1st Jan. 1951.
HALF WAVE RECTIFIERS.
16v. 2a., 7/6; 1a, 9/2; 2a, 10/9; 3a, 17/6; all post 6d. 4a. 18/-; 6a., 23/9; post 10d. 30v. 1a., 13/6; 2a., 18/10; 4a., 28/-; 6a., 41/6; 40v. 1a., 17/10; 2a., 21/3; 4a., 40/6; 6a., 58/-; 100v. 2a., 39/6; 4a. 74/-; 6a., 108/-; all P. 1/-.
HALF WAVE HEAVY DUTY 7½in. SQUARE COOLING FINS.
16v. 5a., 34/3; 10a., 56/-; 20a., 48/6; 30v. 5a., 39/6; 8a., 43/6; 40v. 2.5a., 29/6; 5a., 54/3; 8a., 61/-; all post 1/-.
BRIDGE CONNECTED FULL WAVE.
17v. 1.25a., 13/9; 1.7a., 17/7; 2.5 a., 22/9; 3a., 24/9; 4a., 28/-; 5a., 29/6; all post free. 33v. 2a., 21/-; 1a., 24/3; 1.5a., 32/-; 2a., 35/-; 3a., 40/4; 4a., 48/-; 5a., 58/-; all post 10d. 54v., 1.5a., 44/-; 2a., 54/-; 3a., 61/-; 5a., 75/-; 72v., 1.5a., 57/-; 2a., 69/-; 5a., 98/-; 100v. 1.5a., 82/-; 2a., 100/-; 5a., 144/-; all P. 1/-.
BRIDGE CONNECTED HEAVY DUTY 7½in. SQUARE COOLING FINS.
17v. 6a., 38/10; 10a., 47/6; 12a., 82/-; 20a., 90/-; 33v., 6a., 73/-; 10a., 81/-; 12a., 142/-; 20a., 160/-; 54v. 6a., 102/-; 10a., 114/-; 72v. 6a., 132/-; 10a., 148/-; 100v. 10a., 215/-; all P. 1/6.
BRIDGE INDUSTRIAL FUNNEL COOLED. 17v. 12a., 86/-; 20a., 99/-; 30a., 140/-; 50a., 212/6; 33v. 6a., 79/-; 10a., 90/-; 12a., 142/-; 20a., 164/-; 54v. 6a., 104/-; 10a., 122/-; 72v. 6a., 130/-; 10a., 154/-; 100v. 6a., 180/-; 10a., 217/6; all post 1/6.
SLOW DELIVERY OF SOME RECTS. WILL DO OUR BEST!

Wholesale & Retail

T. W. PEARCE (Est. 19 yrs.)
66 GREAT PERCY STREET, LONDON, W.C.1
Off Pentonville Rd. Between King's Cross and Angel

JOHN FARMER

Inc. The Mail Order Dept. of the

MIDLAND INSTRUMENT CO.

TOGGLE SWITCHES, ref. 5D/531, 250 v. 2 amp., single hole panel mounting, s.p.c.o. or on/off, new boxed, 9d., post 3d., 7/6 doz., post 6d., 72/- gross, post 1/6. **ANTI-VIBRATION MOUNTINGS,** ref. 10A/7621, multi-spring, 10 lbs., anodised, new boxed, 9d., post 3d., set of 4 2/6, post 6d., 6/- doz., post 10d., 60/- gross, carriage 3/6. **ANTENNA RODS,** consists of three 4ft. tubular steel heavily copper-plated sections that screw into each other, total length 12ft., weight 11 oz., base ⅜in. dia. tapers to ¼in. dia., also makes a superb fishing rod, brand new, packed in cardboard tubes, 7/6, carriage 1/-, 3 for 20/-, carriage 1/6. **TELEPHONE SETS,** consists of 2 combined microphones and telephones, 100ft. P.V.C. covered telephone connecting wire, provides perfect 2-way communication, self-energised (sound power), no battery required, new boxed, 7/6, post 8d. ; ditto with 100 yds. connecting wire, 12/6, post 1/-. **CABLE,** rubber covered and braided maroon, 4-core, each 17/0076, 100-yd. coils, perfect stock, 80/-, carriage 3/6. **MOVING COIL HEADPHONES,** to which is also fitted a moving coil microphone, hand type with switch, new unused, 7/6, post 10d. ; ditto used otherwise in perfect order, 5/-, post 10d. **PYE TELEVISION I.F. STRIPS,** 45 mc/s., complete with 7 valves, EF50 (6) and EA50, new unused, 40/-, post 1/6. **VEEDER COUNTERS,** 0-9999, plated case enclosed, ¼in. dia. actuating shaft, 5/6, post 3d. **MAINS TRANSFORMERS,** input 200-220-240 v. 1-phase 50 cycles, tapped output giving 3-4-5-6-8-9-10-12-15-18-20-24-30 v. at 2 amps., brand new, boxed, with all termination data, 22/6, post 1/3. **POTENTIOMETERS,** Ohmite, Clarostat, etc., wire-wound on heating resisting former, 500 ohms 25 watts, 3/6, post 4d. **RADIO TRANSFORMERS,** drop through shrouded type, input 110-225-245 v. output 250-0-250 v. at 90 m/A., 5 v. 2 amp., 6.3 v. 3 amp., a first-grade trouble-free transformer, new boxed, 20/-, post 1/3. **BOWDEN DRIVE CABLE,** fine steel stranded, for radio tuning controls, pkts. of 10ft., 2/6, post 3d. **AIR POSITION INDICATORS, Mk. 1,** contains a wealth of gears, worms, silver-steel shafts, 3 infinitely variable ratio ball to disc mechanisms, 4 roller type counters each 0-9999, electric motor, lamps, switch, etc., etc., an ideal basis for making a mathematical calculator, in cases size 12in. x 7½in. x 5in., weight 17 lbs., 35/-, carriage 2/6. **ELECTRIC CLOCKS MARK 18.** Battery Time Switch Type will run for over a year from a 3-volt cycle battery. Jewelled lever movement 44 day and 24 hour setting dials also second hand enclosed in a brass and bakelite case, 3½in. diameter x 3in. ; new unused 30/-, post and packing 1/-. **LONDEX RELAYS TYPE 452,** 9-12 volt operation 150 ohms coil 2 pole robust contacts overall size 2½in. x 1¾in. x ⅝in. ; new boxed 2/6, post 4d. ; 24/- per dozen, post 1/-. **MOTOR ALTERNATORS** 230 volts, 50 cycles 1 phase 0.64 amps. continuous rating 2,880 R.P.M. Capacitator Motor. Fitted enclosed reduction drive gear box, final drive approximately 60 R.P.M. Motor is coupled to alternator 250 volts 1,250 cycles 0.24 amps. flexcitation 24 volts 0.4 amps. continuous rating ; size approximately 14½in. x 6in. dia-meter, standard motor base mounting, external wiring diagram, inside termination with cover plate ; perfect condition £3/10/-, carriage 7/6. **MODULATOR UNITS TYPE 149** contains C.V. 67 Klystron valve, 5 U4G Rectifier, E.F.50, B.4101 spark valve gap, 2 Selenium Rectifiers 250 volts, 100 milliamps, 3 neon lamps S.B.C. fitting complete with brass batten type holders, small motor with reduction gearing. Various oil-filled and paper condensers, 2 large transformers, also various potentiometers with extension couplers, resistors and many other incidentals in metal cases 18in. x 8½in. x 7½in. brand new unused and packed in wood cases ; special bargain offer 40/- carriage 7/6.

Send for our 20-page lists, also supplement direct to :

JOHN FARMER (DEPT. A.1.)
194 HARBORNE PARK RD., HARBORNE, B'HAM 17

Tel. : HARborne 1309

NOTICES

BRITISH SOUND RECORDING ASSOCIATION. MEMBERSHIP of the Association is essential to all actively engaged or keenly interested in high quality sound recording and reproduction. Additions have again been made to the publications of the Association. There are also the very special test discs. Full information is contained in the latest Publications List P.104. This, together with the new brochure giving full information of the work of the Association and the benefits conferred by membership; with a Membership Application, may be obtained from the Membership Secretary, Harrie J. King, 46, Mount View Rd., North Chingford, London, E.4. [0119

WANTED, EXCHANGE, ETC.

WANTED, Magnetophon Tone B, with spares (amplifier not required).—Box 2045. [0198

QUALITY amplifier, 8-12 watts, reasonable. —Park, 388, Stanley Rd., Liverpool, 20. [6854

WEARITE tape-deck urgently required any offer considered, top price paid.—Box 0747. [0761

WANTED, dynamometer, a.c. test set, also oscilloscope type 339A, also L050A oscillator. LESLIE DIXON & Co., 214, Queenstown Rd., Battersea, S.W.8. Macaulay 2159. [0176

WANTED, British, American radio magazines, books.—Preddle Pra, 101, Derby St., Bolton. [6805

QUANTITY Quartz Crystals wanted, 2-7-Mc/s on fundamental; price, quantity, sample.—Box 1285. [0810

WANTED, 2 mine detection kits, good condition.—Details to Icelandic Airlines, 15, Kingsway, London, W.C.2, or Tel. Tem. 7379. [6826

WANTED, 1,250ft reels American Audiotape No. 1251, in good condition.—Bradmatic, Ltd., Station Rd., Aston, Birmingham, 6. Tel. East 0574. [0225

WANTED HRO coils, Rx's, etc. AR88s, BC348s, 1277s, etc.—Details to R.T. & T. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0163

WANTED, laboratory test equipment including standard signal generator, watt meter, oscilloscope, bridges, recorders; send price and details to: HATFIELD INSTRUMENTS, 175, Uxbridge Rd., Hanwell, W.7. Tel. Ealing 0779. [0037

WANTED immediately, any quantity of C.V.128 or S.U.750 valves; must be new and in unused condition.—Write full particulars to Box 1333. [5897

WANTED, set manufacturers' or ex-Government radio equipment, large or small quantities of valves, electrolytics, speakers, meters, also components. LOWE BROS., 199, Mile End Rd., London, E.1. Ste. 2579. [6554

WANTED, RCA speech amplifiers type MI-11230 J or K.—Offers stating quantity and price, to PCA Radio, The Arches, Cambridge Grove, W.6. [0061

WANTED, all types of radio equipment, test instruments, radio receivers, personal sets, television, components, etc., etc.; call, write, send or 'phone. MILLER'S RADIO, 58a, Newport Court, Charing Cross Rd., London. [5211

WANTED, surplus relays, impulse switches, sparking plugs, 5-way, push-button units; any condition; large or small quantities; highest prices paid.—Box 4660. [5579

WANTED, 3 American C.R. tubes type 7FP7, 7FP5 or similar, new or used condition, good price paid.—Lawrences Liverpool, Ltd., 61, Byrom St., Liverpool, 3. [6876

WANTED, Antenna tuning units type BC-939-A and T-50 microphones and junction boxes JB-70-A.—PCA Radio, The Arches, Cambridge Grove, W.6. Tel. Riv. 3279. [0060

PRESTO recording turntable, 6N or 6D, required, any condition or incomplete.—All replies answered, details and lowest price to Archer, 82, Beechwood Ave., St. Albans, Herts. [6894

WANTED, BC-610 Hallicrafters transmitter, SX-28, AR-88, S-27; HRO receiver and spare parts for above; best price.—Write Box 964, c/o Ogilvy Service, 69, Fleet St., London, E.C.4. [0167

WANTED, new or nearly new receiver AR88D or AR88 LF, also frequency meter BC221, also radar scanning aerial, good prices paid.—Lawrences Liverpool, Ltd., 61, Byrom St., Liverpool, 3. [6877

WANTED, AN/APR-4 receiver, any units; any other good quality U.S. surplus radio and radar, tubes, test sets; laboratory equipment, etc.; give condition and price in first letter.—Littell, Parhills, Box 25, Dayton 9, Ohio, U.S.A. [6346

REPAIRS AND SERVICE

LOUDSPEAKERS repaired promptly.—Model Loudspeaker Service, 34a, Bullingdon Rd., Oxford. [6919

BAND SPREAD

by Armstrong

the *NEW* EXP 119



This model has been produced after exhaustive investigation into the requirements of Overseas Listeners. Ease of operation on the short-wave bands, high sensitivity and quality output have all been studied and incorporated in the EXP 119.

BRIEF SPECIFICATION

1. Designed specifically for the Overseas Listener.
2. 9 wave ranges. (6 bandspread and 3 general coverage) 11-570 metres.
3. High slope pentode R.F. stage.
4. 2 stages of I.F. amplification.
5. Variable selectivity.
6. Automatic noise limiter.
7. 10 watts push-pull output.
8. Separate A.C. power pack to facilitate operation from a vibrator if required.
9. 11 valve circuit (including cathode-ray tuning indicator).

The Armstrong range of chassis includes models from 7 to 14 valves.

Write now for catalogue.

Armstrong

THE CHASSIS PEOPLE

Armstrong Wireless & Television Co. Ltd. Warriters Road, Holloway, London, N.7.
Telephone: NORth 3213

SOLE BIRMINGHAM AGENT
Hayes Company,
1 Alcester Rd., Moseley, Birmingham, 13.

SOLE AGENTS FOR KENYA, UGANDA, TANGANYIKA & ZANZIBAR
Messrs. Jennings & Fox (Mombasa) Ltd. Kilindini Road, P.O. Box 56, Mombasa. Kenya.

THE
BRITISH NATIONAL
RADIO SCHOOL
ESTD. 1940

NOW IN OUR ELEVENTH
YEAR AND STILL

NO B.N.R.S. STUDENT HAS EVER FAILED

to pass his examination(s) after completing our appropriate study course!

NOTHING SUCCEEDS LIKE SUCCESS

and what we have done a thousand times already, for others, we can do again, for YOU!

A.M.Brit.I.R.E. and CITY and GUILDS Radio and Telecommunications Exams., etc., etc.

Six months' trial period without obligation to continue.

Please mention this advt. and send for free booklet to:—

STUDIES DIRECTOR
BRITISH NATIONAL RADIO SCHOOL
66, ADDISCOMBE ROAD, CROYDON
Phone: Addiscombe 3241

Cabinets of Distinction

Catalogue available on request.

Chassis

A.C., 5 valve 3 w/b Superhet Radiogram chassis. Absolutely complete kit of parts including wiring diagram . . . . £10 . 10 . 0

Or fully wired and tested . . . . . £12 . 5 . 0

Amplifiers

Four to fifteen watts output. Wired or in kit form from . . . . . £3 . 19 . 6

Full details of above available on request.

LEWIS RADIO CO.

(DEPT. 651), 322 HIGH ROAD, WOOD GREEN, LONDON, N.22.
Telephone - - - BOWes Park 5997.

REPAIRS AND SERVICE

THE Timing Division of CAMERER Cuss and Co., undertake the repair, calibration and, if required, National Physical Laboratory Certification of all types of STOP watches, chronographs, complicated watch mechanisms and TIMING devices. A comprehensive stock is also available, to suit every requirement. CAMERER CUSS & Co., 56, New Oxford St., London, W.C.1. Tel. Museum 4861. [6725

BERNARD'S.—New address (see below).

TELEVISION, radio and amplifier repairs, conversions and modifications; home-built receivers aligned; commercial radios rebuilt; send equipment with full instructions for quotation by return post; 12 months' guarantee on all work done. BERNARD'S, 12, St. Stephens House, Westminster Bridge, London, S.W.1. [0099

MAINS transformers rewound, new transformers to any specification. MOTOR rewinds and complete overhauls; first-class workmanship, fully guaranteed. P.M. ELECTRIC Co., Ltd., Potters Bldgs., Warser Gate, Nottingham. Est. 1917. Tel. 3855.

MAINS transformers rewound or constructed to any specification; prompt delivery.—Bede Transformer Co., Ltd., Bedeway, Bede Trading Estate, Jarrow. [3198

REPAIRS to moving coil speakers cones; coils fitted, field rewound or altered; speaker transformer, clock coils rewound; guaranteed satisfaction, prompt service. L.S. REPAIR SERVICE, 49, Trinity Rd., Upper Tooting, London, S.W.17. Balham 2359. [0110

AIRH rewinds, no delay transformers, mains, TV, output, chokes, also to your specification; vacuum impregnation, interleaving, new tag panels; our aim—your satisfaction. AIRH & Co., Ltd., Vanguard Works, Poole, Dorset [6573

REPAIRS.—E.H.T., mains and O.P. transformers, field coils and chokes; also armatures and motors; new transformers designed to any specification; all work fully guaranteed. WILLESDEN TRANSFORMER Co., Ltd., 20a, Church Lane, Church Rd., N.W.10.

RADIO MAINTENANCE SERVICE for guaranteed rewinds and repairs; armatures, P.H.P. motors, vac. units, portable tools, etc.; good deliveries.—139, Goldhurst Terrace, N.W.6. Mal. 6133. [9925

"SERVICE with a smile."—Repairers of all types of British and American receivers; coil rewinds; American valves, spares, line cord. F.R.I., Ltd., 22, Howland St., W.1. Museum 5675. [0112

ELECTRICAL measuring instruments of every make, multi or single range, repaired and standardised; prompt attention.—The Electrical Instrument Repair Service, 329, Kilburn Lane, London, W.9. Tel. Led 4168. [3715

REWINDS and conversions to mains and output trans., pick-ups, fields, clock coils, chokes, etc. from 4/6, p.p. equipment a speciality, all work guaranteed.—N.L. Rewinds, 29, Blackbird Hill, N.W.9. Tel. Wordsworth 7791. [6895

24-HOUR service. 6 months' guarantee, any transformer rewind, mains outputs and L.T.s., etc.; all types of new transf., etc., supplied to specification; business heading or service card for trade prices.—Majestic Winding Co., 180, Windham Rd., Bournemouth. [6520

METROPOLITAN RADIO SERVICE for rewinds mains and E.H.T. transformers, chokes and field coils; new transformers designed and manufactured singly or in quantities.—Metropolitan Radio Service Company, 1,021, Finchley Rd., London, N.W.11. Tel. Speedwell 3000. [0150

WORK WANTED

RF coilwinding capacity available.—Bel sound Products Co., Marlborough Yard, London, N.19. [0185

WINDING and light assembly capacity available.—Competitive quotes from Labgear, Ltd., Cambridge. [6526

DRAUGHTING, tracing and photoprinting services; estimates free; contractors to the Ministry of Supply and the Admiralty for drawing and tracing work to their requirements and specifications; sub-contracting work of this nature undertaken. DRAWING & TRACING, Ltd., 456a, Ewell Rd., Tolworth, Surbiton. Tel. Elmbridge 7406. [5975

J. MORT, B.Sc., A.M.I.E.E., offers to the trade and amateur a service of technical advice, design and construction of special test gear, receivers and other apparatus, including correction of faults in home-built apparatus.—J. Mort, BCM/HIFIDEL, W.C.1. [5752

SOLVE your staff problem by letting us produce your radio or electrical assemblies and developments of any type of electronic apparatus; our machine shop and tool room also at your disposal for small or large runs, highly skilled staff; we collect and deliver if desired.—Box 0098.

MISCELLANEOUS

WALNUT radiogram cabinets, stamp leaflets.—Cabinetware, 1a, Heyes St., Blackburn.

1944-49 issues of "Wireless World."—Offers to Plant, 110, Cobden Ave., Peterborough. [6900

THE HOUSE FOR QUICK DELIVERY

The following Goods Ex Stock. Cash with Order, or C.O.D.

PLESSEY Single Record Player, complete with Pick-up. Limited quantity £6 16 2

LEAK TL/12 Watt Loop Feedback Amplifier £25 15 0

LEAK RC/PA/U Pre-amplifier £8 15 0

CHARLES Concert Master £29 10 0

CHARLES K51 Amplifier..... £18 18 0

ROMAC 25 watt Amplifier. A.C. mains, mic and Gram inputs. Brand new. A real bargain £18 15 0

ROMAC Record Player, A.C. mains, complete with all connectors in special metal carrying case. Garrard S. unit fitted £9 15 0

MARCONIPHONE Model 14. Light Weight Pick-up, including Purchase Tax ... £2 11 8

ACOS Pick-up Head G.P.19..... £2 3 4

Send me your order for all your :—

Wharfedale speakers. Test meters—Avo, Taylor, Advance. Valves. Components.

Please note : These prices are subject to any increases by the makers due to rise in costs.

A. ERNEST BUCHAN
(M.O. Dept.)
28, BELMONT ST., ABERDEEN
Telephone 23579

WANTED

End equipment, tubes and component parts.

Will pay highest prices.

END EQUIPMENT

APN-9	HS-23
ARC-1	T-17D
APN-4	American made ARC-3
SCR-522	R-5A/ARN-7
BC-640	BC-453
ART-13	SCR-720
BC-639	APR-4
BC-221	AT-4/ARN-1 Antenna
RTA-1B	TN-16, 17, 18, 19 and 54
HS-33	

TEST EQUIPMENT

TS-13	TS-174
TS-34	TS-182
TS-35	TS-203
TS-45	TS-235
TS-70	TS-251
TS-89	TS-270
TS-118	TS-263
TS-120	TS-268
TS-142	IE-19

ARROW SALES, INC.
1712 S. MICHIGAN AVENUE, CHICAGO 16, ILL., U.S.A.
Phone : WEbster 9-7454

THE NEW 1355 CONVERSION data for all five TV channels. ONLY 3/-.

RECEIVER 1225. Complete with 5 EF50s, 2 EF39s, 1 EB34, these operate on four pre-set frequencies and are ideal for "2." OUR PRICE 39/6.

POWER UNIT 532 contains 5Z4G rectifier, SU2150 (5KV) EHT rectifier, two high cycle transformers, choke, relay, three condensers, etc. 17/6.

LAYER BUILT BATTERIES, 150 v. and 3 v., combined. 6/6.

2 v. MIDGET ACCUMULATORS, 3 AH, brand new. ONLY 2/9.

POWER UNIT 5441B. Separate individually controlled H.T. and L.T. transformers, jewelled indicator lights, attractive grey crackle case, and modest size (14in. x 7½in. x 7in.), 300 v. at 200 mA fully smoothed, 12 v. at 3 a. A.C. and 5 v. D.C., make this one of to-day's best bargains. ONLY 65/-.

AMPLIFIER 1135A with EBC33, EK32 and EL32; our "10 min. conversion" data and circuit, provided with the unit, will turn this into a really fine little amplifier. Inputs for mike or gram. OUR PRICE 16/6.

MAINS POWER PACK KIT. Suitable for the above, with our improved conversion data. 19/6.

RECEIVER P40. Covering 85-95 mc/s, these may be converted for "2" or for the B.B.C. U.H.F. F.M. Crystal controlled oscillator with subsequent multiplication ensures stability. With 4 EF54s (RF, mixer and multiplier), EC32 (L.O.), 2 EF39s (2.9 mc/s IFs), EB34 (det.) and 6J5 and 6V6 (audio), they are housed in robust attractive grey cases. ONLY 65/- in original cartons.

VIBRATOR 21. 6 v. input, approx. 160 v. at 40 mA. output, these were designed to supply the receiver 21 and its associated transmitter. 15/6.

TRANSMITTER 21. The remaining section of the above, this will send CW, MCW or speech on the same frequencies as the receiver. Complete with valves, control box, key front panel (for mounting all three sections together) and circuit. PA coils and relays stripped by M.O.S. In excellent condition. 25/-.

RECEIVER 3547. With 15 EF50s, eight other useful valves and hundreds of components, this contains a "Pye 45 mc/s Strip" which is ideal for London TV. Brand new in original Maker's Crates. ONLY £6.

ACCUMULATORS. Brand new, multi-plate, in unspillable celluloid cases (3½in. x 1¼in. x 4in.); 7 A.H. 2 v. 5/11.

Ex-U.S. BLOWERS. Ideal for cooling purposes, or as small motors; 1¾in. dia. x 2¼in. long, they require 24/28 v. A.C. or D.C. 9/6.

RADIO EXCHANGE CO.,

9, Cauldwell Street,
BEDFORD. Phone 5548.

MISCELLANEOUS

WALNUT radiogram cabinets, stamp details.—E. Wisker, 501, Hale End Rd., Highams Park, E.4. [6804

SALE, 40 Proc. I.R.E., September, 1947, to December, 1950; what offers?—54, Gatis St., Wolverhampton. [6819

FOR sale, 13 bound volumes "Wireless World," July, '32-Dec., '38.—Preston, 23, Southway, N. Harrow, Middx. [6821

WALNUT radiogram and television cabinets, sample designs, few only; stamp details.—Shaw, 69, Fairlop Rd., Leytonstone, E.11. [6818

ELECTRONIC organ construction data, component values, practical layout, etc.; further details.—C.S. Co., 10, Duke St., Darlington.

FLEX, super quality, aero intercom. leads containing 4 lengths approx. 24ft., 2 screened, 2/- each, 5 for 10/-, post free.—L.T.D., Ltd., Bromyhurst, Barton Rd., Urmston. [6879

ALUMINIUM alloy tubing 1¾in×1⅝in. aluminium alloy strip 4¾in×¼in. 3/- and 8d per ft respectively; buy now: large and small orders accepted while stock lasts.—The L.A.C. Co., 11, Bank Parade, Burnley. [6929

ALLSCREWS, Ltd., for B.A. screws, nuts, washers, studding, grub-screws, bolts, soldering tags, woodscrews, etc., plain or nickel or cadmium plated, one-gross packets or large quantities; stamp for lists.—270a, King St., Hammersmith, W.6. Riv. 7762. [5426

ENGRAVING, amateurs and trade could take the opportunity of engraving problems in the future by getting in touch with A. C. Engraving, 19a, Windmill Rd., London, S.W.16. Brass, bronze, erinoid, perspex dials; one knob or repetition equally entertained. [0034

COPPER wires enamelled, tinned, Lits, cotton, silk covered, all gauges; B.A. screws, nuts, washers, soldering tags, eyelets; ebonite and laminated bakelite panels, tubes, coil formers; Tufnol rod; headphones, wexes, etc.; latest radio publications, full range available; list, s.a.e.; trade supplied.—Post Radio Supplies, 33, Bourne Gardens, London, E.4. [0136

CABINET designs.—Why buy a cabinet when you can make a first-class walnut or mahogany veneered or hardwood cabinet yourself at a fraction of the cost? We supply detailed drawings and instructions for easily constructed well-designed radio and television cabinets (including "Viewmaster"). All designs readily lend themselves to modification if necessary to suit most types of chassis. Send for illustrated catalogue.
CHAFFEY-CONSOLE, 6, Sefton Rd., Petts Wood, Kent. [6880

OSCILLOSCOPE cabinets, 11×9×6¼ complete with chassis containing support and holder for V.C.R.139 C.R. tube, 2 potentiometers, various resistors, etc., the cabinet has hinged viewing hood with plate glass window; supplied with full conversion data, 12/6 each plus 2/- postage; also (new) black crackle, similar to above, complete with support and base for V.C.R.139 tube but less pots and resistors, 17/6 each plus 2/- postage.
TELEKIT SUPPLY COMPANY, 51, Addington Rd., West Wickham, Kent. [6926

ELECTRIC clocks, 200/250v AC, brand new, 27/6; mercury vapour rectifiers, 1,000v, 600ma, 4v heater, 8/9; fuse boxes, to hold 6 pairs of fuses, with set of spare fuses, with 5, 10 or 15amp, 8/9; back copies of "Wireless World" sent to anybody, 2/6; car battery chargers, 6v, lamp, for 200/250v a.c., complete with clips, fuse, pilot lamp, 34/9.—Maiden Transformer Supplies, 200, Cambridge Rd., Kingston-upon-Thames. [0136

STEEL instrument cases with front panel and chassis built as one unit, unique construction includes clip-on aluminium chassis top easily detached for valve hole cutting, etc., and cheaply replaceable in case of rebuild; the cabinet has perforated rear and base panels for improved ventilation and the assembly is finished in handsome black, grey or blue crackle; type A 12in×8in×8in with 2¾in chassis depth, 37/6, post paid; type B 14in×9in×8in with hinged top, chassis depth 3½in, 47/6, post paid; special size to order, s.a.e. please with enquiries. Steel-framed chassis with aluminium top, a really first-class job of exceptional rigidity and pleasing stove enamelled finish: 8in×4in×2in 4/9, 9in×6in×3in 5/9, 10in×6in×3in 7/6; 14in×10in×3in 8/9, 18in×9in×3in 11/6; other sizes prices in proportion.
METALECTRIX, 39, Lowesmoor, Worcester. [6230

SITUATIONS VACANT

GOVERNMENT Department situated in North Bucks has the following vacancies:—
1.—Telegraph Engineer required to assist in the development, prototype production and test of telegraph apparatus; applicants should have had experience of modern telegraph and electronic equipment.
2.—Coil Winder, experienced in the winding of radio coils and transformers; a knowledge of impregnation methods would be an advantage.
WRITE T.E.C., c/o Box 1297. [6881

ELECTRICAL Tester required; preference given to man with experience of high frequency generators as used for high frequency heating.
APPLY: Applied High Frequency, Ltd., 52a, Goldhawk Rd., London, W.12. [6806

FROM THE FOUR CORNERS

Looking through some of our records recently we counted 23 countries in 5 continents where our speakers are to be found. Outside the British Isles the U.S.A. is our largest customer, followed by South Africa, Sweden, Canada, Australia.

From nearly every one of these 23 places we have received appreciation of the quality of our product. Here are half-a-dozen:

"The speaker is everything you claim it to be and I am very satisfied with its performance." (Canada.)

"I find the standard of reproduction quite up to my high expectations. Flesh and Blood radio programmes are astonishingly good." (New Zealand.)

"The members of the Ancon Club ask us to inform you that your speakers surpass anything hitherto available to them, surpassing all expectations." (Ecuador.)

"The Barker is the finest domestic speaker I have ever heard." (Australia.)

"It is far more natural, pleasing, and satisfying than much more costly dual combinations which are widely advertised over here." (U.S.A.)

"I cannot praise too highly its excellent transient response." (U.S.A.)

"Your speaker is damn good!" (S. Africa.)

IF YOU SEEK GOOD SOUND, SEND FOR DETAILS TO:

BARKER NATURAL REPRODUCERS,
BCM/AADU, LONDON, W.C. 1.

JEWEL NEEDLES

★ **SAPPHIRE 9/11** including tax.
GEMTIPT straight and trailer for crystal and magnetic pick-ups. SAPPHIRE STYLUS for light weight pick-ups.

★ **DIAMOND 7 gns.** plus 62/11 tax.
To fit most light weight pick-ups.
Pick-ups with removable armatures or fixed point, fitted at £7.12.11 plus £5/11 tax; L.P. at £8.14.11 plus 74/11 tax.

These unique needles are unimpaired by years of use. 90 times harder than sapphire and more shock-proof.

STARR NEEDLES are stocked by Webb's Radios Keith Prowse and other good dealers. In cases of difficulty write direct.

BRITISH STARR PRODUCTS
8 DARTMOUTH PARK AVENUE,
LONDON, N.W.5
Export Enquiries :
General & Overseas Trading Corp., Ltd.,
6 Duke Street, St. James's, London, S.W.1

TESTOSCOPE *Mains Tester*

For high & low voltage testing :—
1/30 & 100/850 volts A.C. or D.C. Write for interesting leaflet 30F.

RUNBAKEN - MANCHESTER 1

CHASSIS



HAYES RG/150 RADIOGRAM CHASSIS. The demand for this attractive and popular chassis increases month by month. The total price of £13/7/6 includes an 8in. loudspeaker, representing real value-for-money in these days of rising prices. A 10in. L.S. can be supplied at a slight extra cost. Fully guaranteed for one year. Full details will gladly be sent you by return of post.

ARMSTRONG CHASSIS. We hold the largest stocks of Armstrong chassis in the Midlands, and are the sole Birmingham agents. The full range as shown on page 89 can be seen and heard in our showroom. Open all day 5 sts.

THE HAYES COMPANY
1 ALCESTER RD., MOSELEY, BIRMINGHAM 13
Phone : SOUTH 0202

SITUATIONS VACANT

CROWN Agents for the Colonies.

INSPECTOR of Police required by the Government of Uganda for 30 to 36 months in the first instance with prospect of permanency for general police duties and particularly Signal Section duties; commencing salary according to age and experience in the scale £490, rising to £715 a year; outfit allowance, £50; uniform allowance, £10 a year; free passages and liberal leave; candidates (aged 21-27 years), preferably unmarried, not below 5ft 8in in height, of good physique and secondary school education up to School Certificate standard, must have been employed as an instrument mechanic (radio) or electrician (radio)) or foreman of signals (military); have had extensive practical experience in benchwork and general use of tools; and have a sound practical knowledge of the construction, operation and maintenance of modern H.F. and V.H.F. transmitters and receivers of low and medium power; experience in battery charging and maintenance; and practical mechanical knowledge of petrol engines used for battery-charging plants is also necessary.—Apply at once by letter, stating age, full names in block letters, and full particulars of qualifications and experience, and mentioning this paper to the Crown Agents for the Colonies, 4, Millbank, London, S.W.1, quoting M.26418.B. on both letter and envelope. The Crown Agents cannot undertake to acknowledge all applications and will communicate only with applicants selected for further consideration. [6817

URGENTLY required by Airtech, Ltd, Aylesbury & Thame Airport, Haddenham, Bucks:—
RADIO and radar mechanics for installation and overhaul work on interesting new project, must be highly skilled and able to work with minimum supervision, rates of pay in accordance with qualifications and past experience. 44-hour (5-day) week.—Apply in complete confidence, giving fullest details of experience, age and date available to Personnel Superintendent. [6866

ELECTRONICS development assistant, salary £400-£500 a year according to experience and qualifications.
ELCONTROL, Ltd., 28a, Tilehouse St., Hitchin. Tel. Hitchin 1588. [6815

EXPERIENCED radio and television engineer required.—Edwin P. Fox, Murphy Dealer, East Molesey, Surrey. [6857

APPLICATIONS invited by a rapidly expanding organisation situated at Ryde, Southampton, for the undermentioned positions.
(a) SENIOR development engineers with several years experience in research and/or development and design of light engineering, electronic and mechanical projects, such as magnetic recording, telecommunications, audio frequency equipment, etc., for work on interesting new projects, with experience in the supervision of a small group. Degree desirable.
(b) JUNIOR engineers (electrical and mechanical) with experience in design and development of prototypes connected with above projects, preferably with Higher National Certificate.
(c) PRODUCTION manager with experience in assembly of light electrical and mechanical apparatus, covering a wide variety of products, used to the control of mixed labour, engagement of staff, etc.
(d) DRAUGHTSMEN accustomed to the design, detailing and layout of electronic and small mechanical parts.
(e) INSTRUMENT makers for model room, thoroughly experienced in the make up of samples and prototypes from drawings in the initial stages of development.
APPLICATIONS to be made in writing. Please give full details of experience in chronological order, salary desired and age in the first instance to Box 1296. [6882

RADIO testers required, N.W.1; experience R. Services test gear, radar, radio test gear; age, experience, wages required.—Box 1359. [6905

FERRANTI, Limited, Moston Works, Manchester, have staff vacancies in connection with long-term development work on an important radio tele-control project.
(i) SENIOR engineers or scientists to take charge of research and development sections. Qualifications include a good degree in physics or electrical engineering and extensive past experience in charge of development work. Salary according to qualifications and experience in the range of £1,000-£1,500 per annum. Please quote reference R.T.E.
(ii) ENGINEERS and scientists for research and development work in the following fields: radar, radio and electronic circuits, micro waves, high power centimetric valves, vacuum and/or high voltage techniques, servo control and electro-mechanical devices. Qualifications include a good degree in physics or electrical engineering or mechanical science, or equivalent qualifications. Previous experience is an advantage but is not essential. Salary according to qualifications and experience in the range £420—£1,000 per annum. Please quote reference R.T.E.
(iii) TECHNICAL assistants for experimental work in the fields listed in (ii) above. Qualifications required: a degree or higher national certificate in electrical or mechanical engineering or equivalent qualifications. Salary in the range of £260—£550 according to age and experience. Please quote reference R.T.A
THE Company has a staff pension scheme, and will give housing assistance in special cases.—Application forms from Mr. R. J. Hebbert, Staff Manager, Ferranti, Limited, Hollinwood, Lancs.

SUCCESSFUL SALES! **SATISFIED CUSTOMERS!**

Pennine RADIO

THE ALL SEASON SENSATION. ACCLAIMED THE COUNTRY OVER. THE INTIMATE RECEIVER WHICH COMBINES APPEARANCE AND PERFORMANCE. HOUSED IN A BEAUTIFUL WALNUT CABINET. EACH SET FULLY GUARANTEED.

HEIGHT 10", WIDTH 12½", DEPTH 5½"
4 Valve SUPERHET

THE SET THAT SELLS ITSELF

UNBEATABLE VALUE
£12 15 2
INC. TAX.

"THE ROVER"
SUPPLIED ONLY THROUGH SELECTED WHOLESALERS. ILLUSTRATED LEAFLETS AND ATTRACTIVE DISPLAY CARDS.

PENNINE AMPLIFIERS
ELLAND YORKS ENGLAND
TEL. ELLAND 2107

ELECTRONICS
DUPLEY
LTD.
CRANMER AV. EALING. W 13.
Transformer and Coil Manufacturers to the Trade
Telephone: EALing 5588

NOW AVAILABLE

GERMANIUM CRYSTAL DIODES

LATEST, SMALLEST, SUPREME CRYSTAL DETECTOR.
Midget Size, 5/16in. x 3/16in.
Wire Ends for Easy Fixing.
4/6 each, postage 2½d.
Technical Details and Selected Types available.

SILICON DIODES, 3/6. Postage 2½d.
Fixing Brackets, 3d. pair.

COPPER INSTRUMENT WIRE
ENAMELLED, TINNED, LITZ, COTTON AND SILK COVERED.
Most gauges available.
B.A. SCREWS, NUTS, WASHERS, soldering tags, eyelets and rivets.
EBONITE AND BAKELITE PANELS, TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES, ALL DIAMETERS.

Latest Radio Publications.
SEND STAMP FOR LISTS.
TRADE SUPPLIED.

POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4

THE MODERN BOOK CO.

Television Receiving Equipment. By W. T. Cocking. 18s. Postage 9d.

The Radio Amateur's Handbook—1951 Edition. By A. R. R. L. 22s. 6d. Postage 1/-.

Radio Circuits. By W. E. Miller. 5s. Postage 4d.

Radio Servicing—Theory and Practice. By Abraham Marcus. 35s. Postage 1s.

Radio Technology. By B. F. Weller. 30s. Postage 10d.

Radio Engineers' Handbook. By F. E. Terman. 50s. Postage 10d.

Time Bases. By O. S. Puckle. 30s. Postage 10d.

Radio Engineering. By F. E. Terman. 50s. Postage 10d.

R.C.A. Receiving Tube Manual. 4s. 6d. Postage 6d.

Mullard's Valve and Service Reference Manual 1951. 8s. Postage 4d.

Modern Valve Comparison Manual. 3s. Postage 2d.

Radio Receiver Design. By K. R. Sturley—2 volumes. 28s. each. Postage 1s.

Radio Laboratory Handbook. By M. G. Scroggie. 15s. Postage 6d.

Wireless Servicing Manual. By W. T. Cocking. 12s. 6d. Postage 6d.

Practical Wireless Encyclopaedia. By F. J. Camm. 21s. Postage 10d.

We have the finest selection of British and American radio books in the country. Complete lists on application.

19-23 PRAED STREET
(Dept. W.6)
LONDON, W.2
PADdington 4185

More British Bargains

DYNAMOS. Suitable for adapting as Wind Chargers. 12 volts 10/15 amps. 1,400 r.p.m., totally enclosed 50/-, carr. 5/-. Small 6 volt 5 amp. D.C. Hand Generators, speed approx. 100 r.p.m., 25/-. Handle could be removed to fit prop. for wind charging. Heavy duty Dynamos 12 volts 50 amps. speed 2,500 r.p.m., 90/-, carr. 5/-. 50/70 volt Charging Dynamo 25 amps. 2,500 r.p.m. £20.

MOTOR PUMPS. Stuart Turner No. 10, new. 230 volt A.C. Lift 3ft., head 10ft., capacity 100 g.p.h., £6/10. No. 12, new, £9/10. Foot valve and strainer, 27/6 extra. 12 volt D.C. Stuart Motor Pump No. 10 for caravan or Motor Boat, £6/10.

RESISTANCES. Variable wire-wound, double tube, 152 ohms 2 amps., new, 30/-. Single tube, 5 ohms 10 amps., 21/-; 300 ohms ½ amp., 15/-. Small rotary, 10 ohms 1 amp., 2/6, post 6d.

MOTOR BLOWERS. 24 volt D.C. Keith Blackman 5in. inlet and 5in. outlet 65/-, carr. 5/-. 200/225 volt A.C. 50 c/s. Motor Blower 40 cubic feet per min. 10in. water gauge, £14/10, carriage extra.

AIR COMPRESSORS, new, 4 cubic feet, single stage, vertical, £15, carriage extra.

FANS. 380/400 volt 3-phase 50 c/s. 6.7 amp. 24in. blade, speed 700 r.p.m., £17/10. Few large D.C. Models also in stock.

TRANSFORMERS. 3½ K.V.A. Hermetically sealed in metal case. Primary 10-0-200-240 volts 50 c/s., secondary 3,400-0-3,400 volts 1.4 amps. with terminal plate and insulators for H.V. output. 10 K.V.A. Primary 230 volts 50 c/s., secondary 115 volts. Double wound, air cooled, in steel case. 4.75 K.V.A. Primary 110 volts 50 c/s., secondary 230 volts. Double wound air cooled.

Send for Transformer list.

ELECTRADIX RADIOS

214 Queenstown Road, London, S.W.8.
Telephone : MACauley 2159

SITUATIONS VACANT

MIDLANDS ELECTRICITY BOARD.

APPOINTMENT of General Assistant Engineer. APPLICATIONS are invited for the position of General Assistant Engineer in the Chief Engineer's Department. The successful applicant will operate from Aston Fields Depot, Bromsgrove. APPLICANTS should have had considerable experience in the operation and maintenance of V.H.F. radio and radar equipment, and a knowledge of maintenance of wired telecommunication equipment is also desirable. The successful applicant will be required to maintain equipment of this type installed in vehicles and fixed stations throughout the area.
THE conditions of service will be in accordance with the National Joint Board Agreement and the salary, subject to negotiation, will be Schedule "C," Grade 8, Class AX/DX £437/£622 per annum the commencing figure being determined according to qualifications and experience.
APPLICATIONS stating age, experience and qualifications should be made within 14 days to:—"The Secretary (Ref. FWC), Midlands Electricity Board, Board Headquarters, Mucklow Hill, Halesowen, nr. Birmingham.
A. STEPHENS, *Secretary.* 11th April, 1951. [6847

BERRY'S (SHORT WAVE), Ltd., have vacancies for counter sales assistants, good radio knowledge essential.—25, High Holborn, W.C.1. [6748

TELEVISION service engineers required N. London, only first-class men apply please; preference given to drivers.—Write Greystone Television Service, Ltd., 256, Bishopsgate, E.C.2. [6868

SERVICE mechanic required by leading hearing aid manufacturers for West End office, good prospects and permanency for good man.—Write Box W.W. 815, at 191, Gresham House, E.C.2. [6850

WANTED, competent engineer, familiar with use of telemetry in the field; salary £500/£700 p.a. according to experience.—Please write, giving full details, and quoting ref. HHE to Box 1293. [6838

COMMUNICATIONS receivers; vacancies for skilled engineers having previous experience in this field.—"Q-Max" (Electronics), Ltd., 95, Villiers Rd., N.W.2 (Nr. Willesden Bus Garage). [6747

E. K. COLE, Ltd. (Malmesbury Division) invite applications from electric engineers for permanent posts in development laboratories engaged on long-term projects involving the following techniques:—
1. PULSE Generation and Transmission.
2. SERVO Mechanisms.
3. CENTRIMETRIC and V.H.F. Systems.
4. VIDEO and Feedback Amplifiers.
5. V.H.F. Transmission and Reception.
6. ELECTRONICS as applied to Atomic Physics.
THERE are vacancies in the senior engineer, engineers and junior grades; candidates should have had at least 5 years' industrial experience in the above types of work, together with educational qualifications equivalent to A.M.I.E.E. examination standard. Commencing salary and status will be commensurate with qualification and experience; excellent opportunities for advancement are offered with entry into a pension scheme after a period of service; forms of application may be obtained from—Personnel Manager, Ekco Works, Malmesbury, Wilts.

EXPERIENCED electrical testers and inspectors required for a factory in Harrow area; applicants should have sound theoretical knowledge of valve amplifiers; salary dependent on ability and experience.—Box 1294. [6849

VACANCY exists for radio engineer holding current overhaul licence for maintenance and overhaul of aircraft radio and radar installations, should be experienced on A.S.V., T.R. 1145, T.1155 and T.R.1464 equipment.
APPLICATION to be made in writing to—Technical Manager, Aquila Airways, Ltd., Hamble, Nr. Southampton. [6738

PYE, Ltd., require senior or junior development engineer, experience on development of domestic radio receivers essential.—Write stating details of qualifications, salary, etc., to Personnel Manager, Radio Works, Cambridge. [6385

ELECTRONIC Engineer required by capacitor manufacturers (E. London) for development work on test instruments and electrical research; opportunity for young engineer with some years' experience.—Write Box 1282. [6608

SEVERAL Radio and Radar Engineers and Mechanics required urgently for factory in Peckham area; knowledge of American equipment an asset; also several vacancies for Radio Storekeepers and Radio Salesmen; applications specifying experience and qualifications in strict confidence to—Box 1359 [6910

LIBRARIAN required for E.M.I. Technical Library; qualifications: Good general scientific background with practical experience, preferably in the field of light electrical engineering, coupled with a keen interest in librarianship, though actual experience of this work is not essential; knowledge of technical German and French would be an advantage; age over 24 years.—Please write, giving full details of experience and salary required, etc., to ED/36, E.M.I. Engineering Development, Ltd., Blyth Rd., Hayes, Middx. [6811

ALEC Davis SUPPLIES Ltd

DEPT. W.W. 18 TOTTENHAM CT. RD
LONDON, W.1. MUSeum 4539/2453

THE WELL KNOWN "PTE" 45 MC/S. I.F. STRIP. Ideal for T/V. after a few modifications. Price 35/-, plus 1/- for carriage.

INDICATOR UNIT TYPE 62. Contains VCR97 C.R.T., 16 VR65's, 2 VR54's, 2 VR92. Xtal Unit and a host of components. 60/-, plus 7/6 carriage.

INDICATOR UNIT TYPE 6. Contains VCR97 C.R.T. 4 EF50, 3 EB34 valves and a good selection of components. Readily converted to an Oscilloscope. Price 70/-, plus 7/6 for carriage.

INEXPENSIVE TELEVISION BOOKLET. Price 2/6 plus 3d. postage.

HIGH VOLTAGE CONDENSER. Ideal for T/V. 0.5 mfd. 3,500 v. D.C. Price 4/-, plus 6d. postage.

RECEIVER TYPE R.1355. Contains 9 VR65, 1 2C40, 1 VU120, valves, Condensers, Resistors, etc., etc. Price 50/-, plus 5/- carriage.

R.1355 MAINS TRANSFORMER. 200/250 Pri. Sec. 350-0-350 at 120 M/A 6.3 v. 7 A., 5 v. 3 A. Price 28/6, plus 1/- postage.

MAINS TRANSFORMERS.
Pri. 200/250 v. Sec. 280-0-250 v. 60 M/A. 6.3 v. 3 A., 5 v. 2 A., 21/-, plus 1/- postage.
Pri. 200/250 v. Sec. 350-0-350 v. 80 M/A. 6.3 v. 3 A., 5 v. 2 A., 27/6, plus 1/- postage.
Pri. 200/250 v. Sec. 350-0-350 v. 120 M/A. 6.3 v. 3 A., 5 v. 3 A., 37/6, plus 1/- postage.

L.F. CHOKES.

10H	75 M/A. 150Ω	Resistance ..	5/6
10H	80 M/A. 300Ω	.. ..	9/6
10H	100 M/A. 500Ω	.. ..	10/6
10H	150 M/A. 800Ω	.. ..	19/9
50H	20 M/A. 1,000Ω	.. ..	5/3
90H	20 M/A. 1,000Ω	.. ..	5/9

All Post 9d. extra.

R.1155 RECEIVER. Covering 200/75 KC/S. 500/200 KC/S. 1,500/600 KC/S. 7.5-3.0 MC/S. 18-7.5 MC/S. Ideal Communication or Domestic Receiver. Price 29/9/-, plus 10/- carriage.
Kit of parts for Power Supply and Output Stage for the R.1155 as above, 23/17/6, plus 1/- for carriage and packing.

BAKELITE ENGRAVED CONTROL KNOBS. 1¼in. base—brown or ivory. Bass, Treble Tone, Vol on/off. Volume, Brilliance, on/off, Brilliance on/off, Contrast, Focus, Radio/Gram., Tuning, Wavechange. Price 1/6 each, plus 3d. for postage and packing.

FIRST MIDGET COIL-PACKS. Short and Medium Wave Dust Cored Coils. Only 19/6, plus 1/- for post.

STEEL AMPLIFIER CHASSIS & CABINET & PANELS. 10in. x 7½in. Depth 6in. Chassis drilled for 4 valves and two condensers. Price 25/-, plus 1/- postage.

"DEKKO" ALIGNMENT OSCILLATOR D.A.O.1. This unit provides a Modulated signal for the alignment of I.F. Amplifiers etc. The two standard frequencies of 465 KC/S and 1.6 MC/S are selected by the turn of the switch. Price 47/6, plus 1/- postage.

ACOS GP20 MICROCELL PICK-UP. Complete with Standard head, 23/11/5. L.P. head available 42/3/4 extra. Postage and packing 1/-.

FULL MAIL ORDER FACILITIES
Shop Hours: Monday-Friday 9-6.30 p.m. Sats. 9-1.

YOUR METER DAMAGED?

Leading Electrical Instrument Repairers to the Industry.

Repairs by skilled craftsmen to all makes and types of Voltmeters, Ammeters, Microammeters, Multirange Test meters, Electrical Thermometers, Recording Instruments, Synchronous Clocks, etc. Quick deliveries—for speedy estimate send defective instrument by registered post to:—

L. GLASER
Electrical Instrument Repairers
341 CITY ROAD, E.C.1
Tel. Terminus 2489

SOUTHERN RADIO'S WIRELESS BARGAINS

WALKIE-TALKIE (TRANSMITTER-RECEIVER). Type 38 Mark II. Complete with 5 valves, Throat Microphone, Headphones and Aerial. 7 mc/s. Amateur Band suitable for field use. Powerful Superhet Receiver. Modulated Transmitter. Guaranteed ready for the Air, less batteries, £3/10/-.

R.3515 TELEVISION UNITS. Complete with 21 valves. 6 Stage 14 mc/s I.F. Strip. Ideal for T.V. Conversion. Brand new in original wooden cases, £3/10/-.

R.1355 RECEIVERS. Brand new, as specified in Inexpensive Television, £3/5/-.

RECEIVERS B.C. 454 (49-100 metres), B.C. 455 (39-49 metres). BRAND NEW COMPLETE WITH 6 VALVES. BLACK CRACKLE FINISH, £3/10/-.

COMMAND RECEIVERS. Type CCT-461 04 (1.5 mc/s to 3 mc/s). Complete with 6 valves, 28 volts Dynamotor. Brand new, black crackle finish, £4.

LUFBRA HOLE CUTTERS. Adjustable from ⅜in. to 3½ in. for use on Wood, Metal, Plastic, etc., 5/9. LUFBRA FLY CUTTERS, 14/6.

LIONEL "BUG" KEYS. Genuine U.S.A. Automatic Morse Key. Type 3-36. Few only, £3/7/6.

THROAT MICROPHONES. Magnetic type complete with long lead and plug, 4/6.

CONTROL CABLES for COMMAND RECEIVERS. B.C.453/4/5, 14 feet, with adaptors, 9/6.

RADIO COMPASS INDICATORS with internal Selsyn Motor. Type T-82a, 3in. Dial, 13/6. 5in. Dial, 15/6.

HAND GENERATORS. 6 volts at 5 amps. With Crank, 21/-.

SPEAKERS. Celestion 2½in. P.M. Moving Coil 3 to 5 ohms, 17/6.

PLASTIC TRANSPARENT MAP CASES. 14in. by 10½in. Ideal for Maps, Charts, Display, Photographs, etc., 8/6.

Full List of Radio Publications, 2½d

SOUTHERN RADIO SUPPLY, LTD.
11, Little Newport St., London, W.C.2.
(Gerrard 6653)

The VOIGT Loudspeaker is still ahead of all others. P.M. Unit with 22,000 line gap flux £40 ex Works.
Corner Horns (in the white) £19 - 10 - 0 or £47 - 10 - 0 ex Works.
Home demonstrations arranged in London area.
Order from
VOIGT PATENTS LTD.
Sydenham, S.E.26 *Syd 6666*

SAMSONS SURPLUS STORES

PRITCHETT & GOLD 6 v. 100-125 A.H. BATTERIES in teak cases, size 16in. x 11in. x 8in. Brand new. £6/10/-.

DELCO 6 v. CAR BATTERIES, size 9in. x 9in. x 7in. Brand new. £4/15/-. *Above batteries callers only.*

WILLARD 12 v. 85 A.H. BATTERIES in vulcanised case, size 13in. x 10½in. x 7½in. Brand new, £6/10/-, carriage 5/-.

E.D.C. ROTARY CONVERTERS. D.C. input 200-220 v., A.C. output 230 v. 185 watt, completely shrouded in metal case. £10/10/-, carriage 5/-.

HEAVY DUTY AUTO. TRANSFORMERS. 1.6 KVA tapped 0, 110, 150, 190, 230 volts. £4/17/6, carriage 5/-.

HEAVY DUTY FILAMENT TRANSFORMERS, sec. 6.3 v. 15 amp. Prim. 200/240 v. 50 cycle. 17/6, carriage 1/6.

SPECIAL OFFER. A.M. 6 mfd. 1500 v. condensers, size 4½in. x 3½in. x 3in. 5/6, carriage 9d.

30FT. LENGTH COILS CO-AXIAL CABLE, with Pye sockets on each end. 8/6, carriage 1/-.

149/171 Edgware Road, London, W.2. Pad. 7851
125 Tottenham Court Rd., W.1. Mus. 4982

All orders and enquiries to our Edgware Road branch, please. Open all day Saturday at the Edgware Road Branch.

SITUATIONS VACANT

THERMIONIC technical assistant; must be keen on industrial electronics; some experience of audio equipment.—Please state age, experience and salary required, to The Rover Co., Ltd., Lode Lane, Solihull, Birmingham.

ELECTRONIC/ELECTRICAL engineers required with Higher National Certificate (electrical) and at least 4 years' experience of radar.—Apply Employment Manager, Vickers-Armstrongs, Ltd. (Aircraft Section), Weybridge. [6906

VALVE stock-keeper required to take full charge of valve section in large electrical warehouse, must be experienced and fully conversant with all types of radio and television valves, including testing, ordering and distribution.
APPLY: J. & P. Stone Lighting & Radio, Ltd., Edgware Rd., The Hyde, Hendon, N.W.9 (Corner of Colindale Avenue). [6890

ELECTRONIC mechanic required by oil refinery for maintenance work on process controllers; applicants must have experience of automatic electronic control; industrial experience preferable but not essential.—Apply Box 0633. [6727

W. G. PYE & Co., Ltd., Scientific Instrument Makers, "Granta" Works, Newmarket Rd., Cambridge, require technical assistants in their electrical test room; they also have a vacancy with good prospects for an electronic production engineer. [6909

ELECTRONIC/ELECTRICAL engineer required with degree in Physics or Telecommunication Engineering, and at least 4 years' experience of radar.—Apply Employment Manager, Vickers-Armstrongs, Ltd. (Aircraft Section), Weybridge. [6907

INSPECTION.—Mechanical inspectors (male) required by radio component manufacturer, West London area, first-class men with A.I.D. experience essential; permanent staff appointment with good prospects.—Apply in writing giving fullest particulars to Box 1296. [6861

ENGINEER required with design experience of marine radio telephone equipment, by small progressive company (South Coast); must be capable of carrying through projects on own initiative; write full details experience, qualifications and salary expected.—Box 1331. [6093

A VACANCY exists for a fully qualified radio and television service engineer with progressive north west London retailer; congenial post, wide prospects.—Telephone for appointment Mr. D. Howell, Northern Lights, Ltd., 370, Cricklewood Lane, N.W.2. Speedwell 7477. [6871

INTERNATIONAL AERADIO, Ltd., has vacancy radio technician, preferably single, experienced S.C.B.S1, for Bahrein; inclusive salary approx. £800 p.a.; free air-conditioned quarters; no tax; Pension fund.—Write, quoting RMO, to Personnel Officer, 40, Park St., London, W.1. [6885

SENIOR and Junior Electronic Development Engineers required for work of high priority; degree or inter-B.Sc. desirable; salary £400-£750 p.a. according to qualification and experience; write stating full details to—Personnel Manager, The McMurdo Instrument Co., Ltd., Ashtead, Surrey. [6924

SENIOR and junior electronic development engineers required, H.N.C. and degree standard; experience in U.H.F. and centrimetric work an advantage.—Apply by letter, stating experience, nationality and salary required, to E.M.I. Engineering Development, Ltd., Fenileigh Works, Wells. [6843

OUTSIDE representative required to handle radio, television test gear and tape recorders, etc., by sole distributors Manchester area; permanent position for right man; salary, commission and expenses; car an advantage.—Reply stating age, experience and salary required to Box 1287. [6824

A SENIOR electronic development engineer and two junior engineers required by firm in Watford area; the work covers a wide field including L.F., R.F., and centrimetric equipment, servo mechanisms and pulse circuits.—Write, stating age, qualifications, experience and salary required to Box 1292. [6836

SOBELL INDUSTRIES, Ltd., require several keen radio/television service engineers in Lancashire and Yorkshire; basic knowledge of television principles essential; own car an advantage; pension scheme; salary, bonus and expenses.—Apply Service Manager, Sobell Industries, Ltd., "Langley Park," Slough, Bucks. [6891

INTERNATIONAL AERADIO, Ltd., has immediate vacancies able and ambitious radar engineer/instructors, Karachi, up to £1,200 p.a.; quarters free; Pension scheme; other technician posts overseas.—Write, quoting RAD, to Personnel Officer, 40, Park St., London, W.1, or ring for appointment Regent 5084. [6884

SALES engineer for the U.K. and abroad, must have specialised knowledge both of theory and practice of R.F. transmission lines and some experience in relations with the electronic industry and research; exceptional opening for right man; fullest details of qualifications, experience, age, etc., in confidence to—"S.E.P.", c/o Dixons, 1-6, Hills Place, Oxford St., London, W.1. [6843

"You can rely on us"

FOR CLEAN COMPONENTS AT COMPETITIVE PRICES

IMMEDIATE DISPATCH

MIDGET COIL-PACKS

These are an ideal miniature Coil-Pack especially suited where space is limited. They consist of iron-cored miniature coils for both Aerial and Oscillator stages, built-in Wavechange switch and midget trimmers. They are intended for an I.F. of 465 Kc/s, and I.F. Transformers type RS/GB 465 (12/6d. per pair) are the ideal companions for a trouble-free superhet.

TYPE "R"
MW/LW/GRAM. Ranges: 200-550 metres, 800-2,000 metres.
SIZE: Length 2½in. Width 1⅝in. Depth 1½in.

TYPE "S"
MW/SW/GRAM. Ranges: 200-550 metres, 17-50 metres.
SIZE: As Type "R."

TYPE "C"
LW/MW/SW. Ranges: 800-2,000 metres, 200-550 metres, 17-50 metres.
SIZE: Length 3½in. Width 1⅝in. Depth 1½in.

TYPE "R" and "S" each 28/-. TYPE "C" each 32/6. Post 6d.

All coils enclosed—all iron-dust cores adjustable. Completely wired, only five connections needed to external circuit.

Catalogue with Data, 6d.

AERIAL FILTERS 465 K/cs 6/3 Post 3d.

RADIO SERVICING Co.

444, Wandsworth Road, London, S.W.8

'Phone: MACaulay 4155.

77, 77A, Bus; 28, Tram. Wandsworth Rd. S.R. Station
Open till 6.30 p.m.

AUTOMATIC SWITCHES—

(RECONDITIONED)

ELECTRIC 1 to 100 AMPS. CLOCKWORK 7 to 35 DAYS

From 35/- EACH

All guaranteed for a year.

Write for illustrated lists: **DONOHOE,**
2, UPPER NORFOLK ST., NORTH SHIELDS, NORTHUMBERLAND.

B. & H. RADIO

EAST STREET, DARLINGTON

BASS & TREBLE SEPARATOR
Divides output to Bass and Treble speakers. Permits adjustment of treble relative to bass and allows speakers of different impedances to be matched together. Kit of Parts £1 18 6

SCRATCH FILTER
Gives marked reduction of scratch level and allows treble without serious attenuation 17 6

VARIABLE SELECTIVITY I.F. TRANSFORMERS. 465 K/cs. Give 3 degrees of selectivity. Per pair £1 0 0

WHISTLE FILTER
Is very simply inserted in the speaker wiring and gives a very sharp narrow cut which completely eliminates 9 K/cs whistle £1 15 0

SIGNAL GENERATOR
A complete portable signal source operating from a 4.5 volt battery £2 10 0

COILS: I.F. Transformers, Oscillator Coils etc. Rewound and returned C.O.D. Also Coils made to specification for Radio or Audio Frequencies. All Goods Guaranteed satisfactory or money refunded.

A REMARKABLE ACHIEVEMENT IN FILTER DESIGN



Pat. Applied For

E.M.G. STEEP-CUTTING INFINITELY VARIABLE FILTER

- Cuts at any selected frequency between 4,000 and 8,000 c.p.s.
- Average steepness of cut 30 db. per octave.
- Connects between secondary of output transformer and speaker (15 ohms, rated impedance).
- Specially valuable for use with new microgroove records.
- Greatly reduces needle-hiss on ordinary records with minimum high note loss, and suppresses high pitched interferences on radio.
- No distortion, and no appreciable loss of volume.
- Leaflet available from the manufacturers.
- *Novel circuit, patents pending.*

£4 - 10 - 0

Trade Enquiries invited

E.M.G. HANDMADE GRAMOPHONES, LTD.
6 Newman St., Oxford St., W.1.
Telephone : Museum 9971-2-3.

OPPORTUNITIES IN RADIO



Get this FREE Book!
'ENGINEERING OPPORTUNITIES'
reveals how you can become technically qualified at home for a highly paid key-appointment in the vast Radio and Television Industry. In 176 pages of intensely interesting matter, it includes full details of our up-to-the-minute home study courses in all branches of **TELEVISION and RADIO, A.M. Brit. I.R.E., City & Guilds, Special Television, Servicing, Sound Film Projection, Short Wave, High Frequency, and General Wireless Courses.**

We definitely Guarantee
"NO PASS—NO FEE"

If you're earning less than £12 a week this enlightening book is for you. Write for your copy today. It will be sent **FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
SHAKESPEARE HOUSE, 17/19 STRATFORD PLACE, LONDON, W1
BIET

SITUATIONS VACANT

A NUMBER of senior and junior vacancies for radio, radar, electronic, television, etc., development, service engineers, draughtsmen, wiremen, testers, inspectors, etc.; urgently required 30 television service engineers.—Write in confidence, Technical Employment Agency, 179, Clapham Rd., S.W.9. (Brixton 3467.) [0105

TRANSFORMERS; charge hands and inspectors with previous experience of assembly and electrical and mechanical inspection of small units required; good prospects.—Apply, with full details of qualifications, car: and wages earned, to Personnel Manager, Phoenix Telephone & Electric Works, The Hyde, Hendon, N.W.9. [6892

PLANNING and progress engineer required by electronic engineering company manufacturing industrial electronic equipment; must have sound experience of electronic instrument manufacture and radio or electronic components; age 25/35 years.—Reply stating age, experience and salary required. Quote references. Box 1290. [6829

DRAUGHTSMEN required, preferably with light electro-mechanical, electronic, or instrument experience for work of great national importance; applications from ex employees welcomed.—Write in first instance, quoting Ref. CHC/107, and giving full details, to Personnel Officer, General Electric Co., Ltd., Spon St., Coventry. [6740

DESIGNER-draughtsman required for work on industrial electronic equipment; South Manchester area; must have good knowledge of electronic components and instrument construction; age 25/35 years; permanent and progressive job for the right man.—Reply stating age, experience and salary required. Quote references. Box 1289. [6828

SENIOR designer-draughtsman required with experience of the design and development of radio and electronic components for commercial and service use; North London district; applications (which will be treated in confidence), to state age and salary required, and give full details of experience and qualifications.—Box 1235. [6819

E. K. COLE, Ltd., have vacancies in their Electronic Division at Malmesbury, Wilts. for senior and intermediate draughtsmen in the development drawing office, for work on radar, communications, and electronic projects; previous experience in this field desirable, but not essential.—Apply in writing to the Personnel Manager, Ekco Works, Malmesbury, Wilts. [6691

YOUNG electronics engineer required by a research laboratory of a large engineering firm in the Midlands to work on specialised strain gauge testing equipment; applicants should be 21 or 22 years of age, and should have had very sound training in radio or electronic engineering, together with some experience of practical development work.—Box 0711.

TECHNICAL sales engineer, to act as personal assistant to sales manager in London office of well-known component manufacturer; applicants must be fully conversant with modern radio and television technology from the manufacturing angle, and must have had recent experience in a similar capacity; write full details, experience and salary required.—Box 1400. [6954

TECHNICAL laboratory assistants with some experience preferably in the electronic experimental field are required by the Research Laboratories of The General Electric Co., Ltd., East Lane, North Wembley, Middlesex; good education essential. Good matriculation standard desirable.—Apply in writing to the Personnel Officer (Ref. GBLC/71) quoting age and record. [6936

A LARGE aircraft firm in the Midlands has vacancies for men with experience in construction and/or maintenance of electronic equipment, service as radio or radar technician in H.M. Forces an advantage; vacancies also exist for men with tool room experience and some interest in electronics, interesting work with good prospects.—Apply, stating age, experience, etc., to Box 1401. [6937

ESTIMATING engineer required by large radio manufacturer in East London, applicants should be practically trained and should have experience in the preparation of detailed estimates for radio receivers, good salary and prospects are available to a man possessing the above qualifications.—Kindly state details of qualifications and experience with age and salary required to Box 1295. [6858

REQUIRED.—Electronics/electrical designer, to take charge design and dev. wide range, covering electronic welding and process controls, small spot welders, rectifier units up to 50 KW, valve and relay circuitry experience essential; should have degree or equiv., with practical outlook; state age, experience and salary required.—Hirst Electronic Development, Ltd, Dermody Rd., London, S.E.13. [6870

RADAR Engineers, senior and junior, required for factory in North London dealing in electronic equipments; B.Sc. or Chartered Electrical Engineer or equivalent, with at least 5 years experience in works or laboratory including experience on pulse work, and centimetric transmitters; duties will involve acting as liaison between Development and Research Departments and other Works; will be required to prepare work to test specifications; write fullest particulars in confidence stating salary required to Employment Manager, Box 1380. [6930

NUSOUND PRODUCTS

136 WARDOUR STREET, LONDON, W.1

(Oxford Street end)

Tel : GERrard 8845

NUSOUND QUALITY AMPLIFIERS.
8| WATT OUTPUT. PP 6V6s—independent bass and treble boost and cut—switch for L.P. records—neg. feedback—provision for radio feeder unit—freq. response 25 to 20,000 c.p.s. ± ½ d.b.—hum 80 d.b. down at 6.5 watts—feedback 14 d.b.—sensitivity .05 volt. Price only **£14/14/-**. Also available with remote control unit. Price **£16/16/0.**

4| WATT OUTPUT—independent bass and treble boost pre-amp.—provision radio feeder unit. **£10/10/0.** Constructional booklet, **1/8**, post free. Complete kit. **£8.**

NUSOUND QUALITY FREEMEN.
Pre-set TRF—Home, Light and Third with gram. position—air spaced trimmers for stability of tuning. Size 6in.-7in. height 4in. **£7 15 6.** inc. Constructional booklet, **1/6**, post free. Pre-set S/Het.—Home, Light and Third—choice of MW and LW Light—Gram. position. Size 6in.-7in., height 4|in., **£9/10/0** inc. (Please send S.A.E. for descriptive leaflet on all our products.)

VARIABLE RADIO TUNER UNIT—MW and LW Bands—S/Het. of small dimensions—R/Gram. switch etc. Our latest model. Price **£11/5/0** inc.

NUSOUND REMOTE CONTROL & PRE-AMP. UNIT. Bass boost—Treble boost and cut—V/C and switch—L.P. correction switch—Gives a gain of 10 : 1 in voltage —Ideal for Williamson and W.W. Amplifiers. Price **£4/10/-.**

REFLEX CABINET.
At last, a reflex cabinet for the famous Wharfedale 10in. Speakers. Sizes 30in., 18in., 18in. Complete with reflector—Bass port—Polished finish. A handsome piece of furniture. Price **£9/0/-.**
A 12in. Model is also available at **£10/10/0.**

GRAMOPHONE EQUIPMENT. Connoisseur P/ups Standard L/weight, **£3/19/-**; Trans., **18/-**; Super L/weight, one head, **£5/14/6**; Micro-groove head, **£3/11/6**; Trans, **15/-**; Fibre P/up, **£4/3/-**; Special Trans, **25/-**; Garrard plug-in heads, standard, **25/-**; Miniature, **40/7**; Hi Fi, **53/6**; Adaptor **6/6**. AC47 78 r.p.m. centre drive, **£5/18/3**; Chauvoy L.P. Attachment G.53, **£3 13/6**, with Decca L.P. Xtal P/up **£6 2/3.**

Decca three-speed motor, **£7/3/6**; Connoisseur two-speed motor, **£20/19/3**; Decca Xtal P/up **53/-**; second Acos insert for L.P., **21/6**—(similar to GP20), Decca Turnover Xtal P/up, L.P. or 78, **£3/19/4.**

COLLARO A.C. 504MB—A.C. motor and Mag. P/up—Auto Stop, **£5/18/6**, with Xtal P/up, **£6/18/-**; Decca 3-speed Player, Hi Fi Mag. P/up L.P. and 78, **£19/10/-**; Goldring 3-way P/up L.P. and 78, **£3/11/6.**

We stock a full range of Wharfedale Speakers including: W15, **£13/15/-**; W12, **£5/10/-**; W10CS, **£8/10/-**; Golden C8B, **£5/7/6**; Golden, **£4/17/6**; Super 8 C8/AL, **£4/12/6**; Bronze 10in., **59/6**; Super 6CS, **£4/7/6**; Bronze 6in., **46/6**; Vitavox K15/10in., **67**; BTH, BK Senior 12in., **26/15/-**; Wharfedale Separator Type A-7-15 ohms Terminals, **69/6**; Type B 7-15 ohms Tags, **59/6**; L.F. Equaliser M01, **56/-.**

WE REGRET OWING TO INCREASED COSTS THE FOLLOWING PRICE CHANGES WILL APPLY FROM JUNE 1st.
8|w. Amp., **£15/17/6**; 4| w. Amp. A.C., **£11/10/-**; A.C./D.C., **£12**; Pre-Amp., **£5/7/6** (Gram Equip. List 44.).

Please add postage.

CRYSTALS

Type "G"

Frequency ranges : 100 kc/s to 500 kc/s ; 3 mc/s to 20 mc/s. Evacuated glass envelope having B7G valve base, with crystal connected across pins Nos. 3 and 7.

of world repute

BROOKES CRYSTALS LTD.
16, Stockwell St., Greenwich, London, S.E.10.
Phone: GREenwich 1828. Cables: Xtals London. Grams : Xtals Green London.

NORTHERN TRANSFORMERS CO.

TRANSFORMER HOUSE,
215, BARKEREND RD., BRADFORD, YORKS.

All Transformers guaranteed against faulty workmanship

ALL PRIMARIES ARE TAPPED 200/250 v. INPUT

MAINS TRANSFORMERS

DT/150, 250-0-250 v. 150 m/a., 6.3 v. 4 a. C.T., 5 v. 3 a.	35/6
MP/150, 350-0-350 v. 150 m/a., 6.3 v. 4 a. C.T., 5 v. 3 a.	37/9
DT/100, 250-0-250 v. 100 m/a., 0-4-6.3 v. 2 a., 0-4-5 v. 2 a.	25/6
MP/100, 350-0-350 v. 100 m/a., 0-4-6.3 v. 2 a., 0-4-5 v. 2 a.	27/9
DT/80, 250-0-250 v. 80 m/a., 0-4-6.3 v. 2 a., 0-4-5 v. 2 a.	24/3
MP/80, 350-0-350 v. 80 m/a., 0-4-6.3 v. 2 a., 0-4-5 v. 2 a.	26/6
DT/M3, 350-0-350 v. 80 m/a., 6.3 v. 3 a., 5 v. 2 a.	22/6
MP/160, 350-0-350 v. 250 m/a., 6.3 v. 6 a., 4 v. 2 a., 0-4-6.3 v. 2 a., 4 v. 2 a.	66/6
MP/160, 350-0-350 v. 160 m/a., 6.3 v. 6 a., 6.3 v. 3 a., 5 v. 3 a.	44/6
MP/250, 350-0-350 v. 250 m/a., 6.3 v. 6 a., 5 v. 3 a., 5 v. 3 a.	34/6
DT/120, 250-0-250 v. 120 m/a., 6.3 v. 4 a., 5 v. 3 a.	33/9
DT/M3, 250-0-250 v. 80 m/a., 6.3 v. 3 a., 5 v. 2 a.	20/6
DT/80, 250-0-250 v. 80 m/a., 6.3 v. 3 a., 5 v. 2 a.	21/6
MP/M2, 350-0-350 v. 80 m/a., 6.3 v. 3 a., 5 v. 2 a.	22/9
Williamson O.P. Transformer	87/6
Williamson Mains Transformer, 425-0-425, 6.3 v. 4 a. C.T., 5 v. 3 a., 6.3 v. 4 a. C.T.	53/6
Williamson Choke, 30 H., 20 m/a., shrouded	22/3
Williamson Choke, 50 H. 50 m/a., shrouded	24/9
Williamson Choke, 10 H., 150 m/a., shrouded	33/6
Williamson Pre-Amplifier Transformer	23/9

WE HAVE A SPECIALS DEPARTMENT WHICH DEALS SOLELY WITH WINDINGS TO ANY SPECIFICATION.

DT = Drop Through type. MP = Fully shrouded type. DT/M = Smaller Drop-through type. MP/M = Smaller fully shrouded type.

TRANSFORMERS & COILS TO SPECIFICATION.

MANUFACTURED OR REWOUND

Filter Coils a 1% a Speciality.

JOHN FACTOR LTD.

9-11 EAST STREET, TORQUAY, DEVON

'Phone: Torquay 2162

Come to

SMITH'S of EDGWARE ROAD,

the friendly shop,

for all radio components

We stock everything the constructor needs—our 25 years' experience of handling radio parts and accessories enables us to select the best of the regular lines and the more useful items from the surplus markets in :—

Loudspeakers & Phones
Transformers & Chokes
Meters & Test Equipment
Pickups & Turntables
Switches & Dials
Metalwork & Bakelite
Books & Tools
Valve Holders & Cans
Metal Rectifiers
Cabinets & Cases
Capacitors & Resistors
Coils & Formers
Plugs & Sockets
Aerials & Insulators
Motors & Generators
Wires & Cables
Panel Lights & Fuses
Sleeving, Nuts & bolts,
Tags, Clips, Grommets &
all other bits and pieces

NOTHING TOO LARGE—NOTHING TOO SMALL

We have one of the largest stocks of B.T.-H. Valves & C.R.Ts.
(No general catalogue available.)

H. L. SMITH & CO. LTD.

287/9, EDGWARE ROAD, LONDON, W.2

Tel.: Paddington 5891. Hours 9 to 6 (Thursday, 1 o'clock)
Near Edgware Road Stations, Metropolitan and Bakerloo.

SITUATIONS VACANT

BRITISH OVERSEAS AIRWAYS CORPORATION have vacancies for radio mechanics experienced in radio maintenance and/or overhaul; rates of pay 2/10 per hour plus 4½d per hour provisional bonus; attracting proficiency pay up to 3d per hour; five-day, forty-four hour week, possible shift work; good pension, sick pay and holiday facilities.—Write or call Staff Manager, Hut 29, London Airport. [6794

DRAUGHTSMEN—varied and interesting work on Electronic, Radar and Electro-Mechanical apparatus is available in a Research Group located in West London. Applications are invited from experienced Draughtsmen who are capable of designing to RCS/1000 standards.—Full details of qualifications, experience, age, salary required etc., Box A.E.572, Central News, Ltd., 17, Moorgate, London, E.C.2. [6872

DEVELOPMENT engineer required for interesting and progressive work in design and development of small transformers for radio equipment; previous experience of this type of work an advantage; salary according to age and qualifications; apply, stating age and full details of qualifications and experience, to the Personnel Department, E.M.I. Engineering Development, Ltd., Blyth Rd., Hayes, Middx. [6875

A NUMBER of staff vacancies exist at Chelmsford and in West London with Marconi's Wireless Telegraph Co., Ltd., for electrical or mechanical draughtsmen; applicants for these permanent positions, on the design and development of radio and radar equipment should write giving full details quoting ref. 142D to Central Personnel Services, English Electric Co., Ltd., 24/30, Gillingham St., London, S.W.1. [6911

DIGITAL COMPUTERS: Ferranti, Ltd., Moston, Manchester, are engaged upon the long-term development and exploitation of digital computers; this interesting work covers vacuum physics, the electronic and electrical properties of materials, computing and pulse circuit techniques, electrical and mechanical recording, electro - mechanical mechanisms, precision mechanical engineering and power supply equipment.
IN the course of this work there are occasional vacancies for senior engineers with wide experience from whom enquiries will be welcomed at any time.
THERE are immediate vacancies for:—
(1) ENGINEERS and scientists for research and development work in the above fields; qualifications include a good Honours Degree in Physics or Engineering or equivalent experience; salary according to qualifications and experience in the range £450 to £1,000 per annum; please quote Ref. D.C.E.
(2) TECHNICAL ASSISTANTS for experimental work in the above fields; qualifications are a Degree or Higher National Certificate in Engineering or equivalent; salary according to age and experience in the range £350 to £650 per annum; please quote Ref. D.C.A.
THE company has a staff pension scheme and will give housing assistance in special cases.—Application forms from the Staff Manager, Ferranti, Ltd., Hollinwood, Lancs. [6716

INTERNATIONAL AERADIO, Ltd., has vacancies Bovingdon Airport, near Watford, for progressive radio mechanics, wiremen and sheet metal workers, preferably experienced telecommunications equipment; possibility overseas appointment mechanics if desired; minimum rate mechanics equivalent £367 p.a.; 44-hour, 5-day week; Pension fund; canteen facilities.—Write, quoting RMH, Personnel Officer, 40, Park St., London, W.1. [6886

DESIGNER - Draughtsman with Higher National Certificate, University Degree or similar qualifications and with 2-4 years' experience are required for work with experimental research teams in mechanical and radio engineering.—Applications giving age and record should be sent to the Personnel Officer (Ref. GBLC/479) Research Laboratories of The General Electric Co., Ltd., East Lane, North Wembley, Middlesex. [6827

INTERNATIONAL AERADIO, Ltd., have vacancy for a radio technician, preferably single, in Khartoum: M.C.A., A.R.M.E. licence desirable; experience installation and maintenance Dove equipment; Marconi AD 107/108; ST & C STR9s and 953 Beacon; commencing salary, single man £710–£790, quarters provided; no income tax; free passages; pension fund; medical facilities.—Write, Ref. RMK, Personnel Officer, 40, Park St., W.1. [6835

RADIO-Radar development engineers urgently required, accommodation available; applications are invited from senior and junior development engineers, preferably with experience of radar or microwave technique, who are capable of developing equipment or components to service specification; successful candidates will be employed on work of great National Importance.—Write, quoting reference CHC. (5), to Personnel Officer, General Electric Co., Ltd., Radio and Television Works, Spon St., Coventry. [6823

SEVERAL vacancies exist in the development laboratory of the General Electric Co., Ltd., Witton, for development engineers in the electronics, small motor engineering and high power switchgear test sections; applicants should preferably possess a degree or Higher National Certificate in electrical engineering, but those taking their final examination this year will also be considered; salaries will depend upon qualifications, age and experience.—Apply in writing, giving full particulars, to Staff Manager, General Electric Co., Ltd., Witton, Birmingham, 6. [6784

Prominent Aircraft Firm

in Greater London area commencing new project of National Importance offers unique opportunity for advancement.

High salaries with monthly status and pension scheme offered to suitably qualified applicants. Engineers required with good theoretical and practical experience in design and research in any of the following specialist groups :—

(a) RADAR, Marine or Aircraft, (b) U.H.F. Radio, (c) Low Frequency Amplifiers, (d) Electro-mechanical measurement techniques.

City and Guilds qualification or University degree desirable though not essential.

Apply, stating age, nationality and experience, to Box AC.60195, Samson Clark & Co. Ltd., 57/61, Mortimer Street, W.1.

MAGNETIC TAPE RECORDERS and COMPONENTS

from

WILL DAY, LIMITED

19 Lisle Street, London, W.C.2.
GERrard 7105 and 4476
LIST SENT BY RETURN

Prominent Aircraft Firm

in Greater London area commencing New Project of great National importance offers unique opportunity for advancement.

High salaries with monthly staff status and pension scheme offered to suitably qualified applicants.
Electronic Engineers with 1st class honours degree or equivalent qualification.

Apply stating age, nationality and experience to Box AC.58820 Samson Clark & Co. Ltd., 57/61 Mortimer Street, W.1

SELENIUM H.T.&L.T. RECTIFIERS, - CHARGER KITS, CHARGERS

New Goods with Full Guarantee



CHARGER KITS. Standard 2 v., 6 v., 12 v. kit comprises 12 v. 2 amp. selenium rectifier, 48 watt impregnated transformer, ballast bulb, no rheo or ammeter needed. dead reliable and foolproof **28/6**, post 1/6. Or with handsome steel case as illus., **50/-**. Ditto but with 3 amp rectifier and 65 watt trans., **46/6** post 1/6; or with specially manf'd. steel case, screws, grommets **64/-**. Special steel case, screws, grommets **17/-**. 4 amp. kit as above for 6 v., 12 v., 110., less case, **50/6**. Minor Kits, 2 v., 6 v., 12 v. 1 amp. **26/6**. Post 1/2. 6 v. 1 amp. for 230 v./250 v. only **19/6**, post 1/2. 6 v. 1 amp. **20/-**. Transformer and rectifier for 2 v. 1 amp. trickle charger, **12/6**, post 6d.

"AUTOMAT" Car or Radio chargers, as illus., virtually unwreckable and ultra reliable, as tested by motoring press 6 v./12 v. 1 amp. **52/6**; 2 amp. **59/6**. Wt. 8½ lb. Carr. 2/-. 5 amp. model, 16lb. **£5/19/6**. Carr. 5/-. 12 months' guarantee.

SMALL SPACE H.T. RECTS., for A.C./D.C. sets etc., new, wrapped in maker's wrappings. 250 v. 60 ma., 7/- post 6d. 130 v. 60 ma. for U.S.A. midgets, **6/6**; 120/150 v. 30 ma. Eliminator type **6/6**. 50 v. 40 ma. Mini type 3/-; 250 v. 100 ma. bridge **14/-**. 350-0-350 v. 80 ma. **15/6**.

S.T.C. SELENIUM RECTIFIERS, new stock, 2 v./6 v. ½ amp. **4/10**; 6 v. 2 amp. **9/-**; 6 v. 4 amp. **16/-**; 6 v. 10 amp. **22/6**; 12/15 v. 1 amp. **12/6**; 12/15 v. 2 amp. h.w. **12/-**; bridge **15/-**; 12 v. 3 amp **17/-**; 12/15 v. 4 amp. **23/-**; 4.5 amp. **26/-**; 6 amp. **35/-**; 18 v. 4 amp. **27/6**.

ELIMINATOR KIT, for 120 v. 20/30 ma. with trickle charge 22 watt trans. layer wound, 30 ma. h.t. rectifier, 2 v. ½ amp. trickle rect., 2 × 16 mfds. condensers, handsome steel case, **45/-**. Post 1/2, less case **35/-**.

HEAVY DUTY CHARGER KITS. S.T.C. 12 v. 6 amp., giant finned rectifier 126 watt trans., ammeter, worm drive slider res. for 6 v. 12 v., 6 amp., 16lb. **84/7/-**. Post 2 parcels, 3/6. Ditto but 4 amp. **£3/17/-**. Ditto, but for 18 v. 4 amp. d.c. output, charges up to 18 cells at 2 amps. **£4/15/-**. Carr. 5/-.

"REREWEAT" battery desulphator and conditioner, radio 1/9; car size 3/-. Post 6d.

CHAMPION PRODUCTS

43 Uplands Way, London, N.21. Phone LAB 4457

WILCO ELECTRONICS

CONDENSERS. Block type. 8 Mfd. 750 v. D.C., 10/6 ea. ; 10 Mfd. 1000 v. D.C., 15/- ea. ; 10 Mfd. 1500 v. D.C., 23/- ea. ; 1.5 Mfd. 4000 v. D.C., 25/- ea.

RECEIVER R.1155. One of the best communication receivers covering 7.5 Mc/s to 75 Kc/s in 5 wavebands, complete with 10 valves. Brand new in maker's transit case, **£10/10/-**. Carriage 7/6 Others not so clean, from £8/10/-.

AIRCRAFT CLOCKS with splendid 8-day jewelled movement. flange type, made to stringent Govt. specification. Brand new, guaranteed. Ideal for car, study, bedroom, etc., will withstand vibration and shocks. Special offer, 65/- each. Post free.

POWER PACK, Type 3, for R1132A receiver. Brand new, in perfect condition, input swicched 200 to 250 volts, A.C. 50 cycle, with two smoothing chokes, fitted D.C. voltmeter 0-300, milliampere meter 0-150, fuses, etc. A superb job. **44/19/6**. Carr. 10/-.

TEST SET, Type 28. incorporating a 50 Microamp meter, in steel case 6in. × 3½in. × 3in. with carrying handle, **50/-**.

POWER UNITS. Comprising standard mains transformer, 350-0-350 volts 80 Ma., 6.3 vol 1 a., 6.3 volt .5 a., 5 volt 2 a., L.F. choke, 8+8 Mfd. condensers, 5Z4G valve etc., contained in steel case 9in × 8½ in. × 8in. Sufficient room to build in small amplifier Brand new **£2/10/-**. carr and pkg. 5/-.

OSCILLOSCOPE UNIT, W/756B in steel case 9¼in. × 17in × 21in. by Marconi. Containing mains transformer, 2,500 volts at 5 Ma., 4 v. at 2 amp. Smoothing condensers, 2—.5 Mfd. 4,000 v. wkg., 1—.5 Mfd. 1,500 v. D.C., 1—2 Mfd. 500 v. D.C. Tube holder for VCR97. Mu-metal screen, etc. Brand new. Bargain Price £5. Cge. and Pkg. 10/-.

RACKS. 5ft. 6in. high for 19in. panels, **50/-**.

OPERATORS' DESKS, for standard 19in. rack mounting, 12in. deep, **15/-** each.

METAL RECTIFIERS. Bridge Type, 40 volts 1 amp., 10/6 ea. ; 36 v. 2.4 amp., 25/- ea. ; ½ wave type 24 v. 150 Ma., 2/- ea. ; 192 v. 40 Ma., 3/6 ea. ; 450 v. 40 Ma., 7/6 ea.

204 LOWER ADDISCOMBE ROAD, CROYDON

SITUATIONS VACANT

CAPABLE radio engineer required with television experience, ability to drive an advantage, for a well equipped service department where ambition and efficiency is well recognised. AGENCIES held: H.M.V., Murphy, Pye, Ekco, Philips, R.G.D., etc.—Apply Barnes & Ayris, Ltd., 140-141, Friar St., Reading, Berks. [6935

UNIVERSITY students, aged 20-26, in physics, electrical and mechanical engineering who are taking Finals this summer are invited to send details of their records to the Personnel Officer (Ref. GBLC/583) Research Laboratories of The General Electric Co., Ltd., North Wembley, Middx. A number of interesting vacancies on experimental work are available and candidates will be considered who will be free to commence work during the next six months. [6859

GENERAL Sales Manager.—A company manufacturing domestic electric appliances and sound reproduction equipment in the London area invites applications for a position carrying full responsibility for sales at home and overseas; applicants must be experienced and fully qualified with technical background, and evidence of successful activity in a similar position is essential.—Full particulars and salary required to Box 1281. [6807

A GRADUATE engineer is required by Marconi's Wireless Telegraph Co., Ltd., Chelmsford, for work on development and installation of high power transmitting aerials and associated equipment; a good salary will be offered to suitable applicant; the company operates a staff superannuation scheme.—Please write, giving full details, and quoting ref. 874, to Central Personnel Services, English Electric Co., Ltd., 24/30, Gillingham St., London, S.W.1. [6839

TECHNICAL assistant with considerable experience of the wire and cable industry is required for light current and electronic engineering; the position involves a wide knowledge of specifications, the ability to prepare and maintain a classified index of cables, and the experience to assist designers in choosing cables. —Applicants should write, giving full details to the Personnel Department, E.M.I. Engineering Development, Ltd., (ED/40), Hayes, Middx. [6844

INTERNATIONAL AERADIO, Ltd., has vacancies at Bovingdon Airport, near Watford, for Radio Mechanics experienced installation and maintanence ground equipment for radio work of national importance; possibility overseas appointment later if desired; pension scheme; two weeks' paid annual leave; single accommodation may be available; canteen facilities.—Write, quoting reference RMR and this newspaper, Personnel Officer, 40, Park St., London, W.1. [6711

TECHNICAL sales representatives, one for the Birmingham and the Midlands, and the other for London and the South, required by well-known component manufacturer; applicants must be car owners and be thoroughly conversant with modern radio and television technology from the manufacturing angle, and, for preference, should have had some experience in a similar capacity; salary plus expenses; write full details including salary required.—Box 1309. [6853

BELLING & LEE, Ltd., 540, Cambridge Arterial Rd., Enfield, Middlesex, wish to engage a specialist to conduct aerial research and development, particularly at television frequencies; applicants must possess scientific qualifications, together with considerable experience in the field, must be imaginative and original, and able to work with minimum supervision; excellent research facilities are available, and an attractive salary will be offered to the right applicant. [6704

ACCOMMODATION available for applicants selected to fill further vacancies arising for capable design engineers and senior draughtsmen, having extensive electronic, electromechanical or instrument experience; successful candidates will be employed on work of great national importance; attractive terms and working conditions.—Write in first instance, quoting Ref. CHC/106 and giving full details, to Personnel Officer, General Electric Co., Ltd., Spon St., Coventry. [6739

ELECTRICAL and electronic engineers required in connection with expanding work on new projects; applicants should have at least Higher National Certificate in Electrical Engineering, or an equivalent qualification, and experience in one or more of the following: Small motors, instruments, servo-mechanisms, pulse techniques, computor circuits.—Write, stating experience and qualifications, to Employment Manager, Vickers-Armstrongs, Ltd. (Aircraft Section), Weybridge. [6823

ELECTRONIC engineers required by Government Department for unestablished post; experience of development work, including circuit design in telecommunications and of pulse techniques an advantage: Higher National Certificate or equivalent essential; pay: £325 at 21 with increments of £25 to £425 at £25; applicants over the age of 25 start at the 25 age point; satisfactory performance of duties leads after age 25 and at least a year's service to a grade with salary £425-£600; London rates are quoted; provincial rates are rather less; further prospects of advancement on merit to a grade with maximum of £700.—Apply for application form to M.L.N.S., Technical and Scientific Register, (RC) York House, Kingsway W.C.2, quoting D85/51-A. Closing date 14 June, 1951. [6842

SUPACOILS

OFFER

THE LATEST EDITION OF THE

HOME CONSTRUCTOR'S HANDBOOK

No keen radio enthusiast should be without this invaluable booklet which is of equal use to beginner, amateur or professional radio engineer. It contains, among other things :

- Circuits of Feeder units, Superhet receivers, Test equipment, Amplifiers and power packs, etc.
- Pages of servicing and constructional information which will assist you in YOUR radio problem.
- Complete resistance colour code.
- A considerable amount of invaluable general Radio information.
- A comprehensive catalogue.
- Above all it is profusely illustrated with half tone blocks and costs 2/- only or a copy will be given **FREE** with every order for £1 or more.

We also offer the following selection from our stocks of quality components :

- **COILS.** A complete series of High Q variable iron dust cored coils (as recommended for the P.W. 9 valver) in wavelengths 10-30, 16-50, 30-75, 75-200, 190-550 and 800-2000 metres ; Aerial, H.F. or Oscillator at the remarkable price of 3/- each.
- **MODEL 30** famous 3 waveband superhet Coil Packs, aligned, **33/4** inc. full connection details and instructions given with every pack.
- **MODEL 40** Coil Packs—similar, with R.F. stage, aligned, **90/2** inc.
- **MODEL 30 TUNING UNIT** consisting of 30 Coil Pack, pair of I.F. Transformers, matched 2-gang and attractive Dial. Components aligned together as a unit and sealed. **88/1** inc.
- **MODEL 40 TUNING UNIT,** similar with R.F. stage ..... **129/2** inc.
- **CHASSIS.** Good quality aluminium chassis in stock for 5 v. Rec. **11/6** ; 6 v. Rec. **12/6**. Amplifiers and Feeder Units, etc., from **8/-**
- **SPECIAL** 11 7 pole 4-way, 3 bank switches ..... **11/6** ea.
- **COIL GROUPS.** The very popular Coil Group A **29/-**
  Coil Group B **47/6**
- **LATEST.** Litz wound, Iron dust cored TRF COILS. M.W. only, Aerial and H.F. **7/6 PAIR**

See also our classified advertisement

SUPACOILS MAIL ORDER OFFICE

98, Greenway Ave., London, E.17

MORSE CODE TRAINING



COURSES for BEGINNERS and OPERATORS., also a **SPECIAL COURSE** for passing the **G.P.O. Morse Test** for securing an **AMATEUR'S TRANSMITTING LICENCE.**

Send for the Candler

BOOK OF FACTS

It gives details of all Courses

THE CANDLER SYSTEM CO.

(55W), 121 KINGSWAY, LONDON, W.C.2

Candler System Co., Denver, Colorado, U.S.A.

TAMSA

TAPE & WIRE RECORDING COMPONENTS

Write for the latest price list of the following:—
RECORD, PLAYBACK & ERASE HEADS. THE NEW TAMSA HEAD RANGE ARE NOW AVAILABLE.
RECORD PLAYBACK AMPLIFIERS
OSCILLATOR COILS & UNITS.

TAPE E.M.I. G.E.C. DUREX 5", 7", 11" Spools.
WIRE On standard ¼, ½, and 1hr. Spools.

Constructor's Envelopes. Books on Tape Rec'd'g.

Manufactured by

AUDIGRAPH LTD.

Dept. MR3, 74, Great Hampton Street, HOCKLEY, BIRMINGHAM 18

RADIO G200 OFFERS

2-Volt Accumulators. Lead Acid.
Patt No. 3361 10 Amp Hr.
Dimensions 6¼" × 1⅞" × 1⅞"
Price 6/6 each. *Post 10d.*
TRADE & OVERSEAS ENQUIRIES INVITED
Overseas Telegrams: "HOILERAD, MAIDSTONE"

ARTHUR HOILE 55 UNION STREET, MAIDSTONE Tel. 3512

QUALITY TELEVISION COMPONENTS

HR

Scanning and Focus Coils
P.M. Focus Units
5/10 Kv. R.F. E.H.T. Units
E.H.T. and Output Transformers
"TELEVISION CIRCUITS"
1/9, post free.

HAYNES RADIO Ltd.
Queensway · Enfield · Middlesex

Amateur Short Wave Radio for Beginners

★ *Send for interesting free literature and catalogue—enclose stamp for postage.*

'GLOBE-KING' Kits from 21'- post pd.

Note new address:

JOHNSONS (RADIO)
46, FRIAR ST., WORCESTER

SPENCER WEST

Convertors suitable for employment with London or Birmingham type receivers to permit reception of Holme Moss are now available ex-stock. These convertors are reliable and manufactured to our usual very high standard. They are fully guaranteed and the large number already in use confirms our claims for improved and trouble free reception.

Brief specification: 5 valves including rectifier, self contained power supply unit, double mixer stage ensuring highest definition when receiving single side band transmitter. Compact dimensions. Price complete £5 gns. Leaflets are available on request.

The SPENCER WEST type AC/3 Pre-amplifier achieves a new standard of reception for "fringe" viewers. We are confident it will improve results even when a pre-amplifier is already in use, and we will arrange for a 7-days' trial if desired to permit this claim to be confirmed. Leaflets on request.

SPENCER WEST

Quay Works, Gt. Yarmouth

SITUATIONS VACANT

VACANCIES exist for production inspectors at various Admiralty Establishments and in shipbuilding and industrial centres in various parts of the country. The duties involve work in connection with the manufacture, inspection, test and installation of a wide variety of mechanical and electrical equipment for H.M. Ships. For certain of the posts experience of electronic, including radar apparatus, will be advantageous. CANDIDATES, who must be at least 25, should have served a recognised engineering apprenticeship or have had equivalent training, followed by at least three years' relevant experience in industry or Government service. They should preferably be in possession of Higher National Certificate or equivalent; a lower qualification such as Ordinary National Certificate might, however, be considered. Appointments will be unestablished, but there may be opportunities at a later date of competing for permanent posts. The salary scale is £570 by £20 to £675 per annum and entry will be at the minimum, subject to a deduction of £20 for each year by which the age of entry falls short of 30. Rates outside London are a little lower. Write, quoting D53/51-A, to the Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2, for application form which must be returned completed by 14 June, 1951. [6940

ELECTRONIC engineers (senior or junior) required for work on interesting new projects in our Research Division; good Academic qualifications required, or exceptional experience; honours graduates in mathematics and physics, will be considered even if they have had no previous electronic experience; excellent pay and prospects for suitable applicants; Pension scheme. —Apply in writing, with full personal details, to: The Personnel Manager, Fairey Aviation Co., Ltd., Hayes, Middx., quoting Ref. RD/EN. [6874

THERE are a number of vacancies suitable for Honours Graduates in Physics, electrical or mechanical engineering or mathematics, or a good general Degree covering two or more of these subjects, for both research and development work in the following fields: radio and line communications, radar, electronic instrumentation, microwaves, ultrasonics, vacuum techniques and electromechanical devices; salary according to qualifications and experience, consistent with general present-day levels; there are vacancies for which considerable post-graduate experience is required and others for which previous experience is not necessary; consideration will be given to students taking finals during the current academic year; prospects of promotion are good, and the posts all fall within the Mullard Company's Superannuation Scheme.—Apply Personnel Officer, Mullard Electronic Research Laboratory, Salfords, Nr. Redhill, Surrey. [6885

ADMIRALTY.—Vacancies exist for electrical and/or mechanical engineering draughtsmen in Admiralty Research and Development Establishments located in the vicinity of Weymouth, Portsmouth, Teddington (Middlesex) and Baldock, Herts; draughtsmen experienced in light current, electro-mechanical, precision mechanical and electronic equipment are particularly needed; candidates must be British subjects of 21 years of age and upwards, who have had practical workshop experience (preferably an apprenticeship) together with drawing office experience; appointments will be in an unestablished capacity, but opportunities may occur for qualified staff to compete for established posts; the salaries offered, depending on age, experience, ability and place of duty, will be within the range £285—£510 p.a.; exceptionally well-qualified candidates may be considered for appointment in a higher grade within the salary range £470—£610 p.a.; hostel accommodation is available at some establishments.
APPLICATIONS, stating age and details of technical qualifications and apprenticeship (or equivalents) and workshop and drawing office experience, should be sent to Admiralty (C.E.H. Room 88), Empire Hotel, Bath; original testimonials should not be forwarded with application; candidates required for interview (at London or Bath whichever is nearer) will be advised within two weeks of receipt of application. [6621

ADMIRALTY.—Temporary Assistant Overseers, experienced in all electrical engineering techniques are required for temporary service in the overseeing service of the Electrical Engineering Dept., Admiralty; vacancies exist at Glasgow, Belfast, Manchester, Newcastle, Nottingham, Gainsborough and Edinburgh, and further vacancies are expected to arise in other towns; candidates must be British subjects of 21 years of age and upwards who have had practical workshop experience and preferably an apprenticeship; salary will be assessed according to age, qualifications and experience on a range with a London maximum of £625 p.a.; for candidates of 30 years of age salary will normally be related directly to age, i.e., £500 p.a. (London), and for younger candidates will be approximately £20 p.a. less than the age 30 rate for each year of age they are under 30; the London rates are reduced by from £10 to £15 p.a. at intermediate centres such as Belfast, Glasgow, Manchester and Newcastle, and by from £20 to £30 p.a. at other towns in the provinces.
APPLICATIONS, stating age, details of technical qualifications and of apprenticeship (or equivalent) and of workshop experience, should be sent to the Admiralty, Empire Hotel (C.E.H. Room 85), Bath. Candidates will be interviewed locally as soon as possible after receipt of their applications. [6316

'Radiospares' Quality Parts

THE SERVICE ENGINEER'S FIRST CHOICE

LOCKWOOD
makers of
Fine Cabinets
and woodwork of every description for the Radio and allied trades

LOCKWOOD & COMPANY
Lowlands Rd., Harrow Middlesex. Byron 3704

TELECRAFT
AERIALS ENSURE THE BEST TELEVISION
TRY ONE AND SEE FOR YOURSELF

RAINBOW RADIO and TELEVISION
OUTSTANDING PERFORMANCE
KEENLY PRICED
T.V. PRE-AMPLIFIERS AND
FREQUENCY CONVERTORS
Your DEALER will be pleased to supply

100 kcs. QUARTZ CRYSTAL UNIT *Type* Q5/100



for Secondary Frequency Standards

★ Accuracy better than 0.01%. ★ Temperature coefficient 2 parts in a million per degree Centigrade temperature change. ★ Gold electrodes applied by cathodic sputtering direct to the faces of the crystal, giving permanence of calibration. ★ Simple single valve circuit gives strong harmonics at 100 kcs. intervals up to 20 Mcs. ★ Octal based mount of compact dimensions. PRICE 45/- *Post Free*

Full details of the Q5/100 including circuit are contained in our leaflet Q1. Send stamp today for your copy.

THE QUARTZ CRYSTAL Co., Ltd.
43-71 Kingston Road,
NEW MALDEN, SURREY
Telephone: MALden 0334

THIS IS
REOSOUND
REG. TRADE MARK

MANUFACTURERS
of
SOUND REPRODUCING EQUIPMENT
and
ACCESSORIES

We regret that owing to rising costs of materials, etc., all our list prices will be subject to:

10% INCREASE FROM 31st MARCH, 1951.

We wish to apologise to those Customers who have been kept waiting for our products, due to the uncertain deliveries of raw materials at the present time and our many Priority commitments.

RACKS • PANELS • CHASSIS
INSTRUMENT CASES • AMPLIFIER CABINETS, INCLUDING PACK-FLAT EXPORT VERSION. FINISHES IN GLOSSY & WRINKLE STOVED ENAMEL

ILLUSTRATED LISTS ON REQUEST. TRADE TERMS ON APPLICATION.

REOSOUND ENGINEERING & ELECTRICAL COMPANY, "Reosound Works," Coleshill Road, Sutton Coldfield.

Grams: Reosound, Sutton Coldfield. Tel.: SUT. 4685.

THE "FLUXITE QUINS" AT WORK

"Here's the last word in sets. It's supreme! And made from odd bits. It's a dream! Every wire soldered right, Of course, with FLUXITE. Power cuts? No it's driven by steam!"

See that **FLUXITE** is always by you—in the house garage — workshop — wherever speedy soldering is needed. Used for over 40 years in Government works and by leading engineers and manufacturers. Of all ironmongers—in tins from 1/- upwards.

TO CYCLISTS! For stronger wheels that will remain round and true, here's a time tested tip. Tie the spokes where they cross with fine wire AND SOLDER. It's simple — with FLUXITE — but IMPORTANT.

The **FLUXITE GUN** puts **FLUXITE** where you want it by a simple pressure. Price 10/6, or filled, 15/6.

FLUXITE
SIMPLIFIES *ALL* SOLDERING

Write for Book on the Art of "SOFT" Soldering and for leaflet on CASE-HARDENING STEEL and TEMPERING TOOLS with FLUXITE. Price 1d each

FLUXITE LTD. (Dept. WW), BERMONDSEY STREET, LONDON, S.E.1.

SITUATIONS VACANT

LITTLEHAMPTON, Sussex.—Television/radio service engineer, must be competent and thoroughly experienced.—Cash & Hammond, Beach Rd., Littlehampton. [6853

YOUTH required by firm of amplifier manufacturers for assembly and wiring, and to assist engineer generally; excellent prospects, permanency.—Northern Radio Services, 16, Kings College Rd., N.W.3. [6939

SITUATIONS WANTED

R.A.F. wireless mech. (37) seeks radio service situation.—G.H.T., 4, Edward Rd., E. Bedfont, Middx. [6815

TECHNICAL manager leading firm desires change, many years' experience radio and TV design and production.—Box 1398. [6851

RADIO Relay and Service Engineer in sole charge of concession; requires similar post, or as engineer to a group of exchanges; considerable radio and T.V. experience; good refs for ability and integrity.—Box 1358 [6906

BUSINESSES FOR SALE AND WANTED

FULLY fitted electrical equipment and light engineering factory for sale freehold, site area approx. 1 acre, covered space approx. 14,000 sq ft, situated approx. 30 miles from London, skilled labour available; price, including all fixtures, machine tools, hoses and fixed equipment, £45,000.—Full details apply J. P. Kane, F.A.L.P.A., 46, Dover St., London, W.1. Tel. No. Regent 5175. [6845

TECHNICAL TRAINING

E.M.I. gave the world electronic television.

E.M.I. is now giving the finest home study television courses; moderate terms—facilities for easy payment; free brochure giving full details on application to the Registrar, Dept. WW7.

E.M.I. INSTITUTES, 10, Pembridge Sq., London, W.2. Bayswater 5131-3. [0179

CITY & Guilds (Electrical, etc.), on "No Pass—No Fees" terms. Over 95% successes. For full details of modern courses in all branches of Electrical Technology send for our 176-page handbook, free and post free.—B.I.E.T. (Dept. 388A), 17, Stratford Place, London, W.1.

PAINTS, CELLULOSE, ETC.

PAINT spraying handbook 3/6, post free; cellulose and synthetic paints and all spraying requisites supplied; catalogue free.—Leonard Brooks, 53, Harold Wood, Romford. [0207

TUITION

WIRELESS operating; attendance and postal courses; stamp for reply to Manager, The Wireless School, Manor Gdns., London, N.7.

NOTHING succeeds like success! What we have done a thousand times we can do again, for you.—See the B.N.B.S. advt. page 90. [0172

SEE the world, 600 Radio Officers required; send 2d stamp for prospectus to Britain's leading college; we train most, in shortest period, at lowest cost.—Wireless College, Colwyn Bay.

A.M.I.Mech.E., A.M.Brit.I.R.E., City and Guilds, etc., on "no pass—no fee" terms; over 95% successes. For details of exams and courses in all branches of engineering, building, etc., write for 176-page handbook—free—B.I.E.T. (Dept. 387B), 17, Stratford Place, London, W.1. [0118

NORWOOD Technical College, W. Norwood, London, S.E.27.—Full-time, part-time day and evening courses in radio and television (technology and servicing), radar and line; preparation for following examinations, C. & G. Full Technological, R.T.E.B., Amateur Transmitting Licence, P.M.G.; free telecom. prospectus (A) from the secretary; (170). [6801

TELEVISION postal course for radio trades Examination Board's diploma; also postal courses for P.M.G. 2nd and 1st class Certificates and Amateur Radio Transmitting licence. —Apply British School of Telegraphy, Ltd., 179, Clapham Rd., London, S.W.9. (40 years' experience in coaching students in wireless telegraphy and allied subjects.) [0134

THE Institute of Practical Radio Engineers have available home study courses in every phase of radio and television engineering, specialising in the practical training of apprentices in the retail trade; enrolments limited, fees moderate.—The Syllabus of Instructional Text may be obtained post free from the Secretary, I.P.R.E., Fairfield House, 20, Fairfield Rd., Crouch End, London, N.8. [0088

PERSONAL

WILL G. W. Lowe, late Marylebone High St., communicate Box 1433. [6941

BOOKS, INSTRUCTIONS, ETC.

I.P.R.E. Technical Publications; 5,000 alignment peaks for superheterodynes, 4/9 post free; The Practical Radio Engineer, quarterly publication of the Institute, sample copy 2/- post free; membership and examination data 1/- post free.—Secretary, I.P.R.E., 20, Fairfield Rd., London, N.8. [0088

NEW PRODUCTS

CHANCERY ADAPTOR. Place it on any 78 r.p.m. turntable (single record or autochange, rim or centre drive) and it gives you 33 r.p.m.—no fuss, no alterations £3/12/6; Decca lightweight pickup fitted Acos GP19LP permanent sapphire for L.P. to match above, height, tone and weight compensated £2/13/-. Both fittable by layman. £6/2/3 the two, ins. post 2/6. Ex stock.

DECCA THREE-SPEED GRAM. MOTOR and substantial turntable, fitted precision switch giving 33⅓, 45 and 78 r.p.m. Our special offer £7/3/9, tax paid plus 2/6 post.

LIGHTWEIGHT PICKUP to match, complete with Acos GP19 (78) and GP19LP (33⅓) plug-in cartridges with permanent sapphires £4/4/6 or with either one head only £2/13/0, post 1/6. Spare heads 32/6.

N.R.S. THREE-SPEED RECORD PLAYER, comprising above Decca motor and light-weight pickup with two Acos plug-in cartridges (GP19 and GP19LP) in de luxe portable leatherette case. Sensational value at 15 gns. (carriage and packing 7/6).

DECCA LONG-PLAYING RECORDS by Post. Send 2½d. for list of titles.

SYMPHONY NO. 1 (AMPLIFIER) by N.R.S. The most versatile domestic Audio Amplifier on the market today! Independent control of Bass, Middle and Top, separate Scratch Cut, negative feedback. For A.C. 200-250 v., input for magnetic, crystal and hi-fi pickups also Tuner. 5-watt output. Price 3 ohm model, 9½ gns.; 15 ohm model £10/7/6, carriage 5/-.

SYMPHONY NO. 2. Same theme as No. 1 but having 10 watts Push-Pull output: 3, 7.5 and 15 ohms. Inputs as No. 1—full provision for Tuner. Woden Mains Transformer. Output trans. and Choke. Price 14 gns. Carriage 5/-.

NO. 1 PUBLIC ADDRESS AMPLIFIER, as No. 2 Symphony but having 15 watts output. Has two inputs—one for gram. and one for mike—with separate volume controls for fading in and out. Tone control. Complete kit with instructions 10 gns., or built, £11/19/6, carriage 5/- Crackle cover, etc., £2 if required.

No. 1 DOMESTIC AMPLIFIER, 4 watts output, volume, tone and feedback controls, input for magnetic and crystal pickups also tuner. Gratifying quality. 6 gns. (carriage 4/-).

BASS-REFLEX CABINET KITS give superb bass response and top. (¾in. patent timber) full instructions supplied 9in. speaker model 2ft. 6in. high × 1ft. 3in. × 1ft. deep. Price 85/-; 10in. speaker model 97/6; 12in. speaker model 107/6. Any of above ready built for 7/6 extra. Carriage in any case 7/6.

COLLARO MICROGRAM CASES 16½ × 13 × 7in. complete, uncut motorboard. Further supply now available at 47/6, post 2/6. Send 2½d. now for new CATALOGUE AND BARGAIN SUPPLEMENT, indispensable to all Quality Enthusiasts. TERMS c.w.o. or c.o.d. Callers welcome. Demonstrations Monday to Saturday (inclusive) 9 a.m. to 6 p.m.

NORTHERN RADIO SERVICE & Co.
16 Kings College Road, London, N.W.3
Phone: PRImrose 8314.

PARALEX ADJUSTABLE HOLE CUTTER
Selected for the
FESTIVAL of BRITAIN 1951

A PRECISION TOOL
Capacity 1" to 4"
Vernier adjustment
1" High Speed 18% Tungsten Toolbit

P.L. round shank..... **18/-** each
P.L.S. square tap. shank ..... **17/-** each

ALFA PRECISE INSTRUMENT CO.
111 Greencroft Gardens, London, N.W.6

SLOTTED LINE TEST EQUIPMENT For aerial matching, etc., 360 to 675 Mc/s, complete with instruction book, £10.

SIGNAL GENERATORS. 1.72 f. Ex-U.S.A., range 100 kc. to 32 Mc/s in five ranges, 400 cycle modulation, output 30,000 microvolts, in metal cabinet. Crackle finish with carrying handle, for 110-125 volts A.C. operation. Brand new, unused, £19/10/-.

RELAYS P.O. TYPE 3000. SIEMENS HIGH SPEED.

CONTACTS up to 6 changeover. COILS up to 20,000 ohms. Large stocks held. Also: TELEPHONE HANDSETS, JACK SOCKETS, KEY SWITCHES, SLYDLOK FUSES, CONDENSERS, Etc. *Wholesale Only.*

L. WILKINSON

10, LANSDOWNE RD., CROYDON, SURREY

VALVES? We probably have just the one you want, such as 6A7, 18, 30, 39, 42, 43, 45, 75, 77, 78, 80, etc. We hold one of the largest stocks in the country at current B.O.T. prices. Why not drop us a card or 'phone Luton 2677? We will send off next post.

You can Rely on

COVENTRY RADIO

189 DUNSTABLE ROAD, LUTON, BEDS

BOOKS, INSTRUCTIONS, ETC.

"THE Complete Amateur Photographer." By Dick Boer, edited by A. L. M. Sowerby, B.A., M.Sc., F.R.P.S. An introduction to the art and technique of photography for amateurs who want to progress and for those studying photography as a profession. 8½in×6in. 254 pp. 21/- net. By post 21/8 from all booksellers or The Publishing Dept., Dorset House, Stamford St., London, S.E.1. [F001

"BRIGHTER Photography for Beginners." By David Charles, F.R.P.S. 4th Edition. A completely revised and rewritten edition of a popular book that gives an easily understood non-technical explanation of how to get the best results from a camera. 7¼×5in. 174 pp. 6/- net. By post 6/4 from all booksellers or The Publishing Dept., Dorset House, Stamford St., London, S.E.1. [F002

"PHOTOGRAPHIC Enlarging." By David Charles, F.R.P.S. 2nd Edition. The different types of enlargers are described and illustrated and the amateur is shown simply and clearly how to use them. 100 pp. 7½in×5in. 4/6 net. By post 4/9 from all booksellers or The Publishing Dept., Dorset House, Stamford St., London, S.E.1. [F003

"PHOTOGRAPHIC Skies: How to Collect, Store and Use Them." By David Charles, F.R.P.S. Explains the technique by which the photographer can double-print cloud studies with other subjects to obtain attractive effects. 7½in×5in. 120 pp. 5/- net. By post 5/3 from all booksellers or The Publishing Dept., Dorset House, Stamford St., London, S.E.1. [F004

"A.P." Lens Testing Charts. 2nd Edition. By A. L. M. Sowerby, B.A., M.Sc., F.R.P.S. With these charts and the accompanying Instruction Manual to guide him, the amateur with an imperfectly adjusted camera can find how to convert it into an instrument of true precision. In envelope, 7½in×4¼in. 7/6 net. By post 7/9 from all booksellers or The Publishing Dept., Dorset House, Stamford St., London, S.E.1. [F005

BRASS, COPPER, DURAL, ALUMINIUM, BRONZE

ROD, BAR, SHEET, TUBE, STRIP, WIRE.

2,000 STANDARD STOCK SIZES

No Quantity too Small. List on application.

London: H. ROLLET & Co. Ltd. Liverp'l:

6, Chesham Place, S.W.1. Kirkby Estate.

SLOane 3463. SIMONSWOOD 3271/3

OUTPUT TRANSFORMERS. Parallel P/P 6L6's to 200 and 500 ohms. Secondaries 50-75 watts output size 4½ x 5 x 5in. Brand New. 17/6

RECTIFIERS. 12v. 2 amps. Westinghouse bridge type. Brand new. Ideal for Battery Chargers or Relay Operations. ... 11/6

ROTARY CONVERTOR. 6v DC to 190v 80 m/a. Ideal for portable rigs and Car Radio. H.T. 8/6

MODULATION TRANSFORMERS. U.S.A. manf. Potted. P/P211 to single 221 Ratio 1 to 1.2 100 watt size. Suitable P/P807's to 807 single 6/-

DRIVER TRANSFORMERS. Class B. Suitable 6L6 to P/P807's with monitor windings. 6/-

CONDENSERS. 6Mfd. 2000v test ... 3/-

CRYSTALS 500 Kc/s. 7/-

Please add something for Postage.

MONEY BACK GUARANTEE.

RADIO MAIL ORDER COMPANY

64-65 Church Lane, Wolverhampton.

ENGINEERS!

Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES". Full detail of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E., CITY & GUILDS (Electrical, etc.), MATRIC., etc., on "NO PASS—NO FEE" terms and details of Courses in all branches of Engineering—Mechanical, Electrical, Civil, Auto., Aero., Radio, etc., Building, etc. If you're earning less than £12 a week, tell us what interests you and write for your copy of "ENGINEERING OPPORTUNITIES" today—FREE!

176 PAGES Free!

B.I.E.T.

267 Shakespeare Hse., 17-29 Stratford Place, London, W.1.

CONDENSERS	Silver Mica · Tubular · Mansbridge
CRYSTALS	American · British
HEADPHONES	High and Low Impedance
METERS	Thermo · Moving Coil · Moving Iron
PLUG & SOCKETS	All Types
RESISTORS	Carbon and wire wound
VOLUME CONTROLS	Carbon and wire wound

We hold large and comprehensive stocks of new components and units, both Government and Manufacturers' Surplus

No. 19 Set, Equipment Available.

Wholesale and Export Only.

ANDERS RADIO LTD.

167, HAMPSTEAD ROAD, LONDON, N.W.1

EUS. : 1639 EST. 1928

TRANSMITTING CRYSTALS

A Colossal purchase of new Crystals from the Ministry of Supply enables us to make this unique offer. Your selection of six different frequencies from the list below for only 20/- carriage paid. (Note: each must be different and we reserve the right to make up with other frequencies should our stock be exhausted of any particular one ordered). All are made by S.T & C. Co., and at this price you can afford to experiment regrinding, as has been done successfully by several local amateurs Frequencies available:

Kc/s.	Kc/s.	Kc/s	Kc/s.
3400	3420	3480	3540
3580	3600	3700	3640
3660	3850	3900	3930
3940	3960	4000	4020
4080	4180	4200	4240
			4260

We also have a limited number of the 455 Kc/s. Crystal units available, 10/- plus 6d. postage.

WALTON'S WIRELESS STORES,

48, Stafford Street, Wolverhampton. Tel.: 22039

(Note change of address)



RELAYS AND KEY SWITCHES



LARGEST EX-GOVT. STOCK IN GT. BRITAIN

Types 600-3000 Relays — Siemens High Speed
Also A.C. 250 volts 50 cycles

Uniselector Switches, Telephone Switch-boards, Telephone Components, Plugs, Jacks, Handsets — Government Contractors.

JACK DAVIS (RELAYS) LTD. (Dept. W.)

36 PERCY STREET, LONDON, W.1

Phones: MUSeum 7965 LANgham 4821

—LYONS RADIO Ltd.—

AERIAL MASTS. Consist of four sections of stout all-weather resisting paxolin tubing each approx. 7ft. in length. Max. dia. 3¼in. Min. dia. 1½ in. ⅛ wall. Each section fits together with metal ferrules forming a mast 28ft. in height. Very light weight and can easily be raised by one man. Guy ropes, etc., are not supplied. **PRICE 42/-,** carriage 4/-. Top two sections only to form a mast 14ft. high. **PRICE 18/6,** carriage 2/6.

RECEIVERS TYPE R1224. A five valve superhet receiver with a frequency coverage of 1 to 9 m/c. (30 to 300 metres). Valves employed are VP23 (R.F. stage), FC2A (Mixer), VP23 (I.F. stage), 210LF (Detector), 220PA (Output). Batteries required for operation are: H.T. 120 v., G.B. 9 v., L.T. 2 v. Complete (less batteries) in wooden cabinet which might be soiled externally and slightly damaged but receivers in unused condition and tested before despatch and supplied with valves and L.R. phones in good working order. **PRICE £4/19/6,** carriage 5/-.

L.T. MAINS TRANSFORMERS. Primary: 200/250 v. 50 cps. Secondaries: 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24 and 30 v. at 2 amps. total loading. Brand new and guaranteed. **PRICE 17/6,** postage 1/6.

MAGNETIC TAPE RECORDER construction manual 3/6, post paid.

VALVE EQUIVALENTS MANUAL. Includes Services and commercial types 3/2, post paid.

3, GOLDHAWK RD. (Dept. M.W.), SHEPHERDS BUSH, LONDON, W.12

Telephone: SHEpherds Bush 1729

1 KW TELEGRAPH TRANSMITTERS. Two HF 300's output. Operation 3.5 mc to 16 mc.

HALLICRAFTERS BC 610's. Complete with speech amplifier, antenna tuning unit ; exciter units and coils for all bands.

LM-300 TRANSMITTERS (U.S.A.). 140 kc to 400 kc and 650 kc to 1,600 kc. 300 watt output.

No. 12 TRANSMITTERS. With coupling units, remote control etc.

AR.-77's NC 200, NC 45.

AUTOMATIC HIGH SPEED TELEGRAPH EQUIPMENT. "BOEHME" (U.S.A.). Up to 400 signs per minute on line and wireless.

NAVY MODEL TBY-8 TRANSMITTING-RECEIVING EQUIPMENT. Output 0.75 watts on M.C.W. telegraphy and 0.5 watts on telephony. Frequency range 28-80 mc.

SKYRIDER DIVERSITY HALLICRAFTERS RECEIVERS. Complete with console, power units and loudspeaker.

All above items in excellent working condition.

Working demonstration upon request.

TX VALVES 805, 807, 813, 814, 861, 866A, DET-16 and many others.

Large stock of Tx condensers, crystals and other components. Alignment and repair of communication receivers and all other short-wave equipment undertaken.

P.C.A. RADIO

Transmitter Division :—
The Arches, Cambridge Grove, London, W.6. *Tel. RIV 3279*

Receiver Division :—
170 Goldhawk Road, London, W.12. *Tel. SHE 4946*

"You're CERTAIN to get it at ARTHURS!"

★ **VALVES :** We have probably the largest stock of valves in the country. Send your enquiries.

AVO METERS IN STOCK

Avo Model 7	£19 10 0
Avo Model 8, high resistance	£19 10 0
Avo Model 40	£17 10 0
Heavy Duty	£13 13 0
Valve Tester	£16 10 0
Avo Minor, AC/DC model	£10 10 0
Electronic Test Meter	£40 0 0
Signal Generator	£30 0 0
Valve Characteristic Meter	£80 0 0
Universal Bridge	£26 0 0

★ Demonstration of Philips Projection Television set in our showrooms.

VALVE MANUALS
Mullard - - - -5/- ea.
Hivac, Part 1, 1/- Part 2, 2/-
Brimar - Teletube - and
Raito - - - 6/-
Mullard Valve Replacement Guide 1952-53, 2/6
Post 6d. each extra.
Send for catalogue.

TAYLORS METERS. List on request

DECCA PICK-UPS	£3 15 5
DECCA HEAD	£3 19 2
ADAPTOR for Garrard	3 3

All goods subject to price alterations and being unsold.

LONDON'S OLDEST LEADING RADIO DEALERS

Arthurs

EST. 1919

PROPS: ARTHUR GRAY, LTD. Terms C.O.D. or cash with order

Our Only Address. **Gray House, 150/152 Charing Cross Rd., London, W.C.2** *TEMple Bar 5833/4 and 4765*

ELECTRICAL, TELEVISION & RADIO ENGINEERS

GEE RADIO

SPECIALISTS IN

New Govt. Surplus components and special types of transmitting valves.

The following are a few of the different types available from stock :—

725a	VU508	9004
2J39	VS11	CMG22
931A	327A	CV67
878A	805	DLS10
1616	803	GT1C
860	VU120A	VS70
8012	CV173	717A
8011	CV303	VCR138
956	3BP1	3FP7
954	2X2	836
	50PF (Vacuum Condenser)	

—WHOLESALE AND EXPORT—

15 LITTLE NEWPORT ST., LONDON, W.C.2
GERrard 6794

VALVES!! TUBES!!

RECEIVING, TRANSMITTING, MAGNETRONS, KLYSTRONS, CATHODE-RAY TUBES, PHOTOCELLS, ETC.

LARGE QUANTITIES & GREAT VARIETIES

IMMEDIATE DELIVERIES FROM STOCK

WRITE OR 'PHONE:—

S. Szymanski

(pronounced SHE-MAN-SKEE)

ELECTRONIC ENGINEER & STOCKIST

95 STRODES CRESCENT
STAINES - MIDDLESEX

TELEPHONE: **STAINES 3971** *TELEGRAMS:* **SHEMANSKEE, STAINES**

PROBABLY THE LARGEST ACTUAL STOCKIST IN ENGLAND

WHOLESALE & EXPORT ONLY

INDEX TO ADVERTISERS

	PAGE
Acoustical Mfg. Co., Ltd.	7
Acru Electric Tool Mfg. Co., Ltd., The	102
Adcola Products, Ltd.	44
Advance Components, Ltd.	25
Aerolite, Ltd.	47
Alfa Precise Instrument Co.	99
All-Power Transformers, Ltd.	12
Ambassador Radio	49
Anders Radio, Ltd.	100
Antiference, Ltd.	20
Armstrong Wireless & Television Co., Ltd.	89
Arrow Sales, Inc.	90
Ashworth, H.	14
Astor Boisseller & Lawrence, Ltd.	34
Audigraph, Ltd.	96
Automatic Coil Winder & Electrical Equip. Co., Ltd., The	1
A.W.P. Radio Products	42
Bakaye "Sallurat" Radio	16
B. & H. Radio	94
Barker, A. C.	91
Belling & Lee, Ltd.	35
Berry's (Short Wave), Ltd.	44
Bird, S. S., & Sons, Ltd.	30
Birmingham Sound Reproducers, Ltd. .. 24,	50
Bradmatic, Ltd.	10
Brierley, J. H. (Gramophones & Recordings), Ltd.	32
Britain, Chas. (Radio), Ltd.	78
British Communications Corpn., Ltd.	87
British Institute of Engineering Technology	95, 100
British Insulated Callender's Cables, Ltd.	Cover ii
British National Radio School	90
British Physical Laboratories	22, 45
"British Plastics" Exhibition	35
British Sarosal, Ltd.	82
Brookes Crystals, Ltd.	95
Brown, S. G., Ltd.	12
Buchan, A. E.	90
Bulgin, A. F., & Co., Ltd. ..... 46, Edit.	249
Bull, J., & Sons	65
Bullers, Ltd.	42
Candler System Co.	97
Celestion	6
Champion Products	97
Chancery Precision Instrument Service, Ltd.	4
Chapman, C. T. (Reproducers), Ltd.	44
Cie Generale de Metrologie	40
Cinema-Television, Ltd.	29
Clydesdale Supply Co.	78
Cohen, D.	75
Cosmocord, Ltd.	54
Coventry Radio	100
Davis, Alec, Supplies, Ltd. 82,	93
Davis, Jack (Relays), Ltd.	100
Davis, J. A., & Co.	6
Day, Wm., Ltd.	96
Donohoe, J.	94
Dubilier Condenser Co. (1925), Ltd.	5
Duke & Co.	86
Dupley Electronics, Ltd.	92
Edison Swan Electric Co., Ltd.	27
Electradix Radios	93
Electro Acoustic Developments	46
Electronic Precision Equipment	68, 69
E.M.G. Handmade Gramophones, Ltd.	95
E.M.I. Institutes	38
E.M.I. Sales & Service, Ltd.	46
Enthoven, H. J., & Sons, Ltd.	33
Erskine Laboratories, Ltd.	8
Factor, J., Ltd.	96
Farmer, John	89
Felgate Radio, Ltd.	41
Ferranti, Ltd.	23
Fielden (Electronics), Ltd.	30
Fluxite, Ltd.	99
Frith Radiocraft, Ltd.	28
Galpins	87
Garland Bros.	97
Gee Bros., Radio, Ltd.	101
General Electric Co., Ltd.	17
Glaser, Ltd.	93
Goodmans Industries, Ltd.	3
Goodsell, Ltd.	43
Grampian Reproducers, Ltd.	30
Gray, Arthur, Ltd.	101
Hall Electric, Ltd.	4
Hallam, Sleigh & Cheston, Ltd.	42
Hartley, H. A., Co., Ltd.	84
Hayes Co., The	92
Haynes Radio, Ltd.	98
Hazlehurst Designs, Ltd.	34
Henley's, W. T., Telegraph Works Co., Ltd.	88
Henry's	81
Hivac, Ltd.	35
Holle, Arthur	98
Holley's Radio Stores	86
H.P. Radio Services, Ltd.	78
Iliffe & Sons Ltd. 48,	76
International Correspondence Schools	36
Johnsons (Radio)	98
Kolectric, Ltd.	20
Lasky's Radio 72,	73
Lawrence, G., & Co.	79
Leak, H. J., & Co., Ltd.	61
Lewis Radio Co.	90
Lockwood & Co.	98
London Central Radio Stores	31
London Radio Supply Co.	39
Lowther Mfg. Co.	94
Lyons, Claude, Ltd.	36
Lyons Radio	100
Mail Order Supply Co.	70
Major Distributors	24
Marconi Instruments, Ltd. 11,	49
Marconi's Wireless Telegraph Co., Ltd. 40,	58
McCarthy Radio	41
McElroy-Adams Mfg. Group, Ltd.	48
McMurdo Instrument Co., Ltd. 22,	79
Measuring Instruments (Pullin), Ltd.	38
Metropex, Ltd.	28
Midland Instrument Co.	49
Modern Book Co.	93
Modern Electrics, Ltd.	88
M.R. Supplies, Ltd.	44
M.S.S. Recording Co., Ltd.	9
Mullard, Ltd. 3,	52
Multicore Solders, Ltd. ..... Cover	iv
Murex, Ltd.	37
New Electronic Supplies Co.	86
Newman, J. & S., Ltd.	22
Northern Radio Services	89
Northern Transformers Co.	96
Nuscound Products	95
Oak Electric Co.	14
Olympic Radio Components	48
Osmor Radio Products, Ltd.	38
Painton & Co., Ltd.	16
Park Radio, Ltd.	26
Partridge Transformers, Ltd.	83
P.C.A. Radio	101
Pearce, T. W.	88
Pearson, J., & Sons (London), Ltd.	47
Penine Amplifiers	92
Post Radio Supplies	92
Pratts Radio	82
Premier Radio Co. 63, 64, 65,	66, 67
Quarts Crystal Co., Ltd.	98
Radio Exchange Co.	91
Radio Mail Order Co.	100
Radiomenders, Ltd.	48
Radio Merchandise Co., Ltd.	85
Radio Servicing Co.	94
Radiospares, Ltd.	96
Radio Supply Co.	80
Rainbow Mfg. Co., Ltd.	98
Record Electrical Co., Ltd., The	18
Reliance Mfg. Co. (Southwark), Ltd.	86
Reosound Engineering & Electrical Co.	99
Reproducers & Amplifiers, Ltd.	2
Roding Laboratories	18
Rogers Development Co.	10
Rollet, H., & Co., Ltd.	100
Royal Air Force, The	15
Runbaken Electrical Products	92
Salford Electrical Instruments, Ltd.	43
Samsons Surplus Stores	94
Sangamo Weston, Ltd.	59
Savage Transformers, Ltd.	88
Scharf, Erwin	16
Sifam Electrical Instrument Co., Ltd.	52
Simmonds Aerocessories, Ltd.	19
Simon Sound Service	18
Smith, G. W. (Radio), Ltd.	87
Smith, H. L., & Co., Ltd.	96
Sound Sales, Ltd.	10
Southern Radio Supply, Ltd.	94
Spencer-West	98
Stability Radio Components, Ltd.	45
Standard Telephones & Cables, Ltd. .. 53,	56
Starr-Free	80
Starr British Products	92
Steatite & Porcelain Products, Ltd.	15
Stern Radio, Ltd.	71
Stratton & Co., Ltd.	12
Sugden, A. R., & Co. (Engineers), Ltd.	36
Supacoils	97
Szymanski, S.	101
Taylor Electrical Instruments, Ltd.	21
Telecraft, Ltd.	10, 98
Telegraph Condenser Co., Ltd. ..... Cover	iii
Telegraph Construction & Maintenance Co., Ltd., The	2
Tele-Radio (1943), Ltd.	40
Thermionic Products, Ltd.	35
True Electrical Co., Ltd. ..... Edit.	247
Uncles, Bliss, & Co., Ltd.	20
Universal Electrical Instruments Corpn.	81
University Radio, Ltd.	62
Valradio, Ltd.	26
Vardiz Sales, Ltd.	6
V.E.S. Wholesale Services, Ltd.	82
Vitavox, Ltd.	46
Voigt Patents, Ltd.	94
Vortexion, Ltd.	87
Walton's Wireless Stores	100
Wayne Kerr Laboratories, Ltd., The	34
Webb's Radio	47
Westinghouse Brake & Signal Co., Ltd.	41
Wharfedale Wireless Works 14,	26
Whiteley Electrical Radio Co., Ltd.	58
Wilne Electronics	97
Wilkinson, L.	100
Wolf Electric Tools, Ltd.	59
Wright & Weaire, Ltd.	60
Young, C. H.	82

The new PYROBIT MINIATURE Soldering Iron

has a Cork Handle which makes soldering a pleasure. Weight only 3½ ounces.

Ideal for Television, Radio, Radar, etc.

Ask for leaflet

Price 19/6

The ACRU Electric Tool Manufacturing Co. Ltd.,

123, Hyde Road, Ardwick, Manchester, 12

Printed in Great Britain for the Publishers, ILIFFE & SONS LTD., DORSET HOUSE, Stamford St., London, S.E.1, by CORNWALL PRESS LTD., Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA AND NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd., William Dawson & Sons (S.A.), Ltd. UNITED STATES: The International News Co.

Condenser leadership -from the inside!

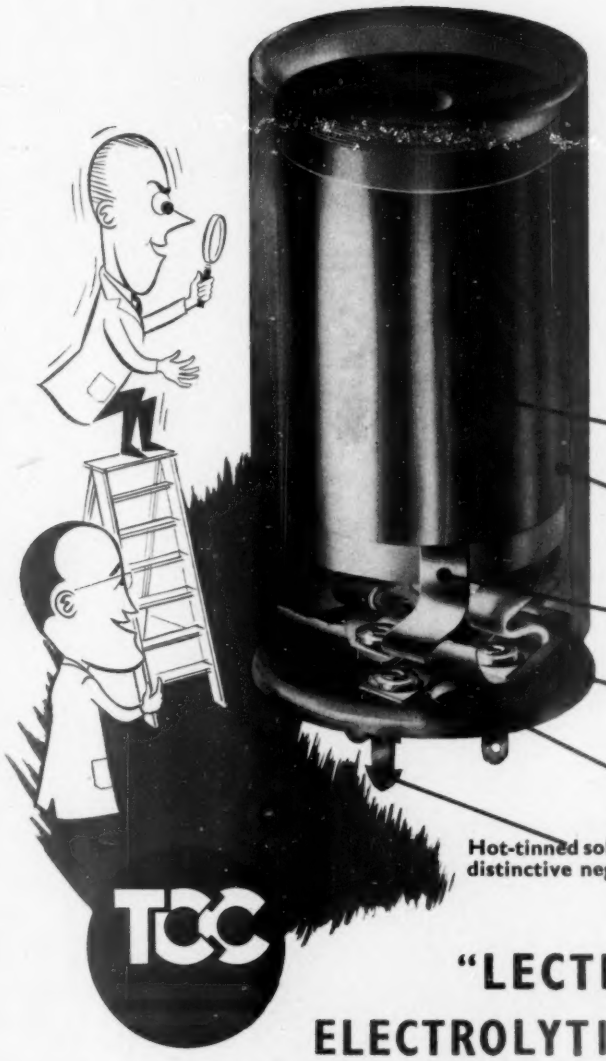

The most comprehensive range of Electrolytic Condensers offered by one manufacturer. Features include robustness, compact construction, and a very wide temperature rating varying between – 30°C. to + 60°C. for plain foil types.

Not only are they suitable for working up to the voltage stated but they will operate up to 71°C. at 80% of the rated voltage.

Concentric winding of pure aluminium foil and absorbent interleaving tissues.

Viscous electrolyte ensures low power factor and long life over wide temperature range.

"ALL-ALUMINIUM" non-corrosive internal construction.

Full hermetic sealing by means of special rubberised disc.

Efficient safety vent for fault conditions.

Hot-tinned solder tags: distinctive negative.

TCC

"LECTROPACK" DRY ELECTROLYTIC CONDENSERS

THE TELEGRAPH CONDENSER CO. LTD . *RADIO DIVISION* · LONDON · W.3 · Tel : Acorn 0061 (9 lines)

The *correct* solder

ALLOY ✓ GAUGE ✓ FLUX PERCENTAGE ✓

for every type of radio & television component

The wide range of alloys, gauges and flux percentages of Ersin Multicore Solder provide all the solder specifications required by component manufactures. 22 S.W.G. Ersin Multicore Solder—little thicker than a hair—with, of course, three cores of extra-active, non-corrosive Ersin Flux—enables sound joints to be made in the production of even the smallest miniature components :

SIZE 1 CARTONS—5/- RETAIL

Catalogue Ref. No.	Alloy Tin/Lead	S.W.G.	Approx. length per carton
C 16014	60/40	14	13 feet
C 16018	60/40	18	37 feet
C 14013	40/60	13	13 feet
C 14016	40/60	16	26 feet

Left
The Plessey Company Ltd., Ilford, use only Ersin Multicore Solder in the manufacture of their components.

Right
Soldering caps and wires of radio type tubular paper capacitors with Ersin Multicore Solder at the Dubilier Works, London.

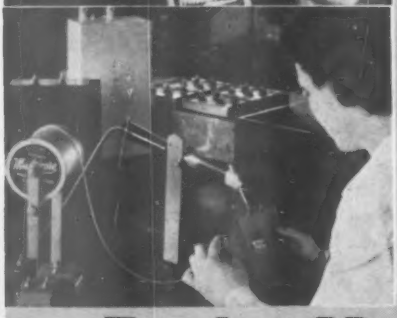

Left
Ersin Multicore Solder being used for soldering condenser connections at the factory of T.C.C., London.

Right
Soldering condensers at A. H. Hunt Ltd. The condensers are heated together with short, pre-cut lengths of Ersin Multicore.

Ersin Multicore Solder

MULTICORE SOLDERS LTD., ALBEMARLE STREET, LONDON, W.1 • REGent 1411